

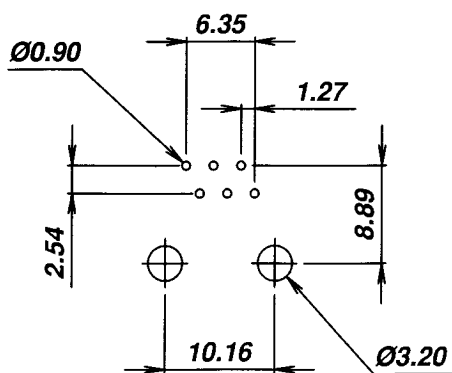
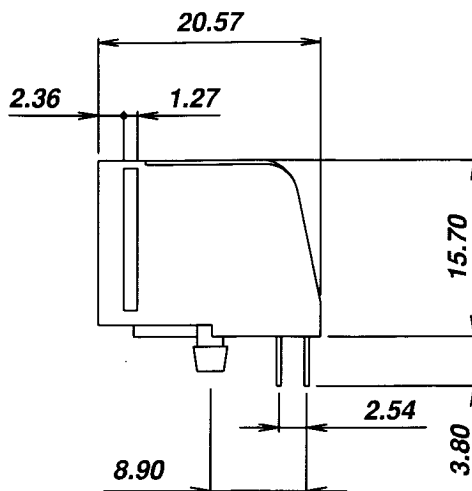


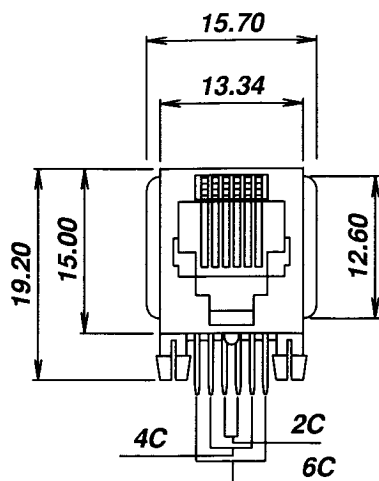

PCB LAYOUT



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.35mm Thickness Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C

AJ-005-6-X-X

B=6p2c, C=6p4c
 D=6p6c

Gold plated 1=15u , 3=50u
 2=30u , 4= 6 u

DWG. NO.
AS005001

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	Steven CK'D Johnn APP'D Billy	JUL-30 '04 JUL-30 '04 JUL-30 '04
	ANGLE +0°30'	RADIL	+0.45 -0.15		

TITLE
RJ45 SIDE ENTRY PCB JACK UL & cUL FILE NO. E131820
MODULAR JACKS ASSY FOR AJ-005-6-X-X
SCALE SIZE DWG. NO.9602 SERIES