

RAINBOW CABLE

UL & CSA GRADE:

UL STYLE: 2651	CSA STYLE: C22.2 NO.210.2
Rate temperature: 105°C	Rate temperature: 105°C
Rate voltage: 300V	Rate voltage: 300V
Flame Test: VW-1	Flame Test: FT1, FT2


PHYSICAL PROPERTIES:

after 7 days air oven at 136°C
 Average tensile strength: 1500 lbf/inch²
 Percent of original: 70% at least
 Average elongation: 200%
 Percent of original: 65% at least


ELECTRONIC CHARACTERISTICS:

Spark test: 2500V	Capacity: 40pF/m
Dielectric strength test: min. 2 KV in 1 minute	Inductance: 1.45 μ H/m
Conductor resistance: Max. 237 Ω /km	Impedance: 100 Ω
Insulation resistance: Min. 100 M Ω /km	Propagation Delay Time: 4.2ns/m

CONSTRUCTION DRAWING:

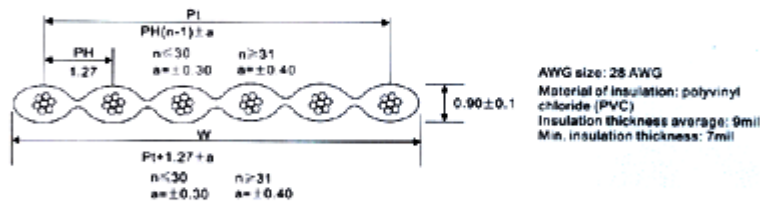

Sample

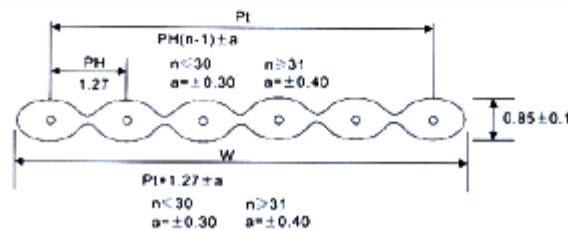

USAGE:

Internal connection for computer, duplicator, facsimile, game, interface and many other electronic equipments.