







RoHS
Compliance

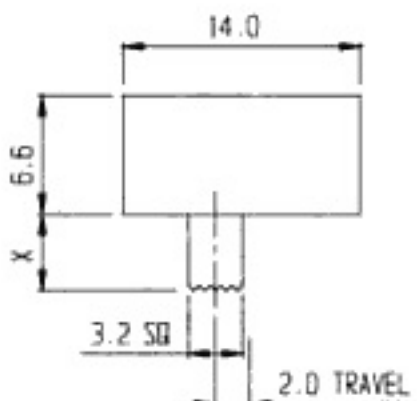

SCHEMATIC



PCB LAYOUT

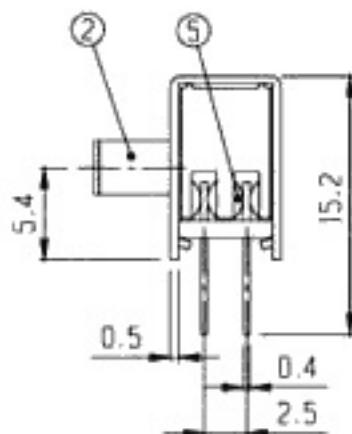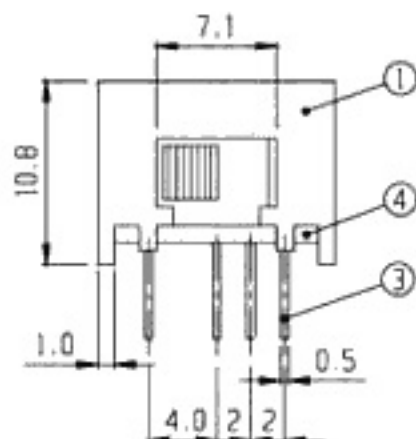

7	BALL	STEEL	1					
5	CONTACT	P B S	2	Ag PLATED	6	SPRING	STEEL WIRE	1
3	TERMINAL	BRASS	8	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1 NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1 EG 3-12
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY REMARKS

ISSUED

SPECIFICATION

TITLE: SIDE KNOB SLIDE SWITCH (2P3T)



RATING: DC 30V 0.5A
 CONTACT RESISTANCE: 30mΩ max.
 INSULATION RESISTANCE: 500MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 10K cycles min.

MODEL NO: SK-23D07 (EG)

TOLERANCE	UNIT: MM	DWN.	hms
UP TO 1.0: ±0.1	SCALE: 2.5:1	CHK'D.	hms
1.0 TO 10.0: ±0.2	VERSION: 01	APPD.	hms
OVER 10.0: ±0.3	DRWG NO:		