






Non-shorting
shorting

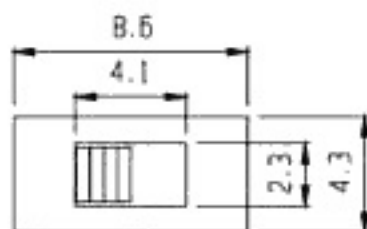

SCHEMATIC



PCB LAYOUT

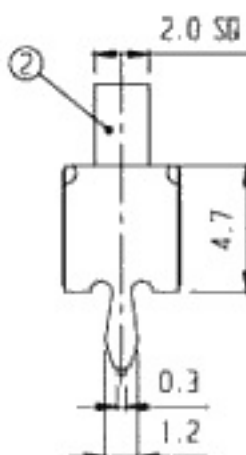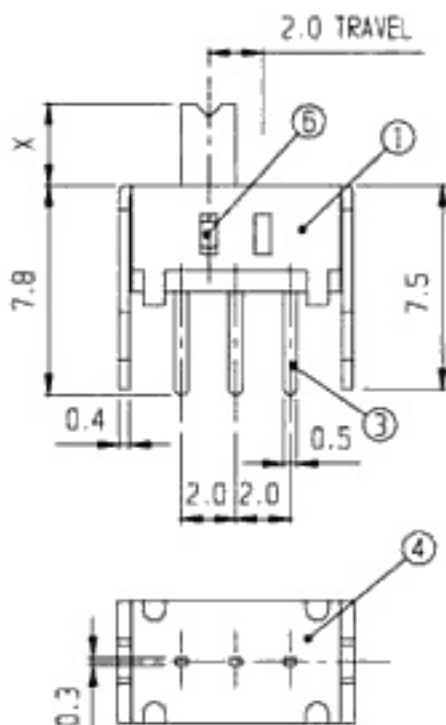

RoHS
Compliance

5	CONTACT	P B S	1	Ag PLATED	6	SPRING PLATE	P B S	1	
3	TERMINAL	BRASS	3	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	SPCC	1	Ni PLATED	2	KNOB	P O M	1	VG 2-9
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (1P2T)

RATING: DC 30V 0.3A
CONTACT RESISTANCE: 30mΩ max.
INSULATION RESISTANCE: 500MΩ at 500V DC
WITHSTAND VOLTAGE: AC 500V for 1 minute
OPERATION FORCE: REFER ATTACH SPECIFICATION
SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-12D01(VG)

TOLERANCE	UNIT: MM	DWN.	
UP TO 1.0:±0.1	SCALE: 4:1	CHK'D.	
1.0 TO 10.0:±0.2	VERSION: 02	APPD.	
OVER 10.0:±0.3	DRWG NO:		

