

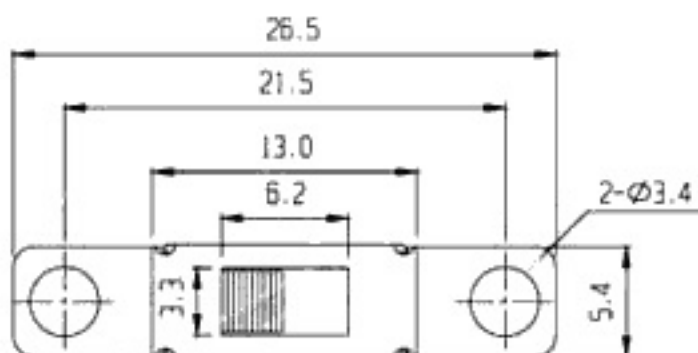



SCHEMATIC

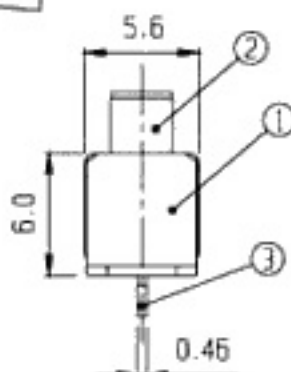

PCB LAYOUT

RoHS
Compliance

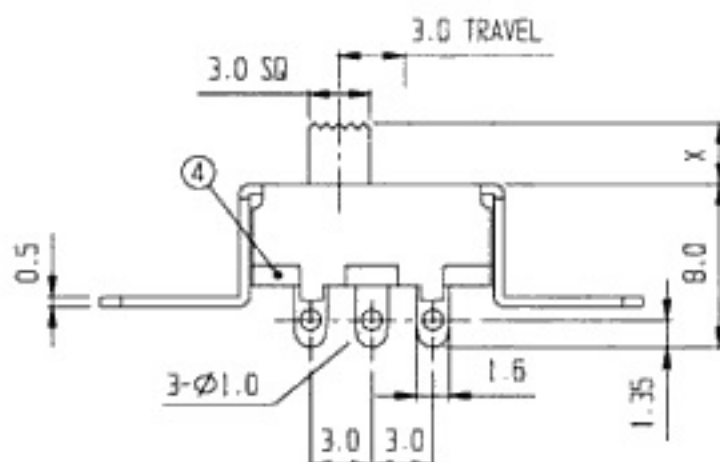

5	CONTACT	BRASS	1	Ag PLATED	6	SPRING	STEEL WIRE	1	
3	TERMINAL	BRASS	3	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	SPCC	1	Ni PLATED	2	KNOB	P O M	1	EG 2-15
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (1P2T)



RATING: DC 30V 0.3A
CONTACT RESISTANCE: 30mΩ max.
INSULATION RESISTANCE: 500MΩ at 500V DC
WITHSTAND VOLTAGE: AC 500V for 1 minute
OPERATION FORCE: REFER ATTACH SPECIFICATION
SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-12F48(EG)

TOLERANCE UNIT: MM
UP TO 1.0:±0.1 SCALE: 3:1
1.0 TO 10.0:±0.2 VERSION: 01
OVER 10.0:±0.3 DRWG NO: APPD.

DWN. *hws*
CHK'D. *hws*
APPD. *hws*