



RoHS  
Compliance

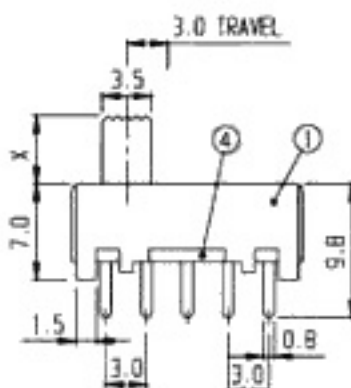

|    |          |            |     |           |    |               |              |             |
|----|----------|------------|-----|-----------|----|---------------|--------------|-------------|
| 7  | SPRING   | STEEL WIRE | 1   |           |    |               |              |             |
| 5  | BALL     | STEEL      | 1   |           | 6  | CONTACT       | P B S        | 2 Ag PLATED |
| 3  | TERMINAL | BRASS      | 10  | Ag PLATED | 4  | TERMINAL BASE | PHENOL RESIN | 1 NATURAL   |
| 1  | FRAME    | S P C C    | 1   | Ni PLATED | 2  | KNOB          | P O M        | 1 EG 4-11   |
| NO | PART     | MATERIAL   | QTY | REMARKS   | NO | PART          | MATERIAL     | QTY REMARKS |

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (2P4T)



RATING: DC 30V 0.3A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 500MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-24F03 (EG )

TOLERANCE

UNIT: MM

DWN.

UP TO 1.0:±0.1

SCALE: 2:1

CHK'D.

1.0 TO 10.0:±0.2

VERSION: 01

OVER 10.0:±0.3

DRWG NO:

APPD.