

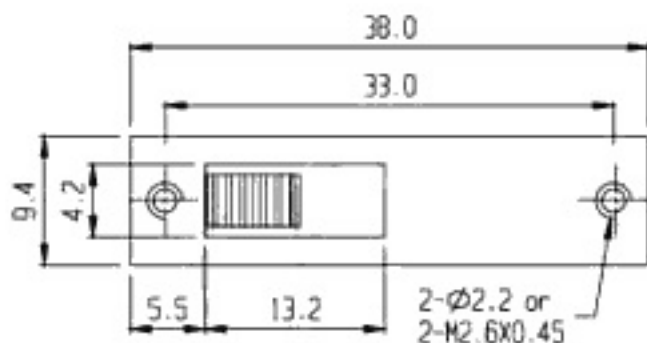



SCHEMATIC

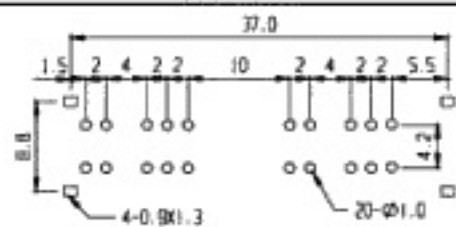

PCB LAYOUT

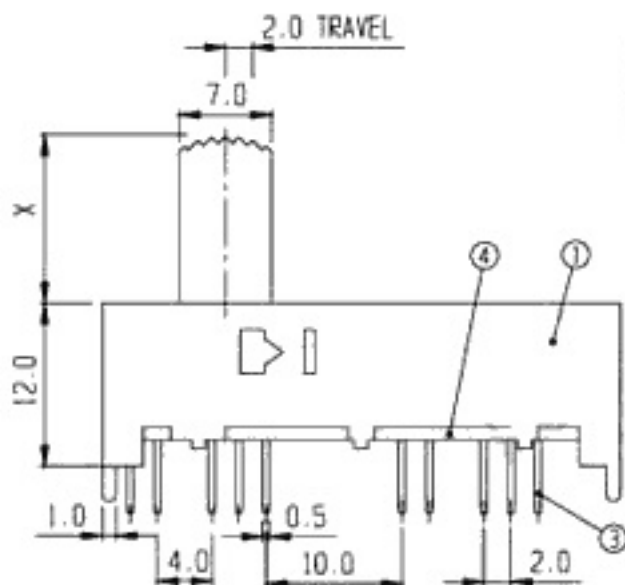

RoHS  
Compliance

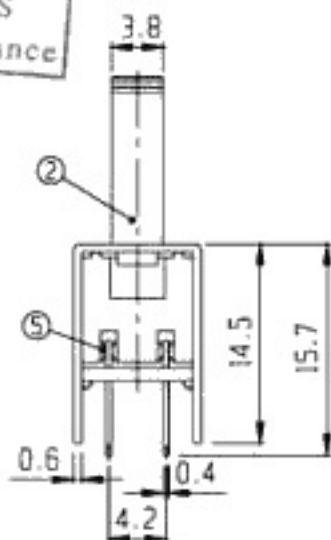

| 7  | BALL     | STEEL    | 2   |           |    |               |              |     |         |
|----|----------|----------|-----|-----------|----|---------------|--------------|-----|---------|
| 5  | CONTACT  | P B S    | 4   | Ag PLATED | 6  | SPRING        | STEEL WIRE   | 1   |         |
| 3  | TERMINAL | BRASS    | 20  | Ag PLATED | 4  | TERMINAL BASE | PHENOL RESIN | 1   | NATURAL |
| 1  | FRAME    | S P C C  | 1   | Ni PLATED | 2  | KNOB          | P O M        | 1   | G 2-15  |
| NO | PART     | MATERIAL | QTY | REMARKS   | NO | PART          | MATERIAL     | QTY | REMARKS |

ISSUED

SPECIFICATION

TITLE: SLIDE SWITCH (4P4T)



RATING: DC 30V 0.5A  
 CONTACT RESISTANCE: 30mΩ max.  
 INSULATION RESISTANCE: 500MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 500V for 1 minute  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 10K cycles min.

MODEL NO: SS-44D01(G)

|                  |             |        |  |
|------------------|-------------|--------|--|
| TOLERANCE        | UNIT: MM    | DWN.   |  |
| UP TO 1.0:±0.1   | SCALE: 2:1  | CHK'D. |  |
| 1.0 TO 10.0:±0.2 | VERSION: 01 | APPD.  |  |
| OVER 10.0:±0.3   | DRWG NO:    |        |  |