

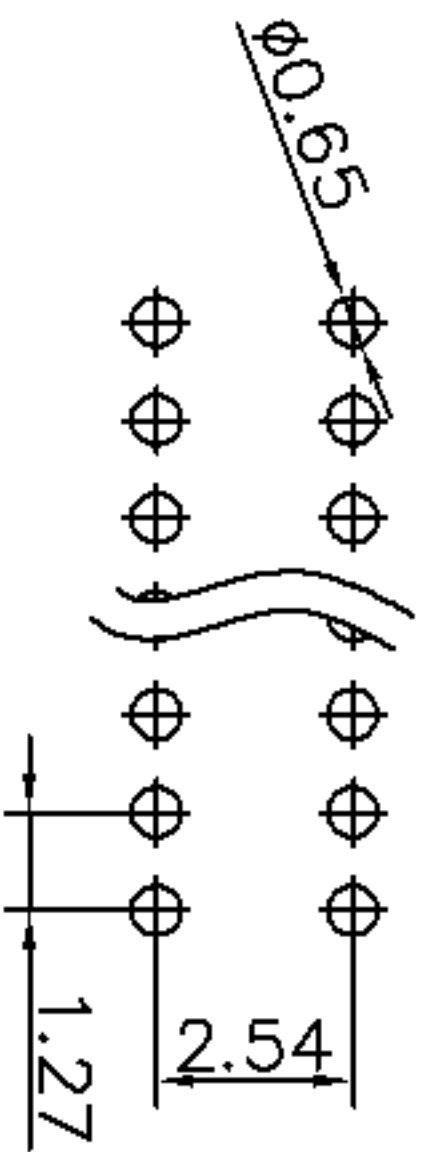
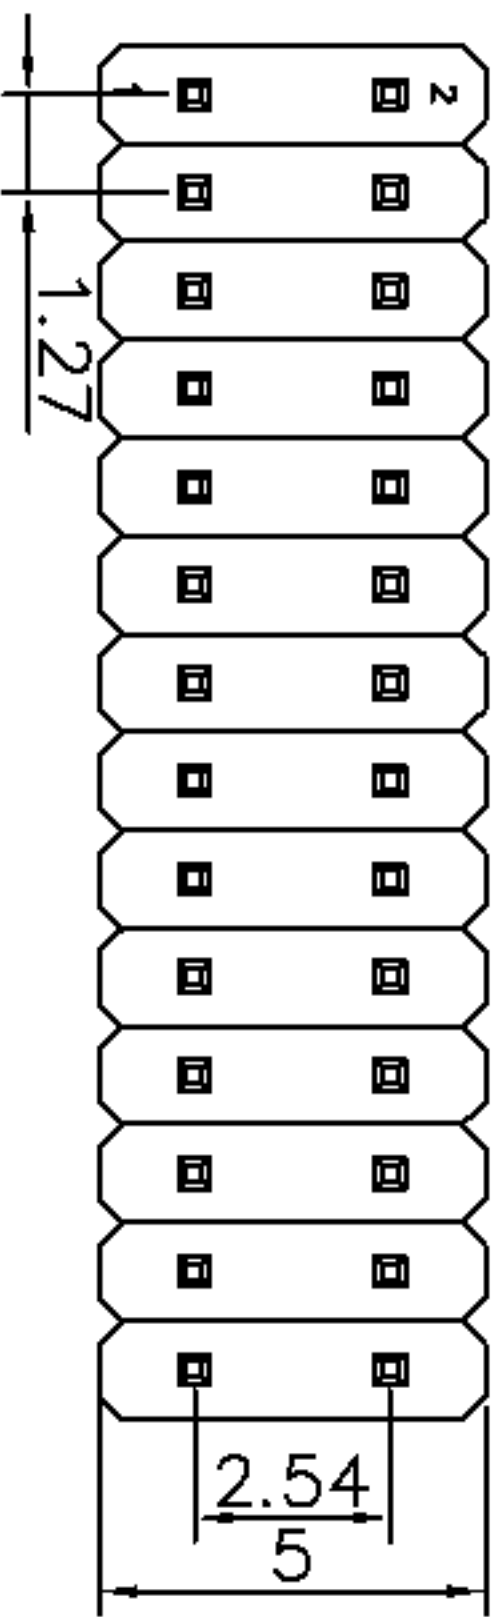


	A		新版图	2011.09.07
			/	L2M

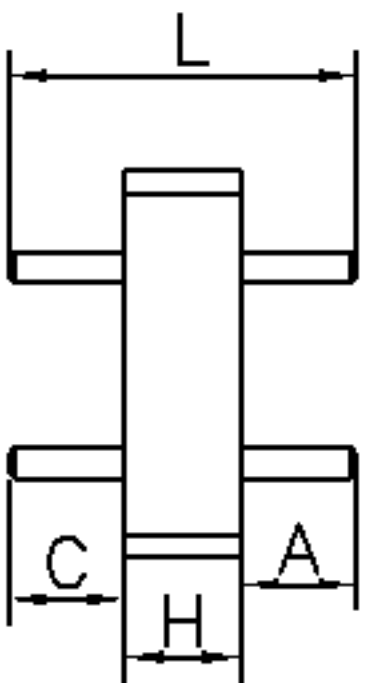

PCB Layout

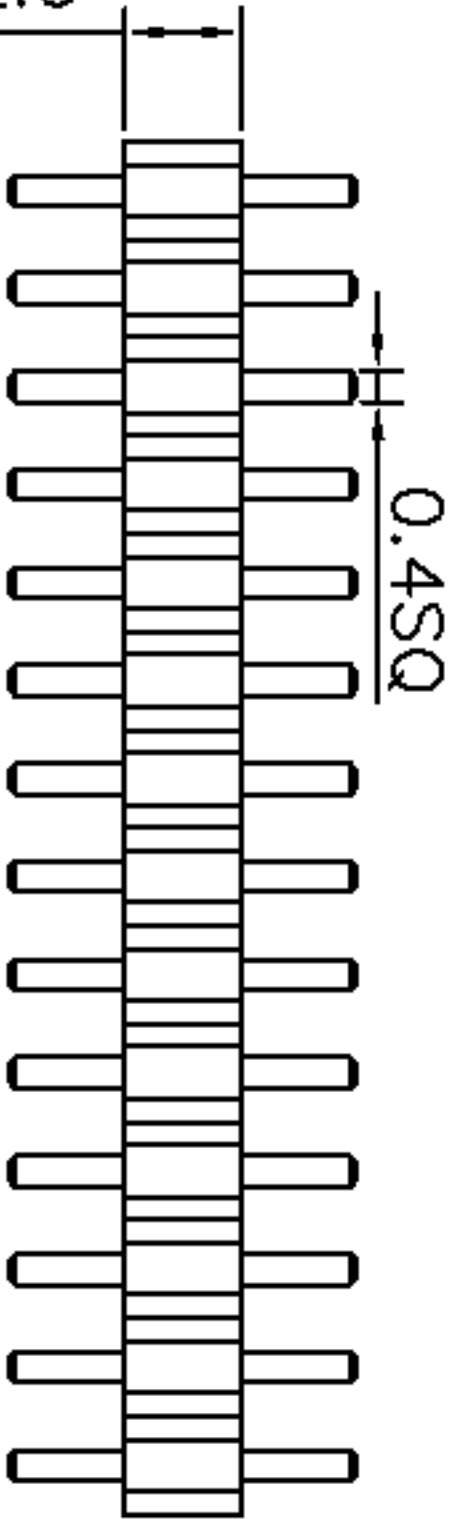

H、L、A、C的尺寸
可依客户要求订做

Specification:
Current Rating:1Ampere
Insulation Resistance :1000M ohms Min.
Dielectric Withstading :300V AC
Contact Resistance: 20m ohms Max.
Operating temprature:-40° C to +105° C
Material:
Cotnact: Brass,Gold Flash or per Require
Housing:Nylon6T UL 94V-0

1101-427S12XX A-H-L
1.27PIN距单塑胶双
排直式排针系列

A: 两排针排距2.54
B: 两排针排距1.27
每排PIN数

DRAWN	DATE	TITLE:	
YSH	2011.09.07	排针系列-1.27*2.54PIN距-双排 单塑胶-直式	
CHECKED	DATE	RFQ NO	CLIENT P/N
CLIENT APPROVED	DATE	UNIT: mm	SCALE: free
FILE NO.: YH20120525A007		武汉宇恒电子有限公司 WUHAN YU HENG ELECTRONIC CO., LTD	