

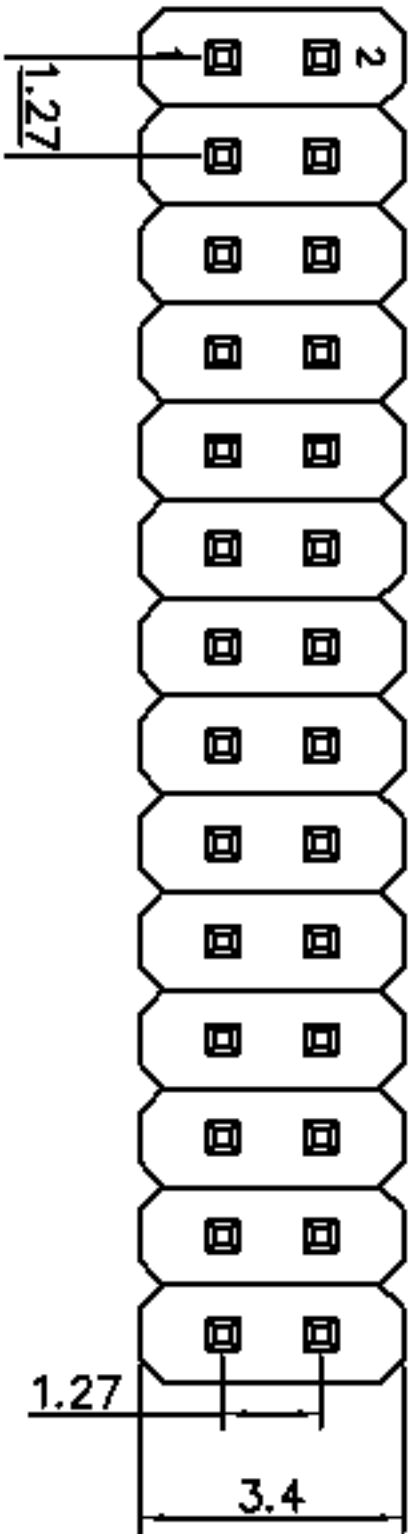


	A		新版图	/
				2011.09.07
				L2M

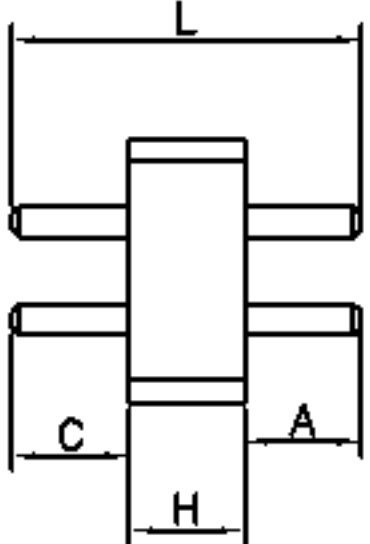

PCB Layout

0.45Q

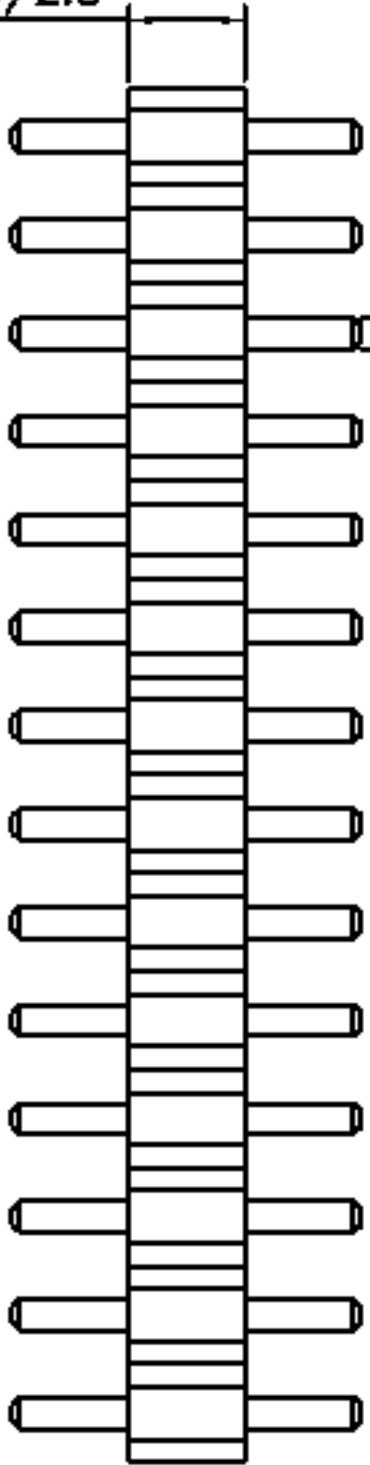

H、L、A、C的尺寸
可依客户要求订做

Specification:
Current Rating:1Ampere
Insulation Resistance :1000M ohms Min.
Dielectric Withstanding :300V AC
Contact Resistance: 20m ohms Max.
Operating temperature:-40° C to +105° C
Material:
Cotnact: Brass,Gold Flash or per Require
Housing:Nylon6T UL 94V-0

1.0/1.5/1.6/1.7/2.0/2.5

1101-427R12XXB-H-L

1.27PIN距单塑胶双

排直式排针系列

塑高

总高

A: 两排针排距2.54

B: 两排针排距1.27

每排PIN数

			DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
			YSH	2011. 09. 07	
TOLERANCE			CHECKED	DATE	TITLE: 排针系列-1.27*1.27PIN距-双排 单塑胶-弯式
TOL ON				ANGLE	
.XXX =	0.05				
.XX =	0.15	1°	CLIENT APPROVEDATE		
.X -	0.20	2°			
X. =	0.30				
			RFQ NO		FILE NO.: YH20120525A008
			CLIENT P/N		
			UNIT: mm	SCALE: free	