

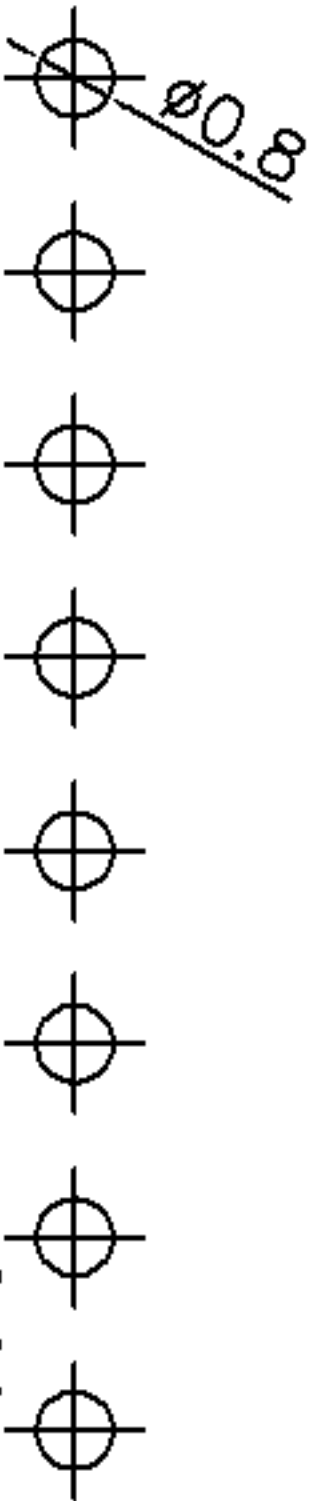


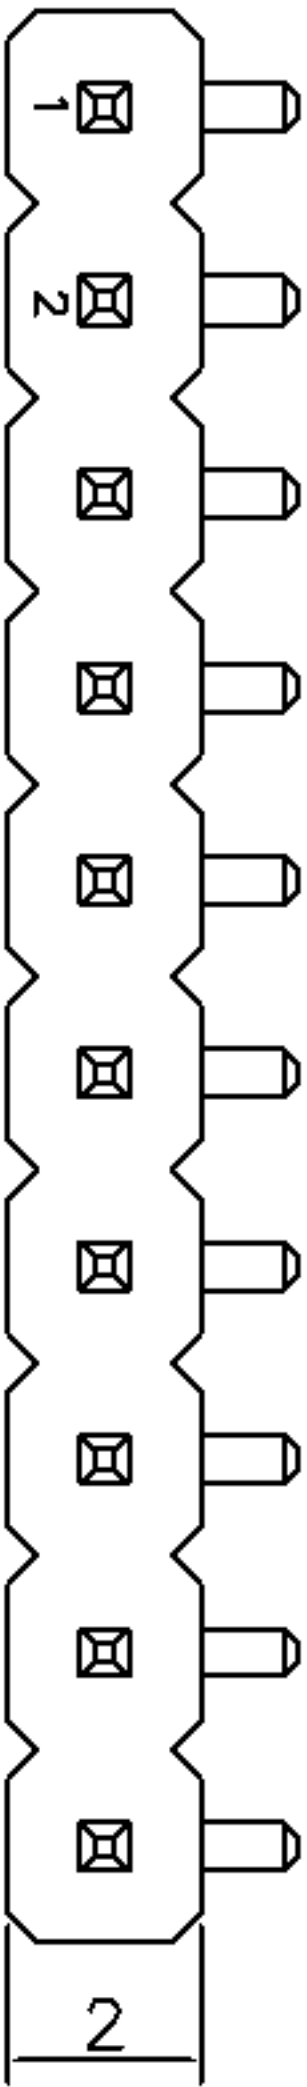


PCB Layout

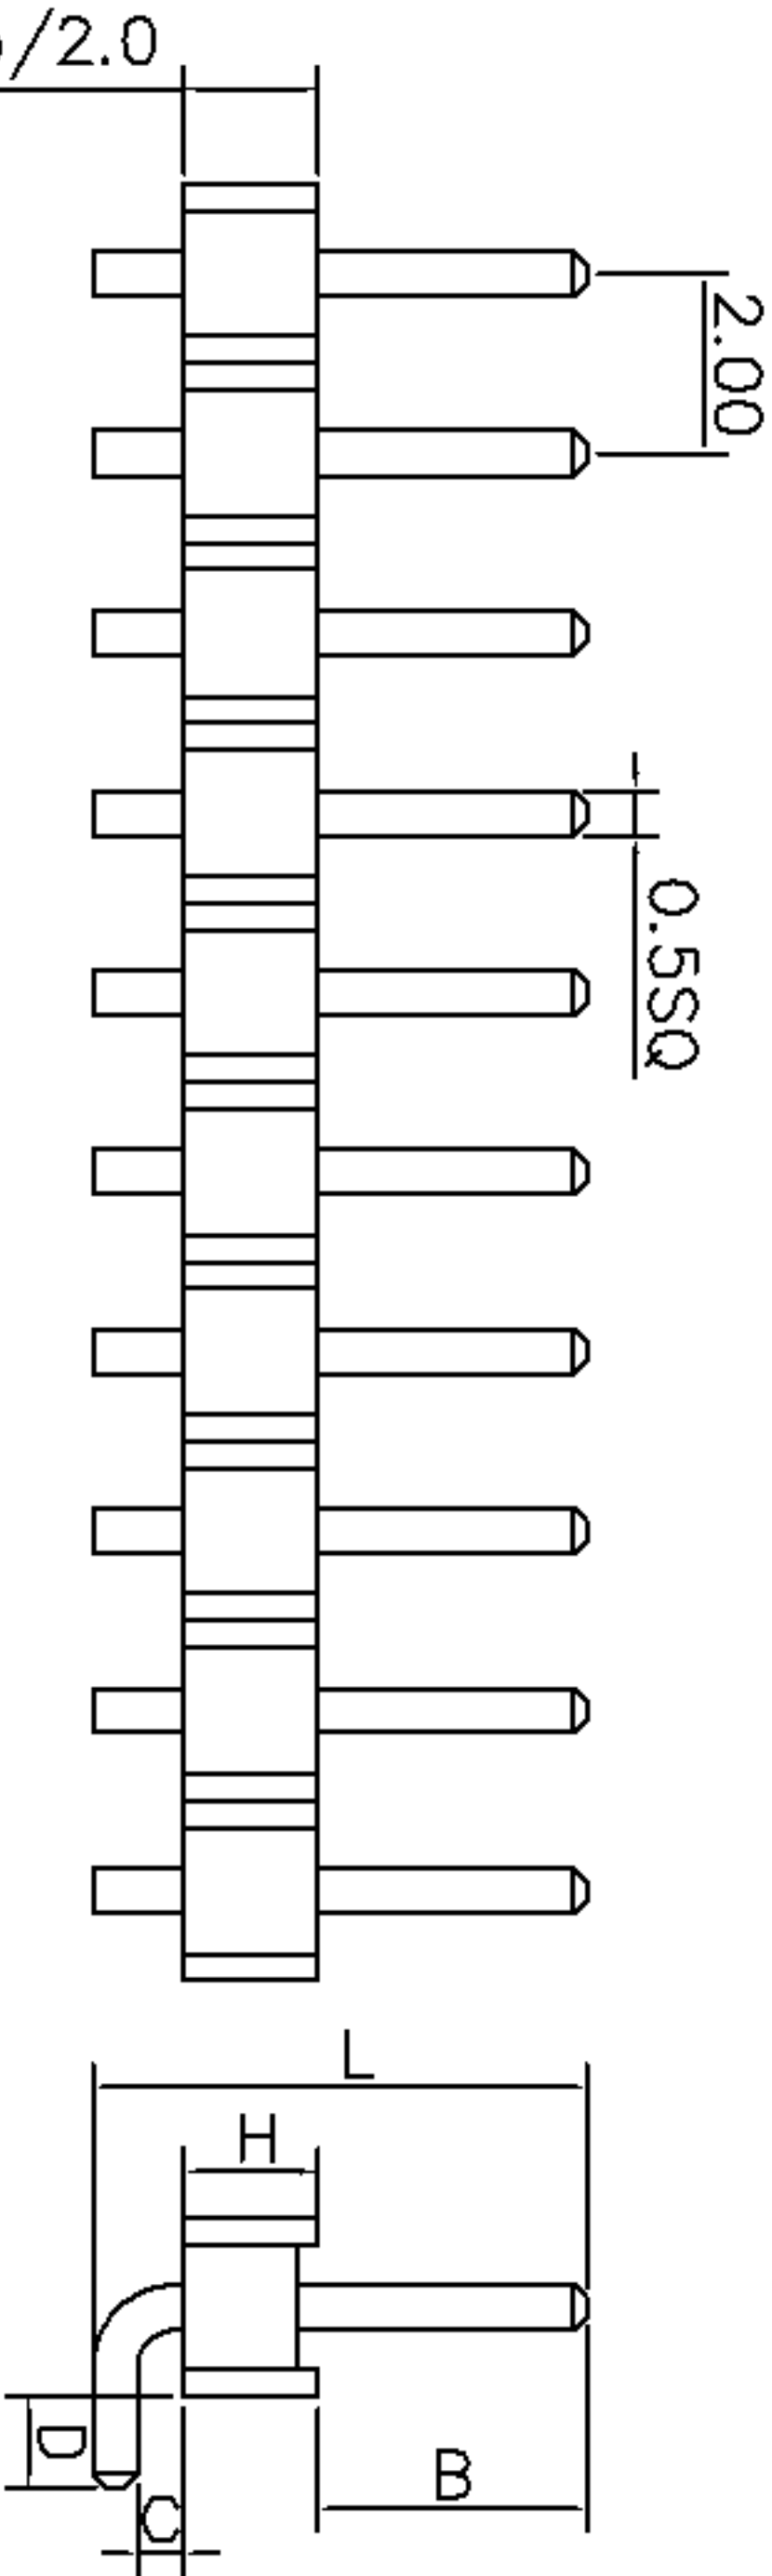


H、L、B、C、D尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material:Brass
Insulator Material:PA66+30%GF
Electrical:
Current rating:1.5Amps/Contact max.
Contact resistance:<=20mohms/Contact
Insulation resistance:>=1000Mohms at V=100V
Withstanding Voltage:450V AC/Minute
Mechanical:
Operating Temperature:Gold plated :-55° C~105° C
Tin plated :-40° C~105° C
Soldering Temperature:260° C 10s Max.

1101-200R11XX2-H-L
2.0PIN距单塑胶单排
弯式排针系列

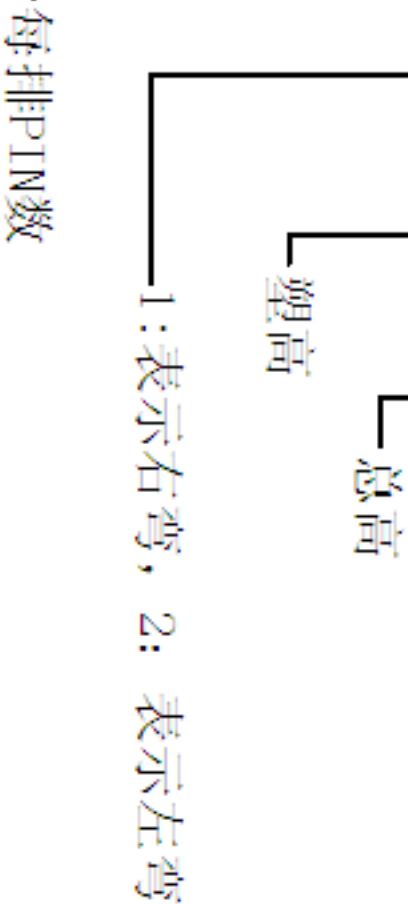

TOLERANCE			DRAWN	DATE	CHECKED	DATE	CLIENT APPROVED	DATE	RFQ NO	CLIENT P/N	UNIT	SCALE	FILE NO.
TOL	ON	ANGLE											
.XXX±	0.05		YSH	2012.05.23						1101-200R11XX2-XX	mm	free	YH20120602A004
.XX±	0.15	1°											
.X±	0.20	2°											
X.±	0.30												

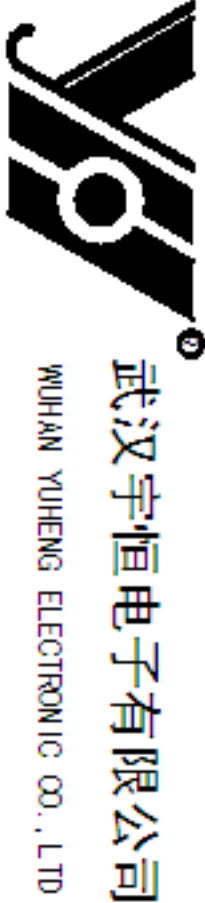

TITLE:
排针系列-2.00 PIN距-单排-单塑胶-正弯