


PCB Layout

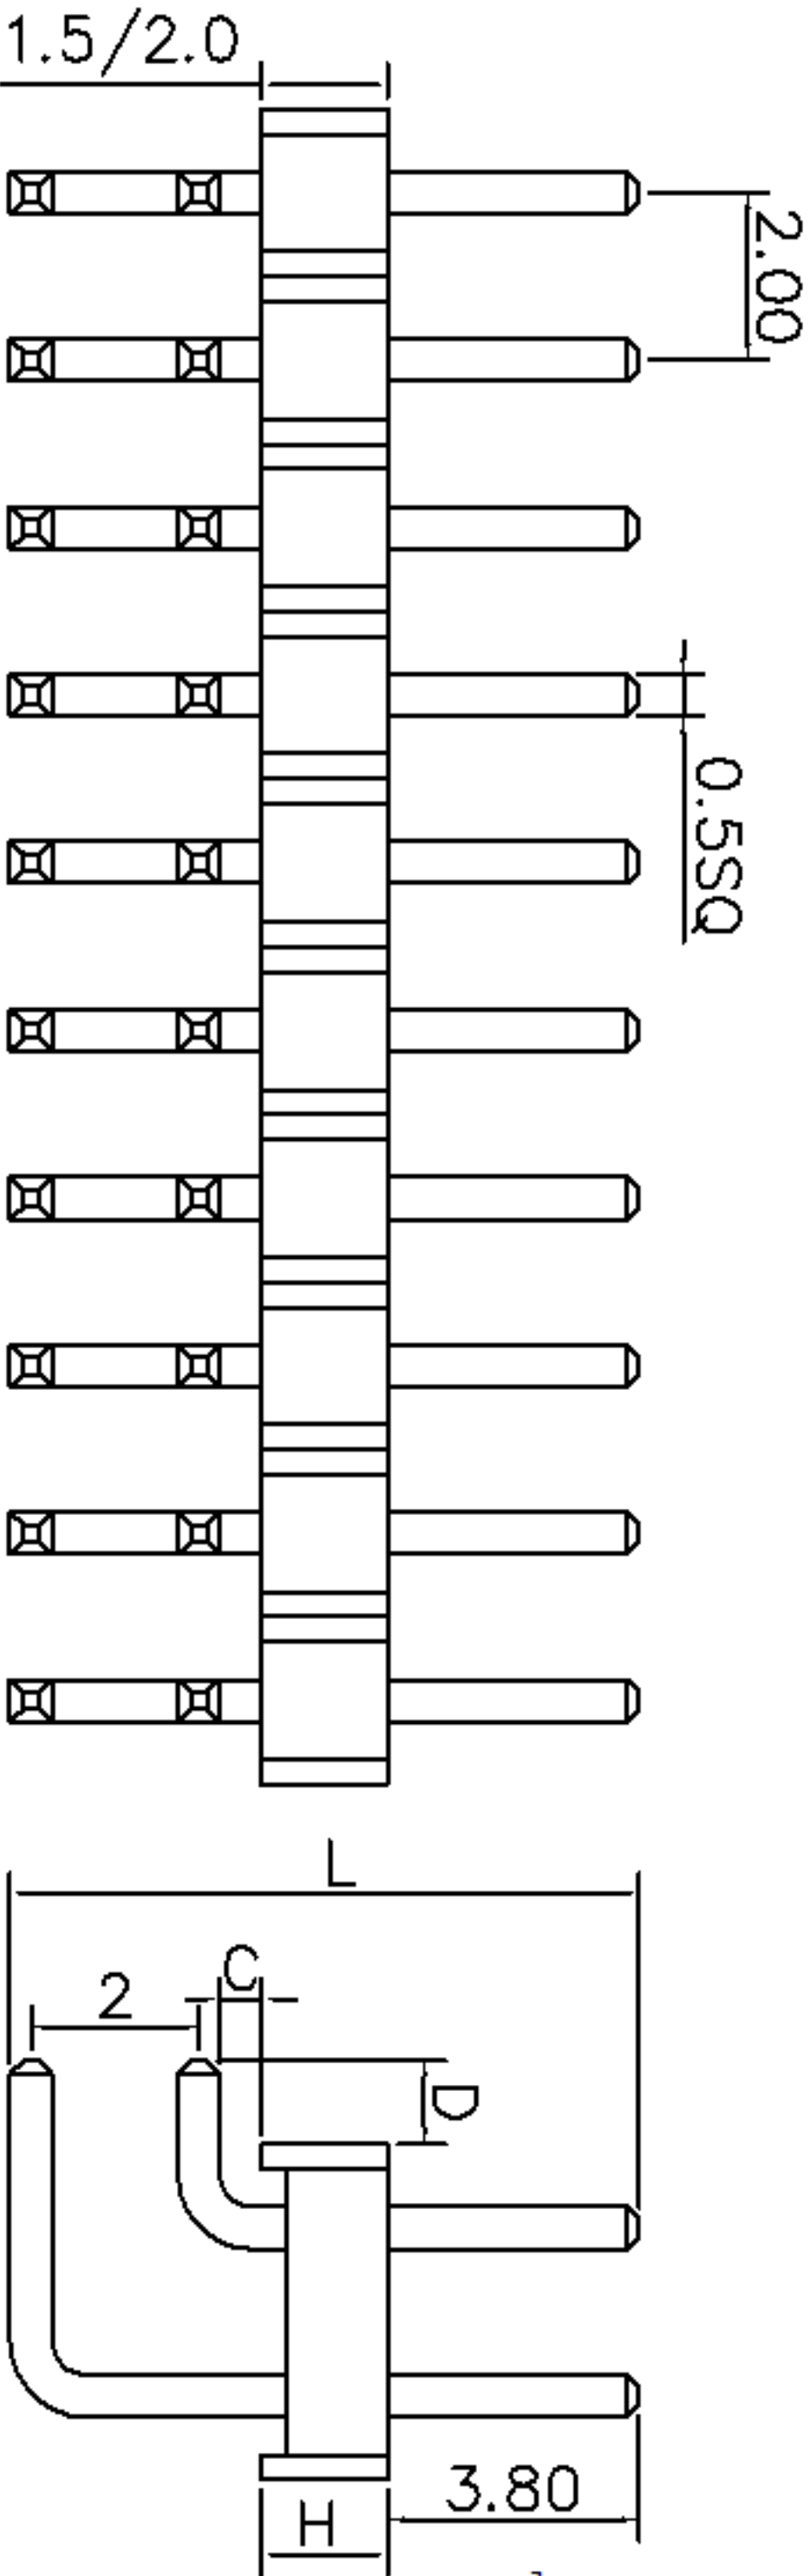

H、L、C、D 的尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material: Brass
Insulator Material: PA66+30%GF
Electrical:
Current rating: 1.5Amps/Contact max.
Contact resistance: $\leq 20\text{mohms/Contact}$
Insulation resistance: $\geq 1000\text{Mohms at } V=100\text{V}$
Withstanding Voltage: 450V AC/Minute
Mechanical:
Operating Temperature: Gold plated: $-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Tin plated: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Soldering Temperature: $260^{\circ}\text{C } 10\text{s Max.}$

TOLERANCE			DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
TOL		ANGLE	YSH	2012. 05. 23	
ON			CHECKED	DATE	TITLE: 排针系列-2. 00 PIN距-双排-单塑胶 反弯针
.XXX±	0.05				
.XX ⊥	0.15	1°			
.X ±	0.20	2°			
X. ±	0.30				

CLIENT APPROVED		DATE
RFQ NO		
CLIENT P/N		
UNIT: mm	SCALE: free	
FILE NO.: YH20120602A012		

1101-200R12XXX1-H-L

2.00 PIN距单塑胶双排
弯式排针系列

塑高

总高

1:表示反弯, 2:表示正弯

每排PIN数