

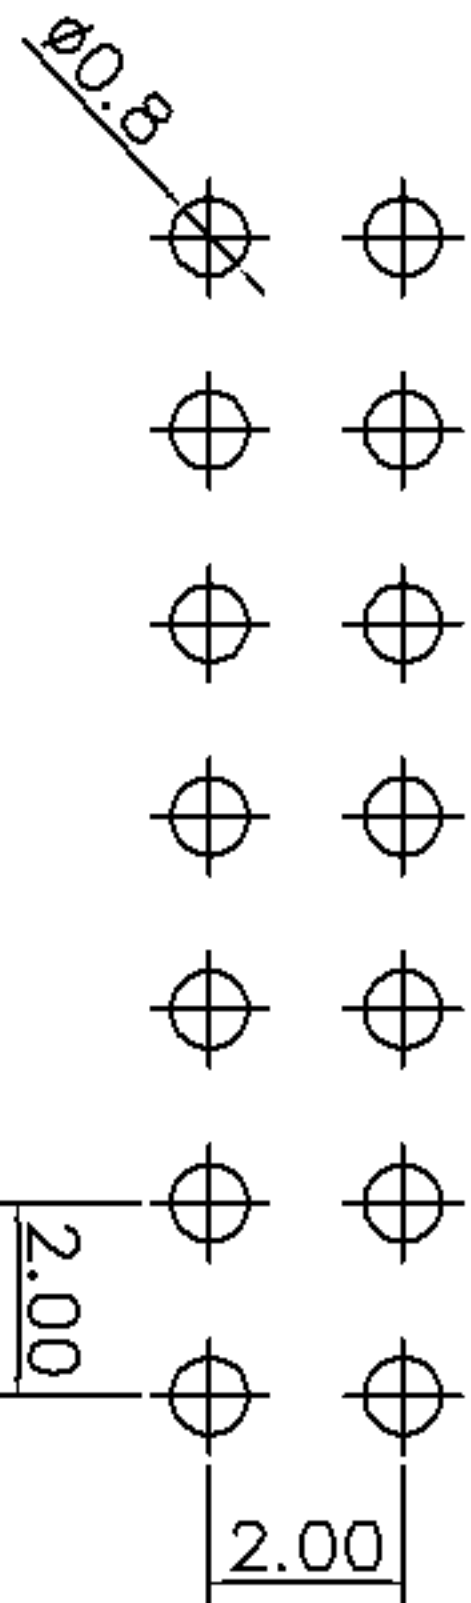
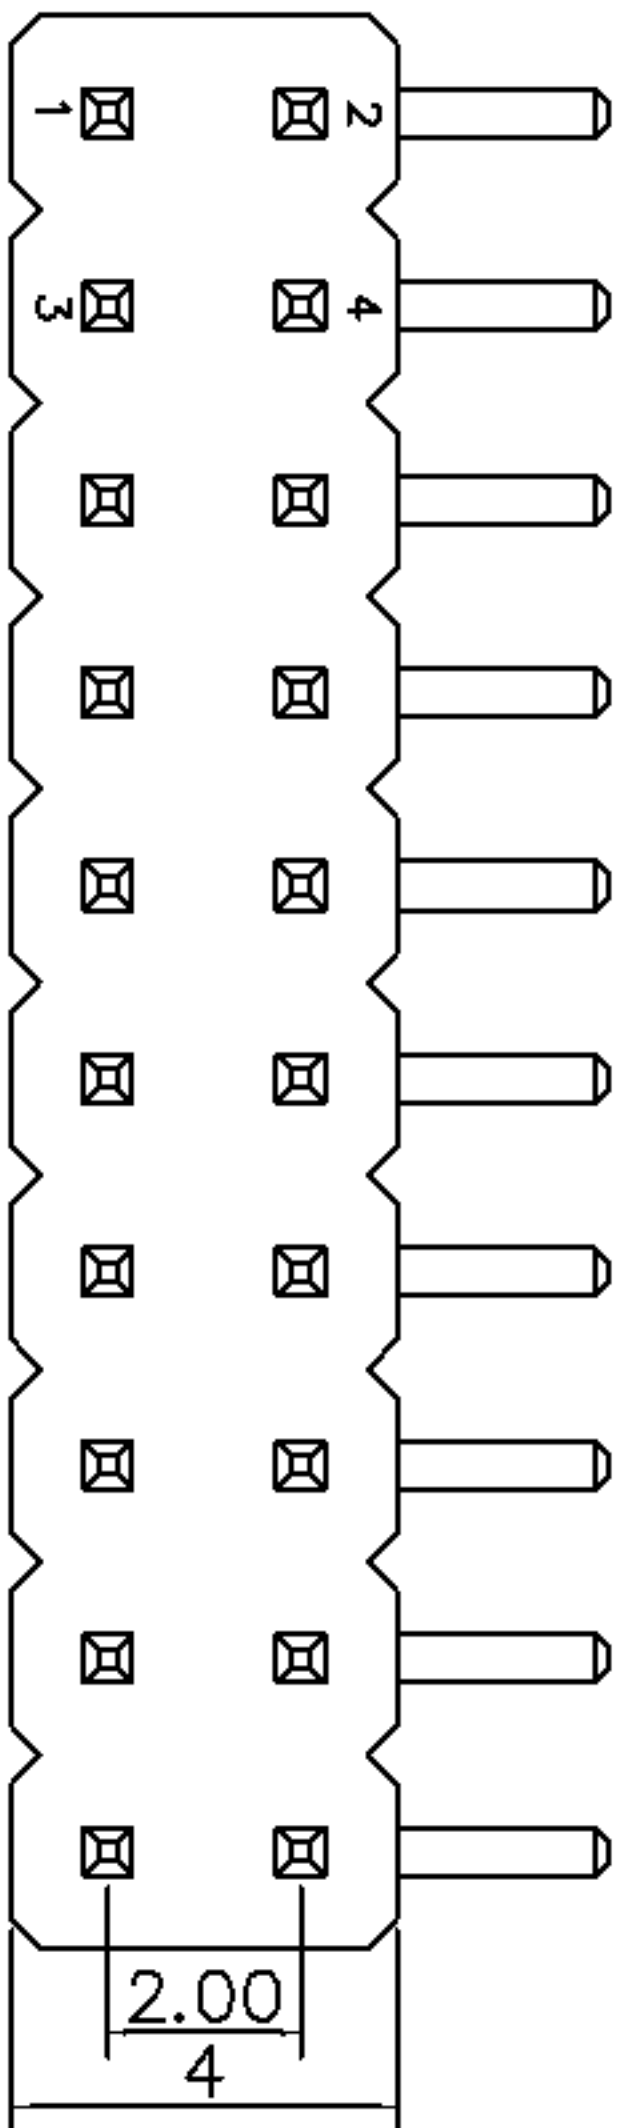


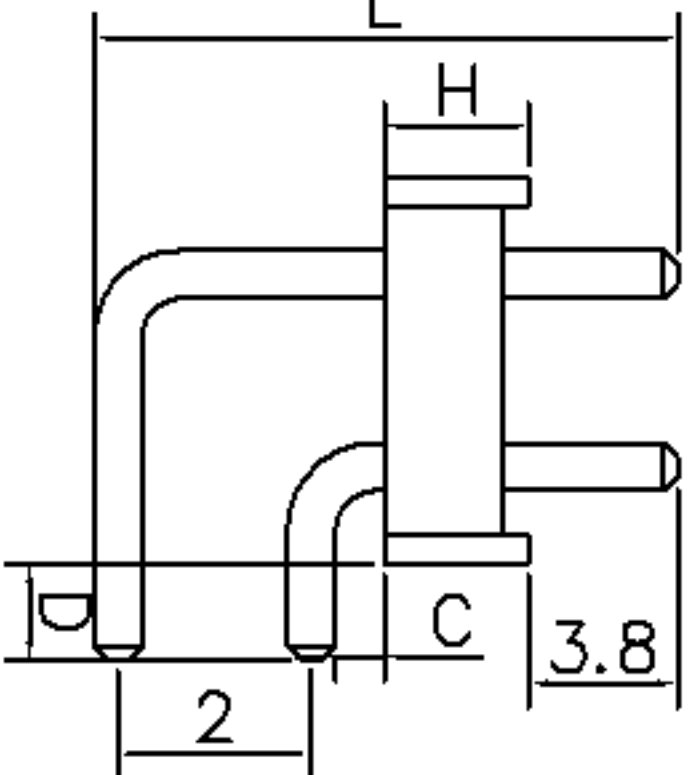

PCB Layout

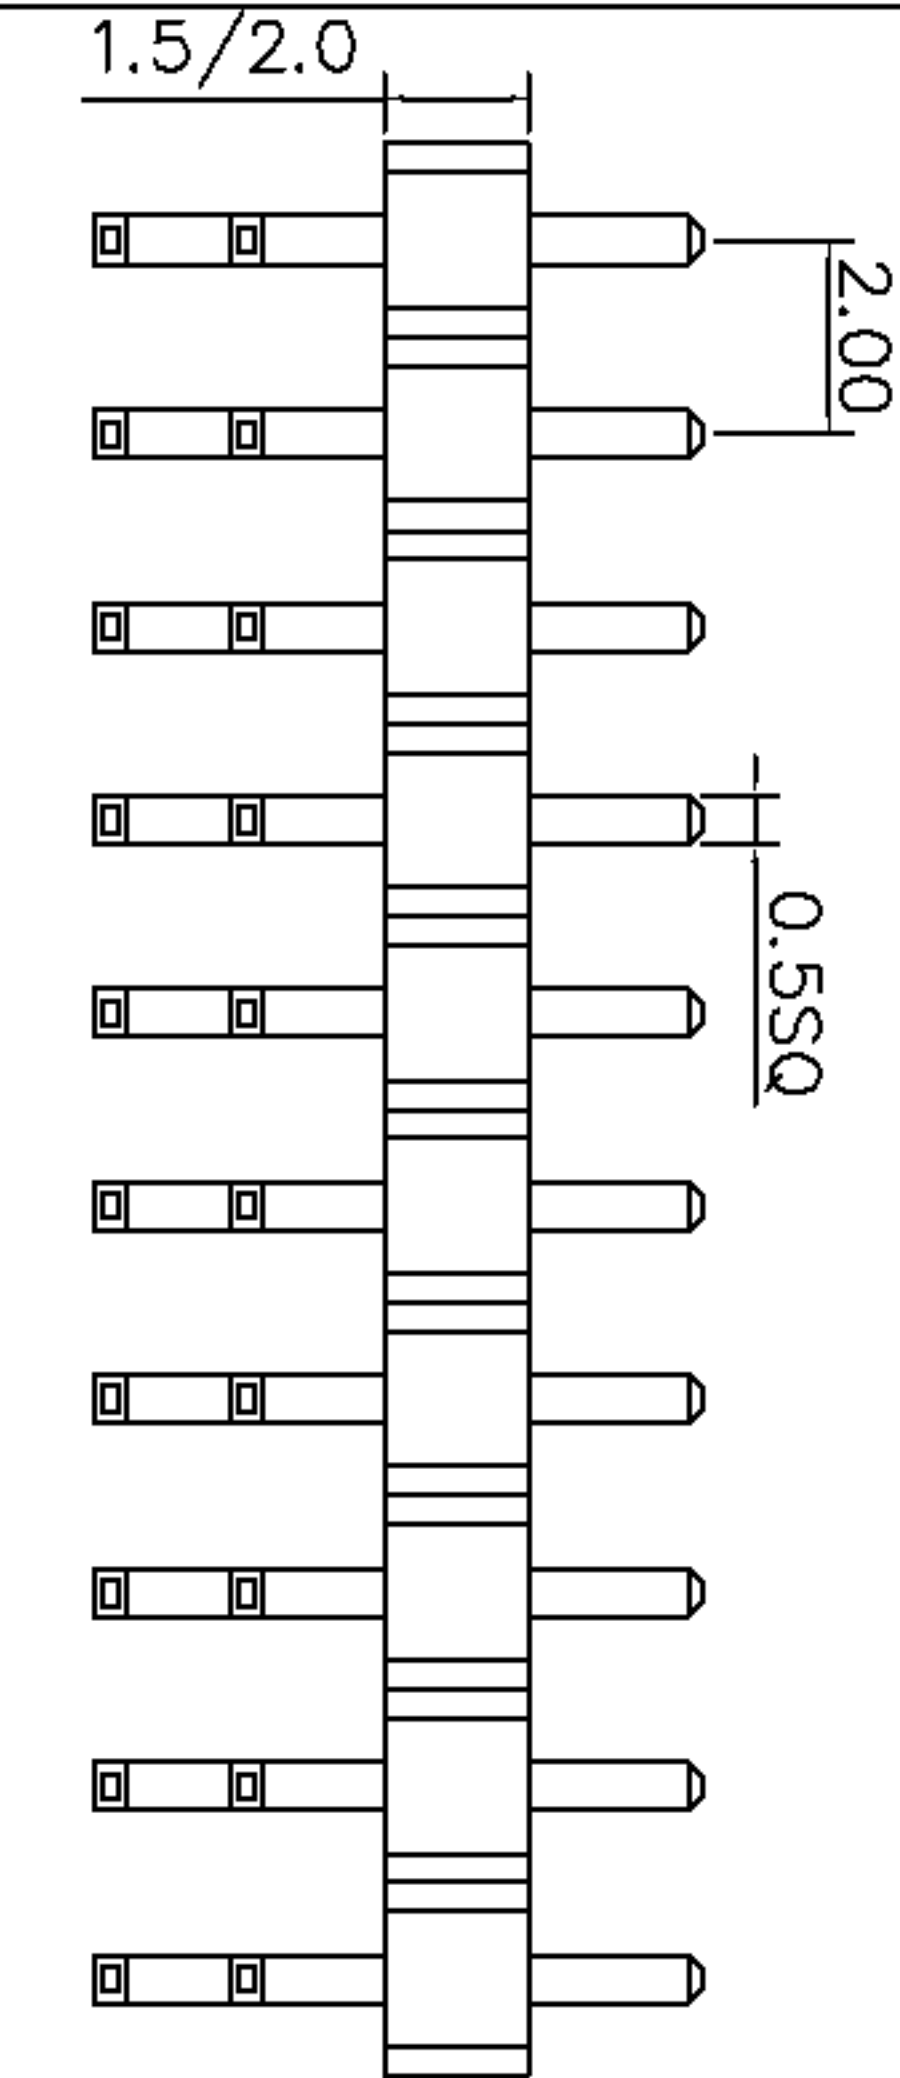

H、L、C、D 的尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material: Brass
Insulator Material: PA66+30%GF
Electrical:
Current rating: 1.5Amps/Contact max.
Contact resistance: $\leq 20\text{mohms/Contact}$
Insulation resistance: $\geq 1000\text{Mohms at } V=100\text{V}$
Withstanding Voltage: 450V AC/Minute
Mechanical:
Operating Temperature: Gold plated: $-55^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Tin plated: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Soldering Temperature: $260^{\circ}\text{C } 10\text{s Max.}$

1101-200R12XX2-H-L

2.0PIN距单塑胶双排
弯式排针系列

总高
塑高
1: 表示反弯, 2: 表示正弯
每排PIN数

TOLERANCE			DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHEN ELECTRONIC CO., LTD
TOL		ANGLE	YSH	2012.05.23	
ON			CHECKED	DATE	
.XXX ±	0.05		CLIENT APPROVED	DATE	TITLE: 排针系列-2.00 PIN距-双排-单塑胶 正弯针
.XX ±	0.15	1°			RFQ NO
.X ±	0.20	2°			CLIENT P/N
X. ±	0.30				UNIT: mm
					SCALE: free
					FILE NO.: YH20120602A013