



	A	新版图	/	2012.05.23
				L2M

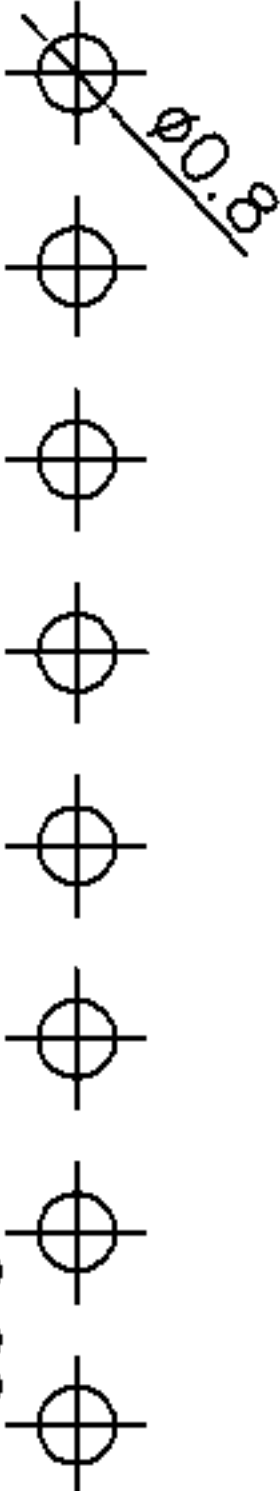

PCB Layout

Technical Data:

Material:
Contact Material:Brass
Insulator Material:PA66+30%GF
Electrical:
Current rating:1.5Amps/Contact max.
Contact resistance:<=20mohms/Contact
Insulation resistance:>=1000Mohms at V=100V
Withstanding Voltage:450V AC/Minute
Mechanical:
Operating Temperature:Gold plated :-55° C~105° C
Tin plated :-40° C~105° C
Soldering Temperature:260° C 10s Max.

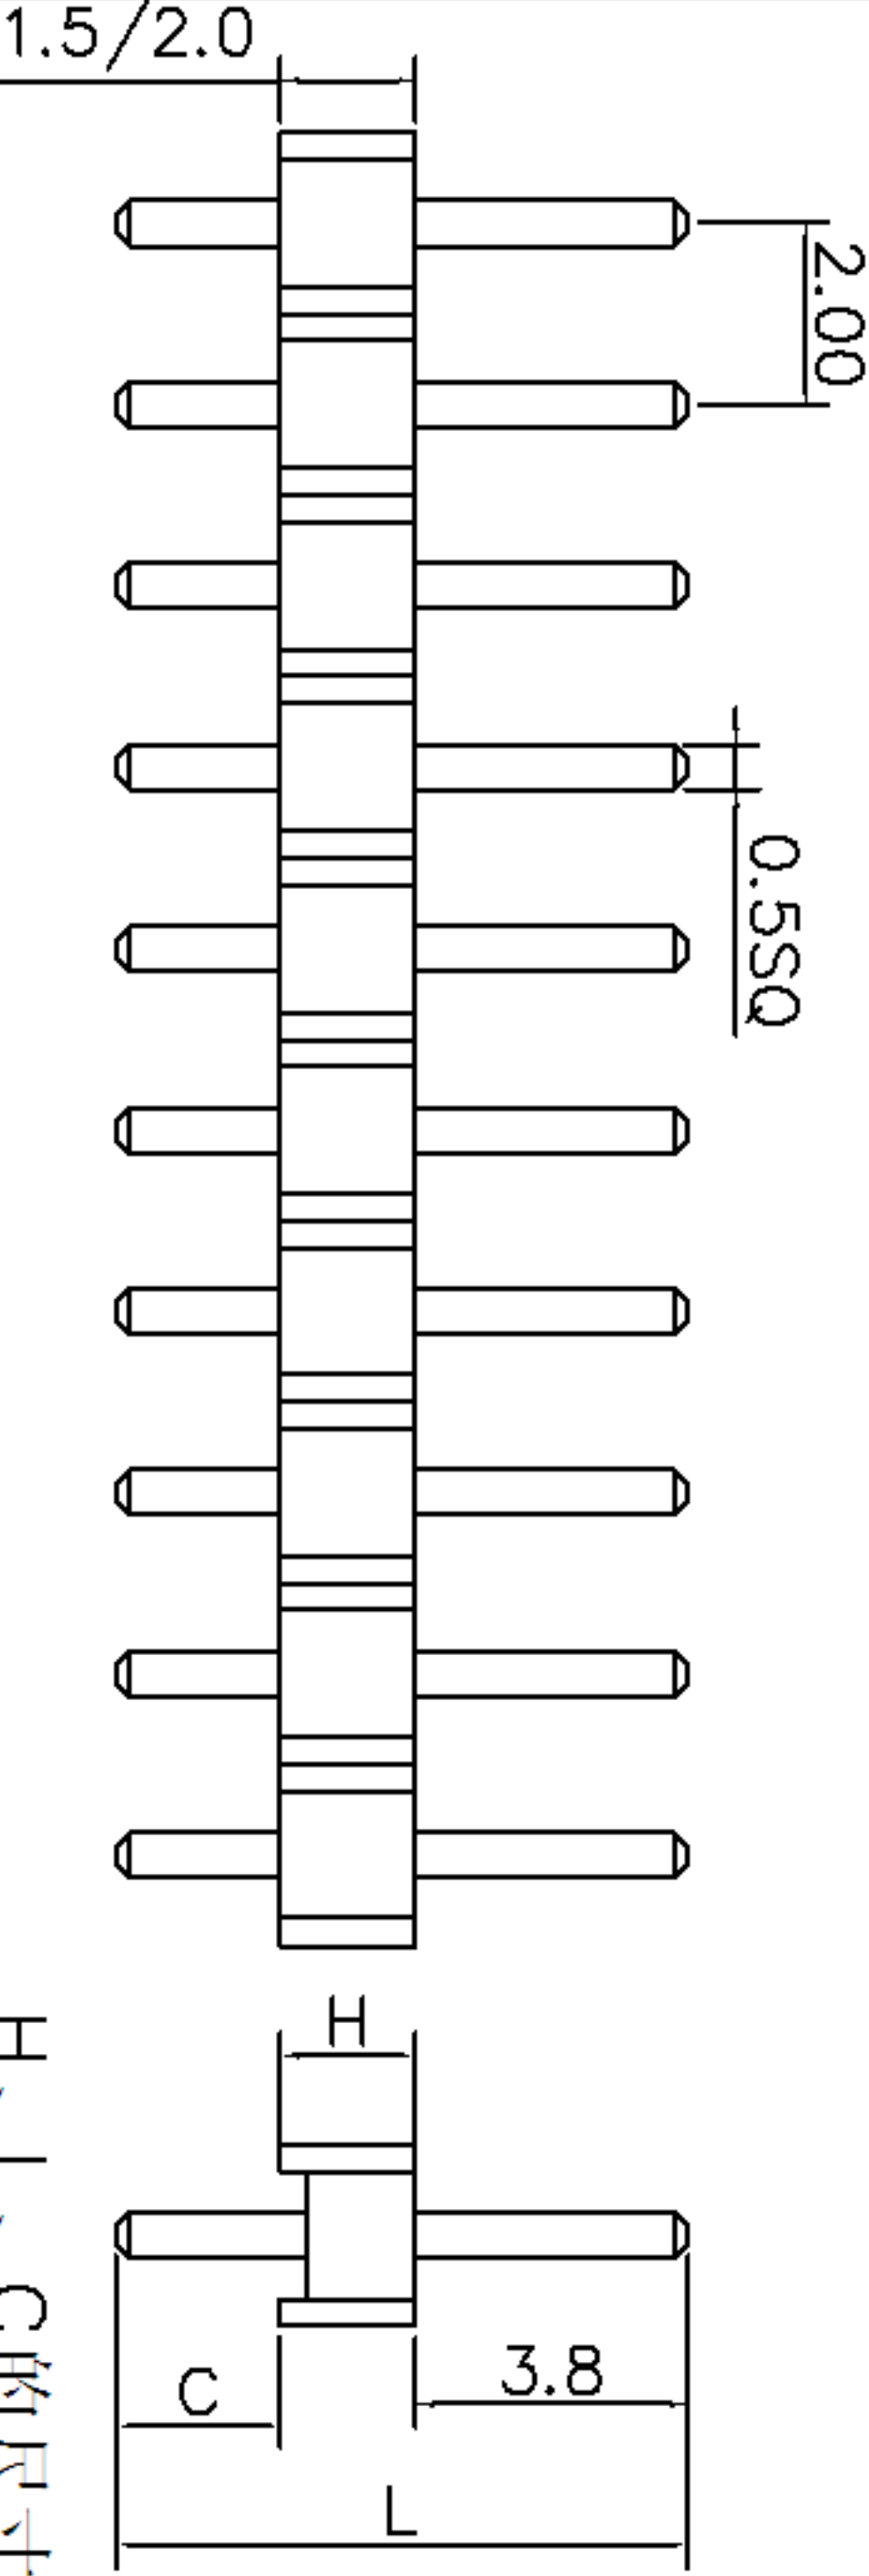

1101-200S11XX-H-L
2.0PIN距单塑胶单排
直式排针系列
塑高
总高
每排PIN数

TOLERANCE			DRAWN	DATE		武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO.,LTD	
TOL		ANGLE	YSH	2012. 05. 23			
ON			CHECKED	DATE	TITLE:		
.XXX±	0.05				排针系列-2.00 PIN距-单排-单塑胶		
.XX ⊥	0.15	1°					
.X ±	0.20	2°	CLIENT APPROVED	DATE			
X. ±	0.30				REQ NO		
					CLIENT P/N	1101-200S11XX-XX-XX	
					UNIT : mm	SCALE: free	
							
					FILE NO.: YH20120602A001		