

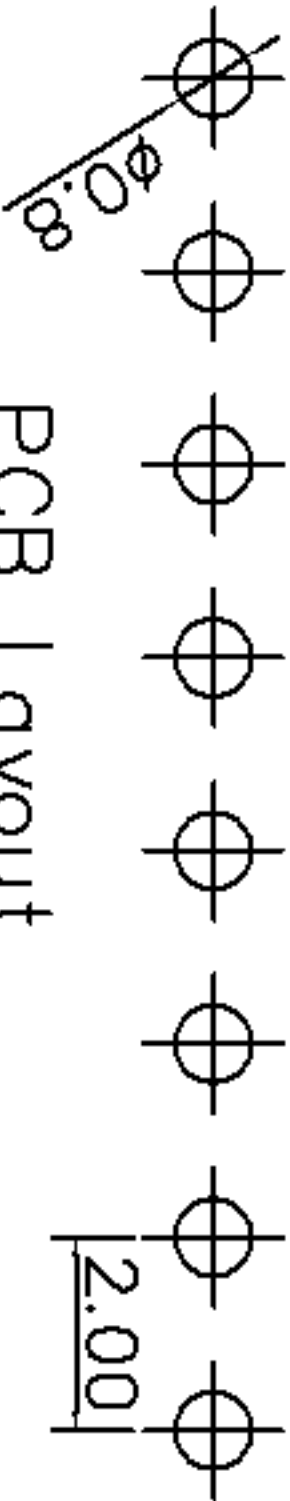


|  |   |     |   |            |
|--|---|-----|---|------------|
|  |   |     |   |            |
|  | A | 新版图 | / | 2012.05.23 |
|  |   |     |   | L2M        |

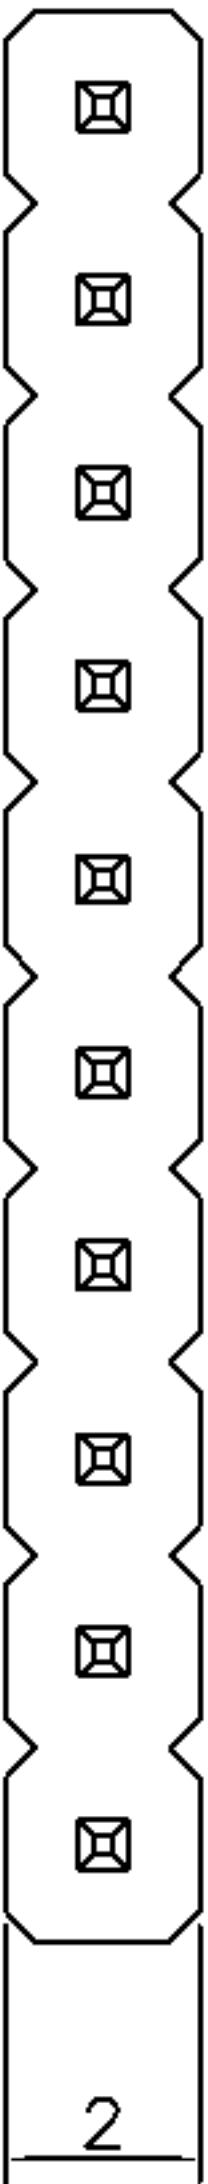

PCB Layout

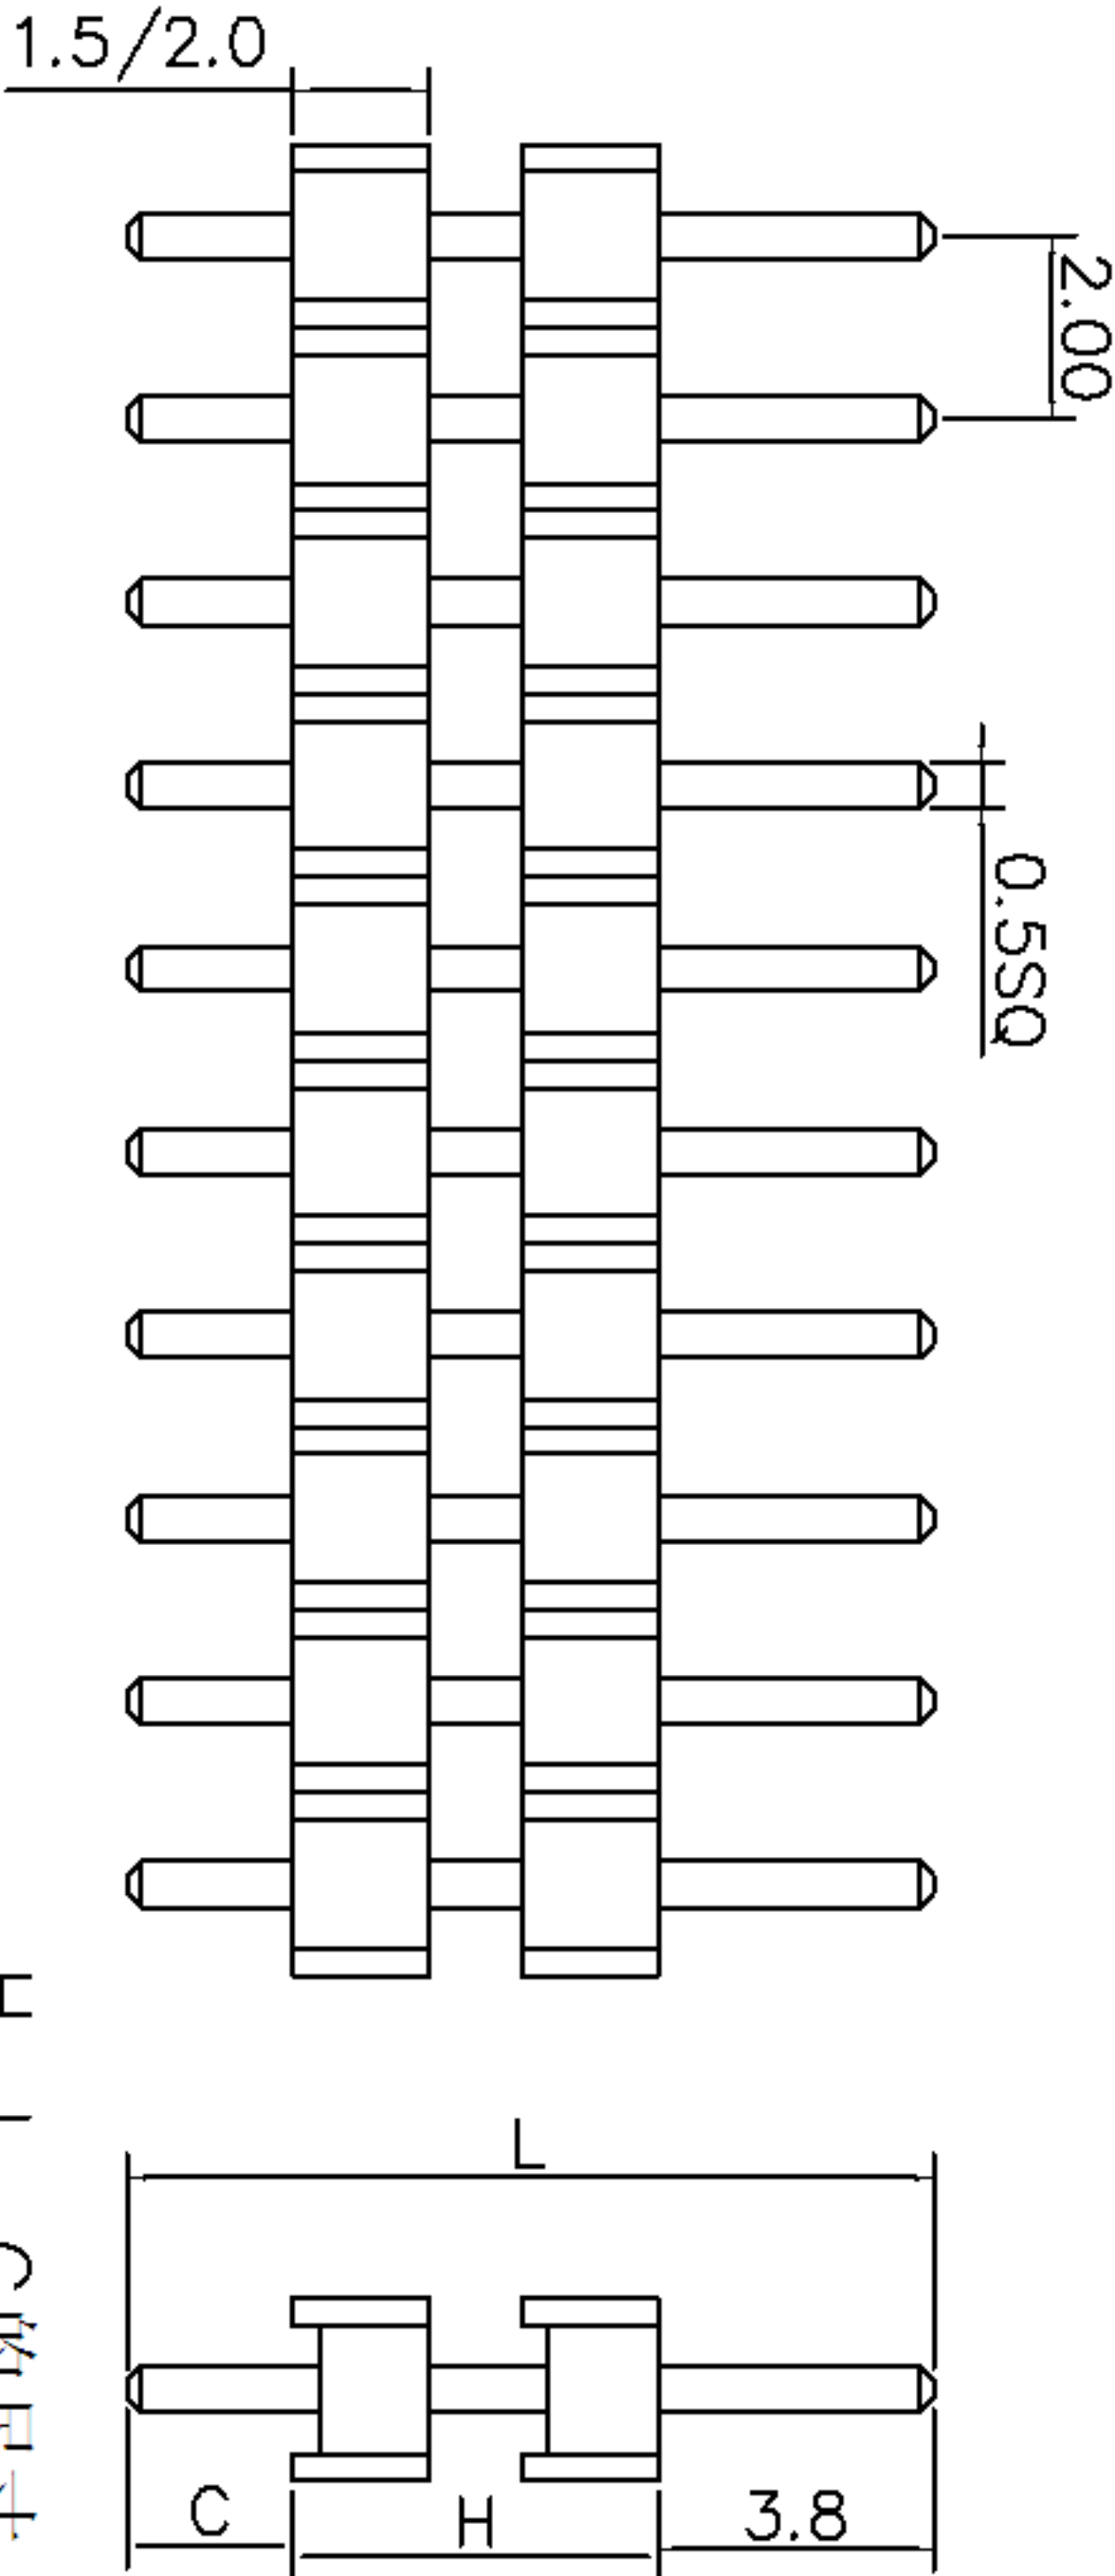

H、L、C的尺寸  
可依客户要求订制

Technical Data:  
Material:  
Contact Material:Brass  
Insulator Material:PA66+30%GF  
Electrical:  
Current rating:1.5Amps/Contact max.  
Contact resistance:<=20mohms/Contact  
Insulation resistance:>=1000Mohms at V=100V  
Withstanding Voltage:450V AC/Minute  
Mechanical:  
Operating Temperature:Gold plated :-55° C~105° C  
Tin plated :-40° C~105° C  
Soldering Temperature:260° C 10s Max.

1101-200S21XX-H-L  
2.0PIN距双塑胶单排  
直式排针系列

每排PIN数

塑高

总高

| TOLERANCE |      |       | DRAWN | DATE       | CHECKED | DATE | TITLE:                |
|-----------|------|-------|-------|------------|---------|------|-----------------------|
| TOL       | ON   | ANGLE |       |            |         |      |                       |
| .XXX±     | 0.05 |       | YSH   | 2012.05.23 |         |      | 排针系列-2.00 PIN距-单排-双塑胶 |
| .XX±      | 0.15 | 1°    |       |            |         |      |                       |
| .X±       | 0.20 | 2°    |       |            |         |      |                       |
| X.±       | 0.30 |       |       |            |         |      |                       |



武汉宇恒电子有限公司  
WUHAN YUHEN ELECTRONIC CO., LTD

|                          |             |
|--------------------------|-------------|
| RFQ NO                   |             |
| CLIENT P/N               |             |
| UNIT: mm                 | SCALE: free |
| FILE NO.: YH20120602A002 |             |