

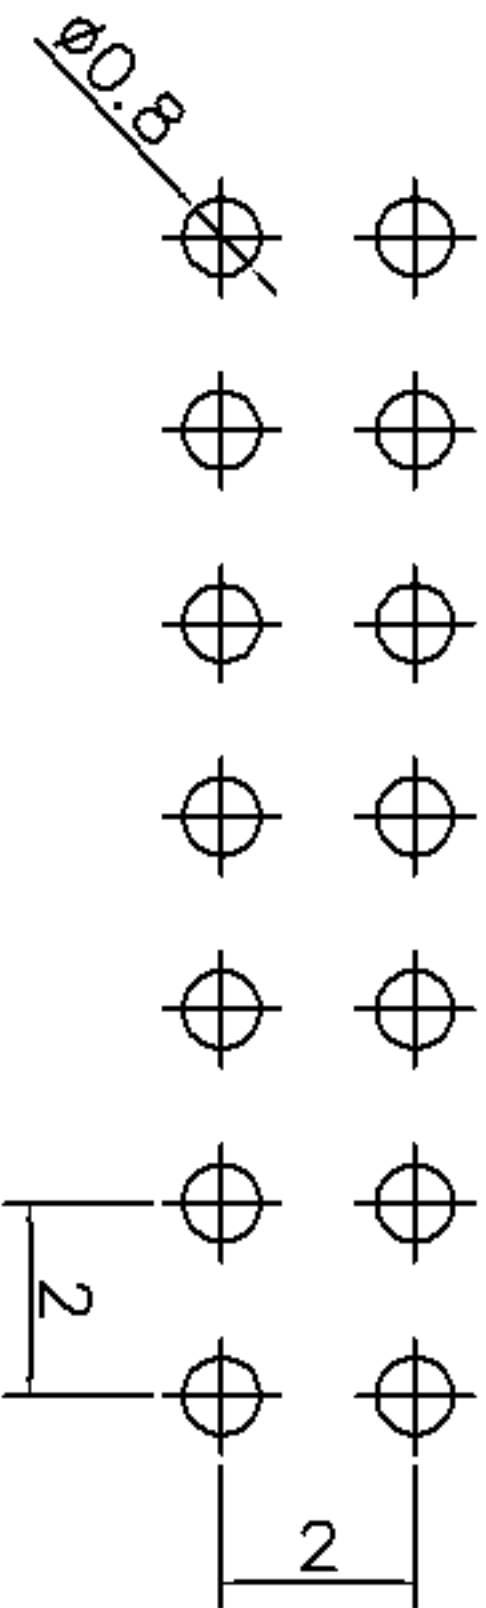


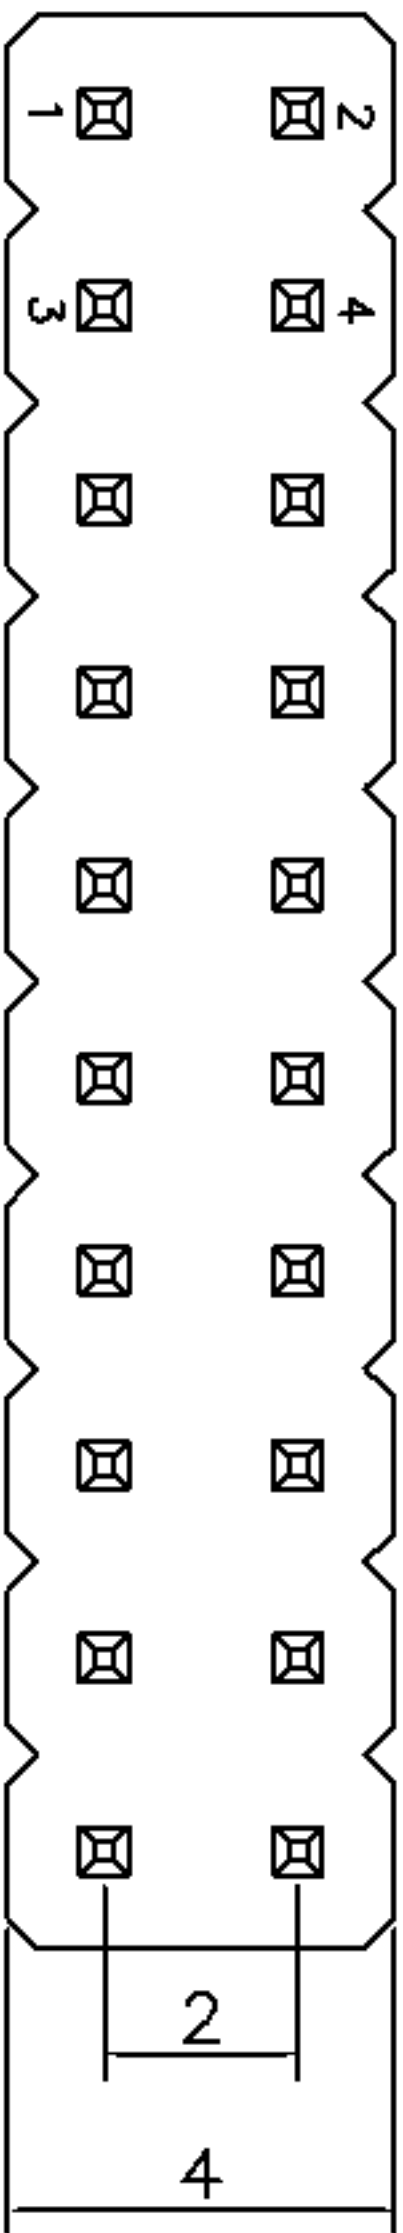

PCB Layout

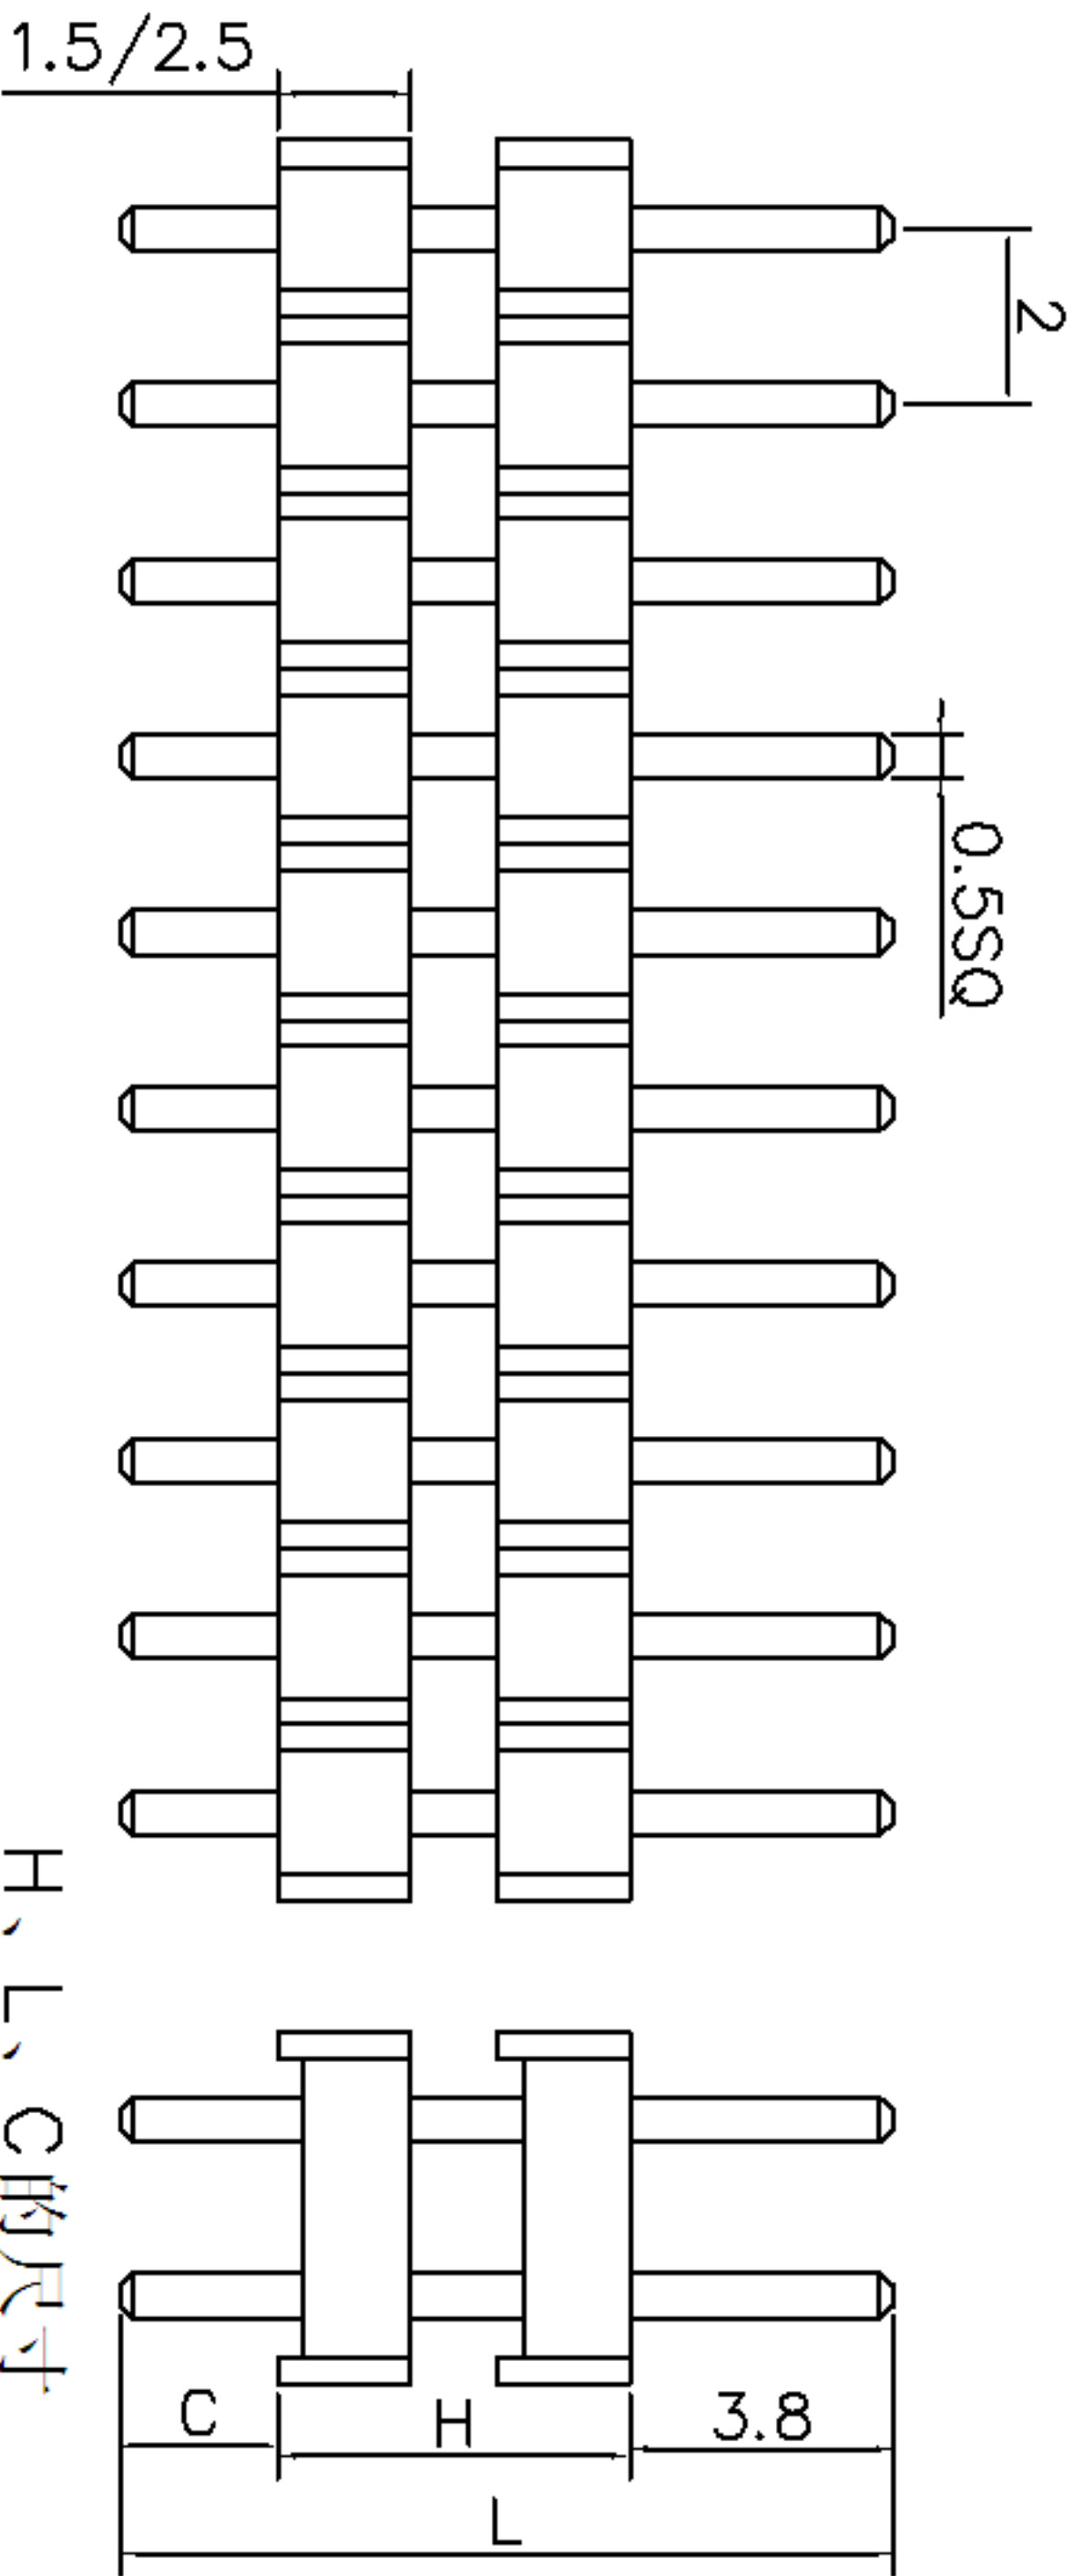

H、L、C的尺寸
可依客户要求订做

Technical Data:
Material:
Contact Material:Brass
Insulator Material:PA66+30%GF
Electrical:
Current rating:1.5Amps/Contact max.
Contact resistance:<=20mohms/Contact
Insulation resistance:>=1000Mohms at V=100V
Withstanding Voltage:450V AC/Minute
Mechanical:
Operating Temperature:Gold plated :-55° C~105° C
Tin plated :-40° C~105° C
Soldering Temperature:260° C 10s Max.

1101-200S22XX-H-L
2.0PIN距双塑胶双排
直插排针系列
每排PIN数
塑高
总高

TOLERANCE			DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD		
TOL		ANGLE	YSH	2012. 05. 23			
ON			CHECKED	DATE	TITLE:		
.XXX±	0.05				排针系列-2.00 PIN距-双排-双塑胶		
.XX±	0.15	1°			RFQ NO		
.X±	0.20	2°	CLIENT APPROVED		DATE	CLIENT P/N	
X.±	0.30				UNIT: mm	SCALE: free	
					FILE NO.: YH20120602A015		