

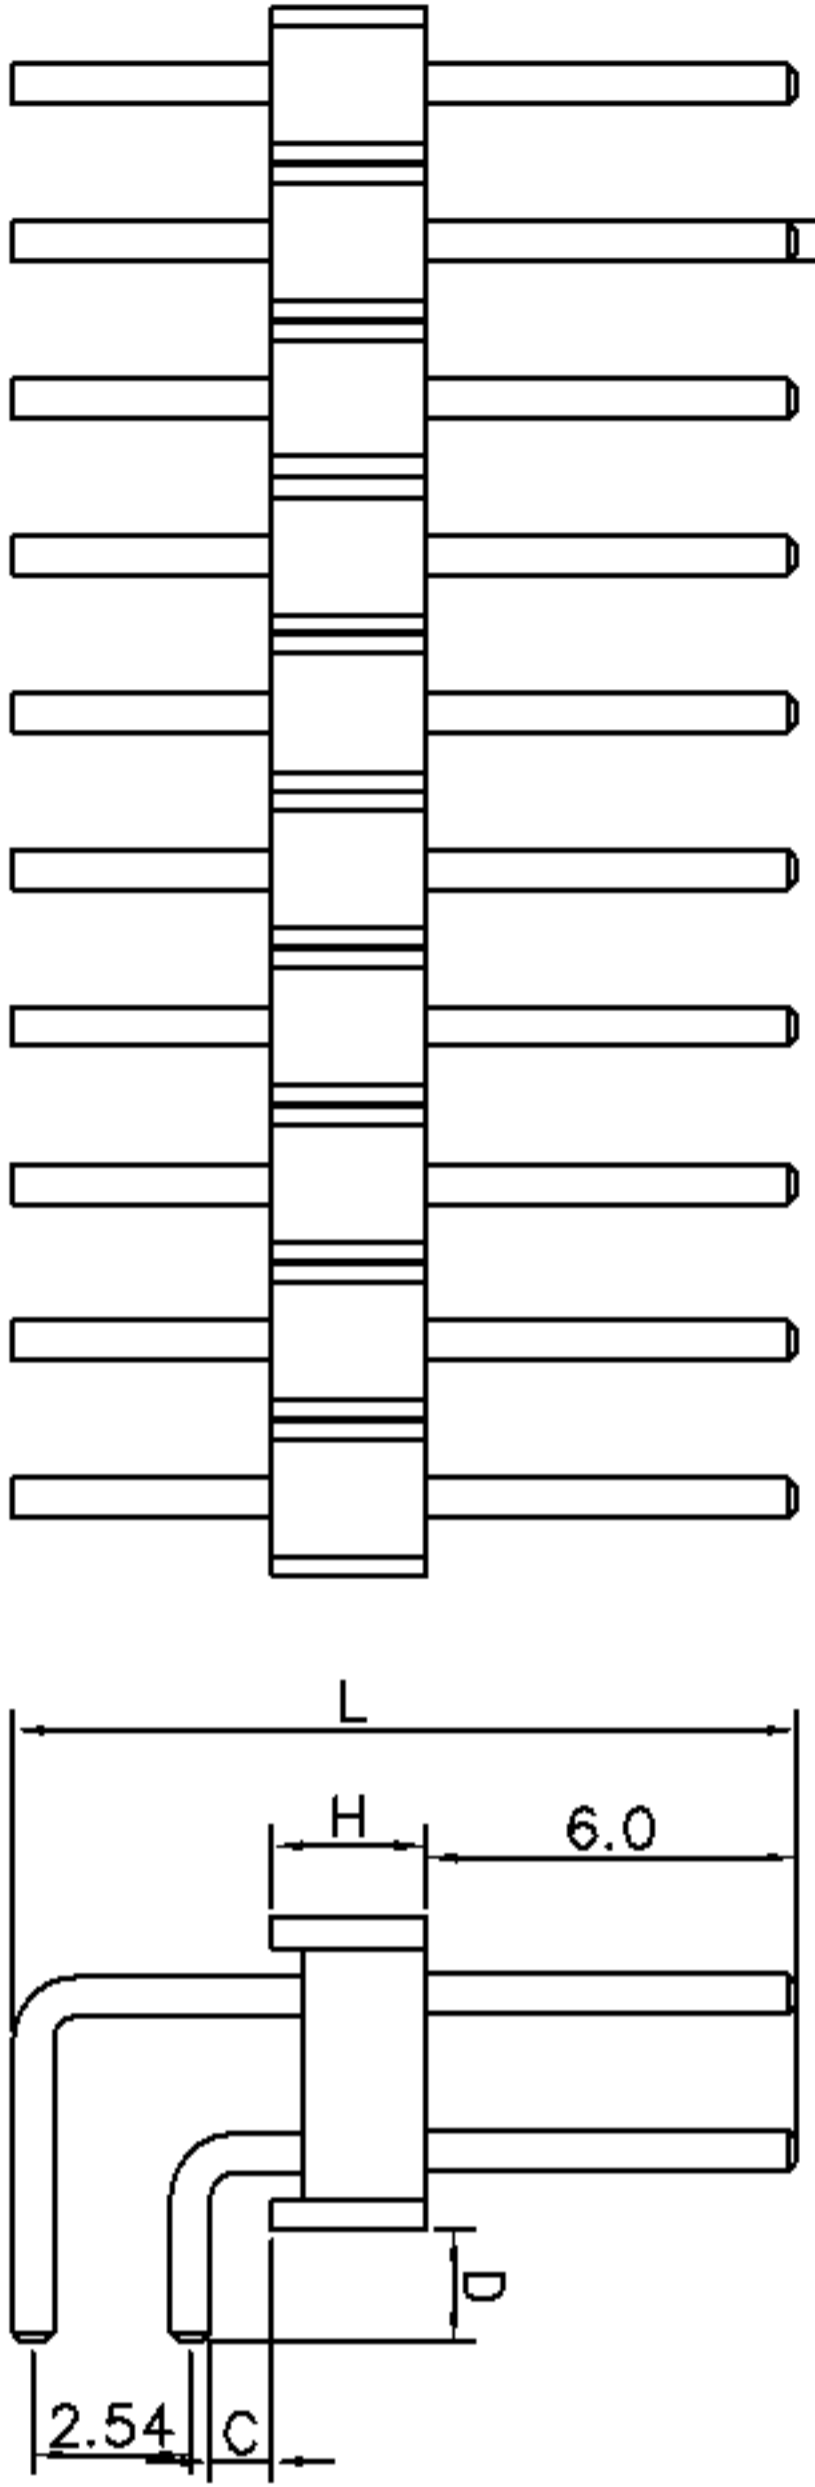


	A			
		新版图		
		/		2012.05.23

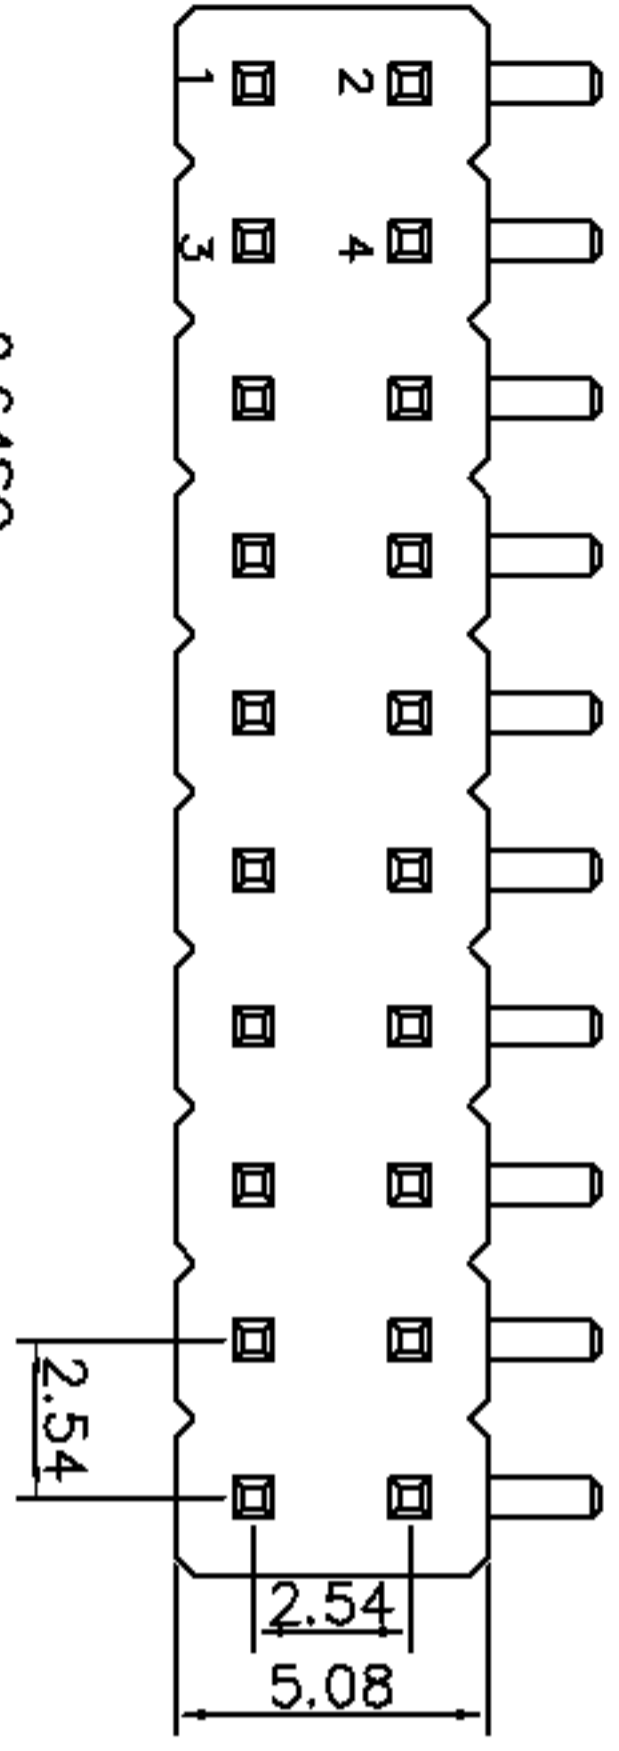

H、L、C、D的尺寸
可依客户要求订做

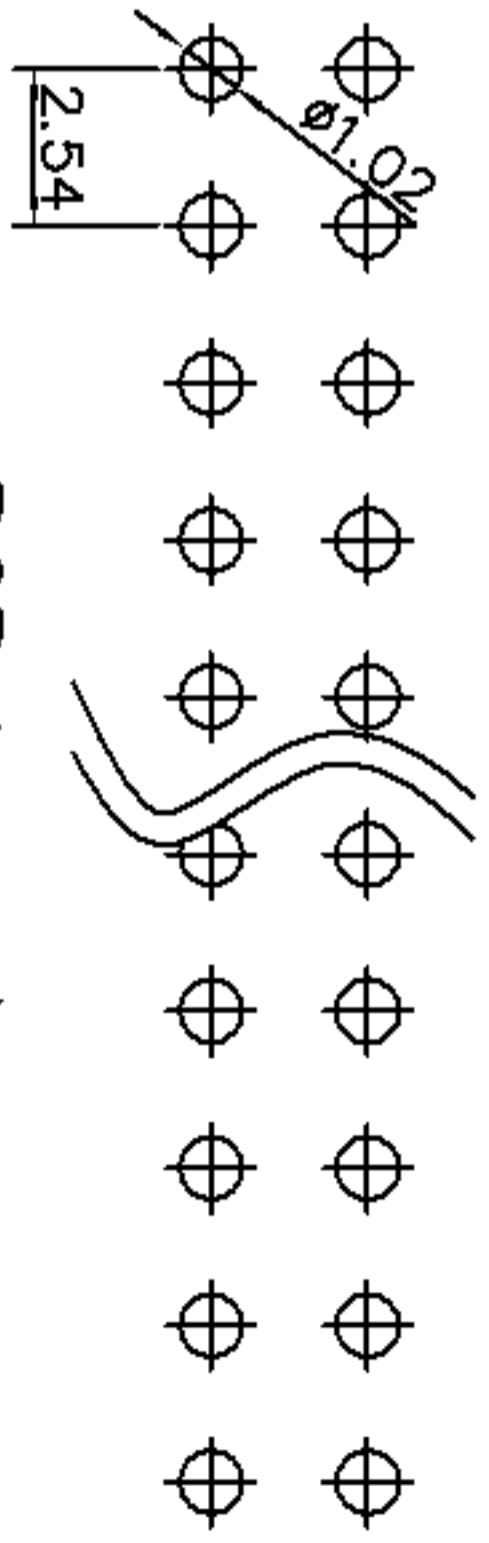


PCB Layout

Technical Data:

Material: Brass
 Contact Material: Brass
 Insulator Material: PBT+30%GF
 Electrical:
 Current rating: 3Amps/Contact max.
 Contact resistance: <=20mohms/Contact
 Insulation resistance: >=1000Mohms at V=100V
 Withstanding Voltage: 550V AC/Minute
 Mechanical:
 Operating Temperature: Gold plated :-55° C~105° C
 Tin plated :-40° C~105° C
 Soldering Temperature: 260° C 10s Max.

1101-254R12XX1 -H -L
 2.54PIN距单塑胶双排弯式排针系列
 1:表示反弯, 2表示正弯
 每排PIN数
 塑高
 总高

TOLERANCE		ANGLE	
TOL	ON	ANGLE	
.XXX =	0.05		
XX =	0.15	1°	
X -	0.20	2°	
X. =	0.30		

DRAWN	DATE	 武汉宇恒电子有限公司 WUHAN YUHENG ELECTRONIC CO., LTD
YSH	2012.05.23	
CHECKED	DATE	TITLE:
CLIENT APPROVED	DATE	排针系列-2.54 PIN距-双排-单塑胶反弯
RFQ NO		
CLIENT P/N	1101-254R12XX2-XX	
UNIT:	SCALE: free	
FILE NO.:	YH20120529A007	