

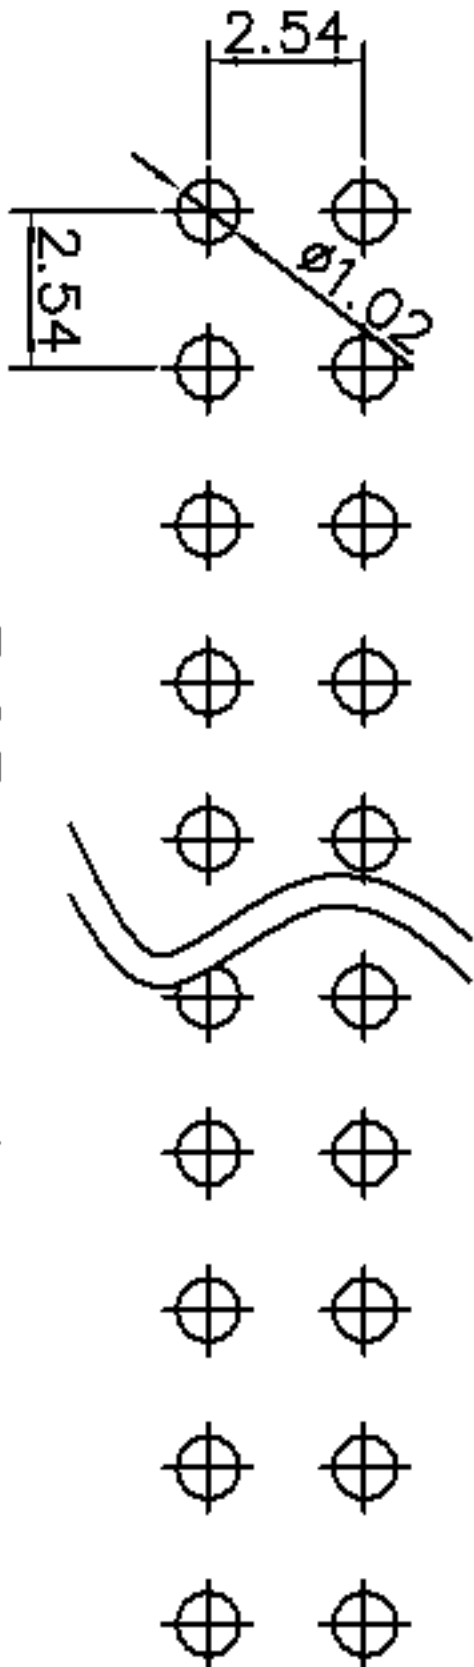


	A	新版图	/	2012.05.23

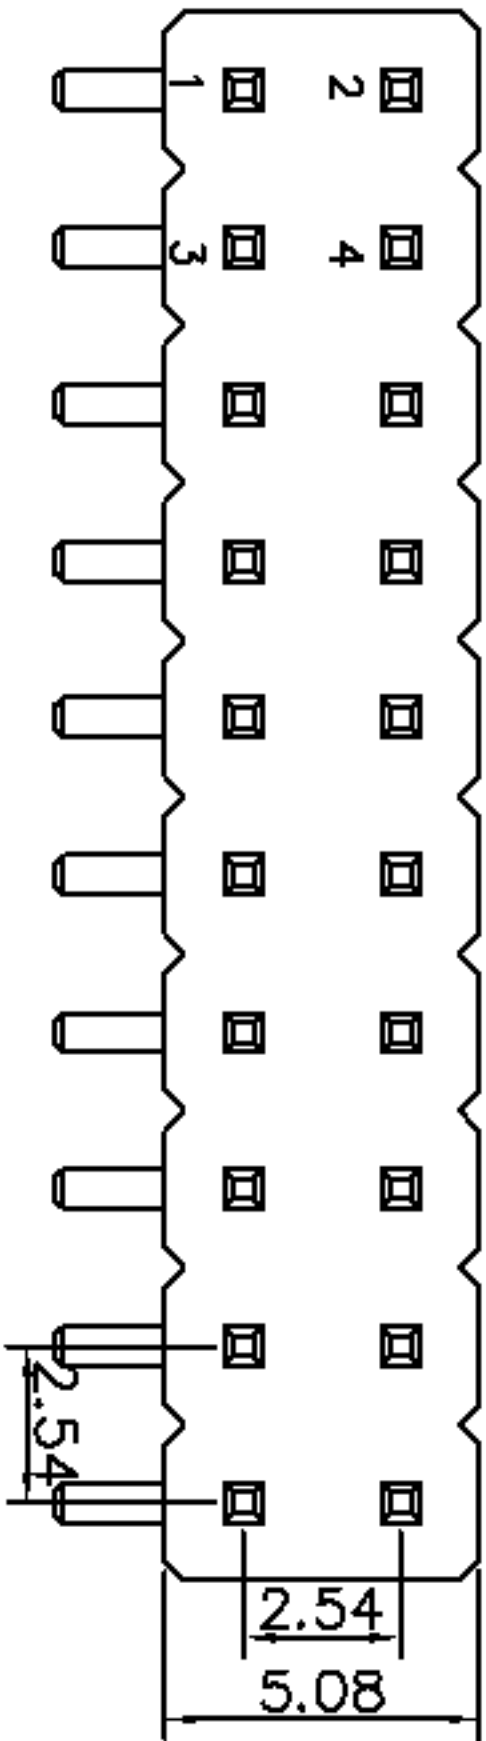

PCB Layout

0.64SQ

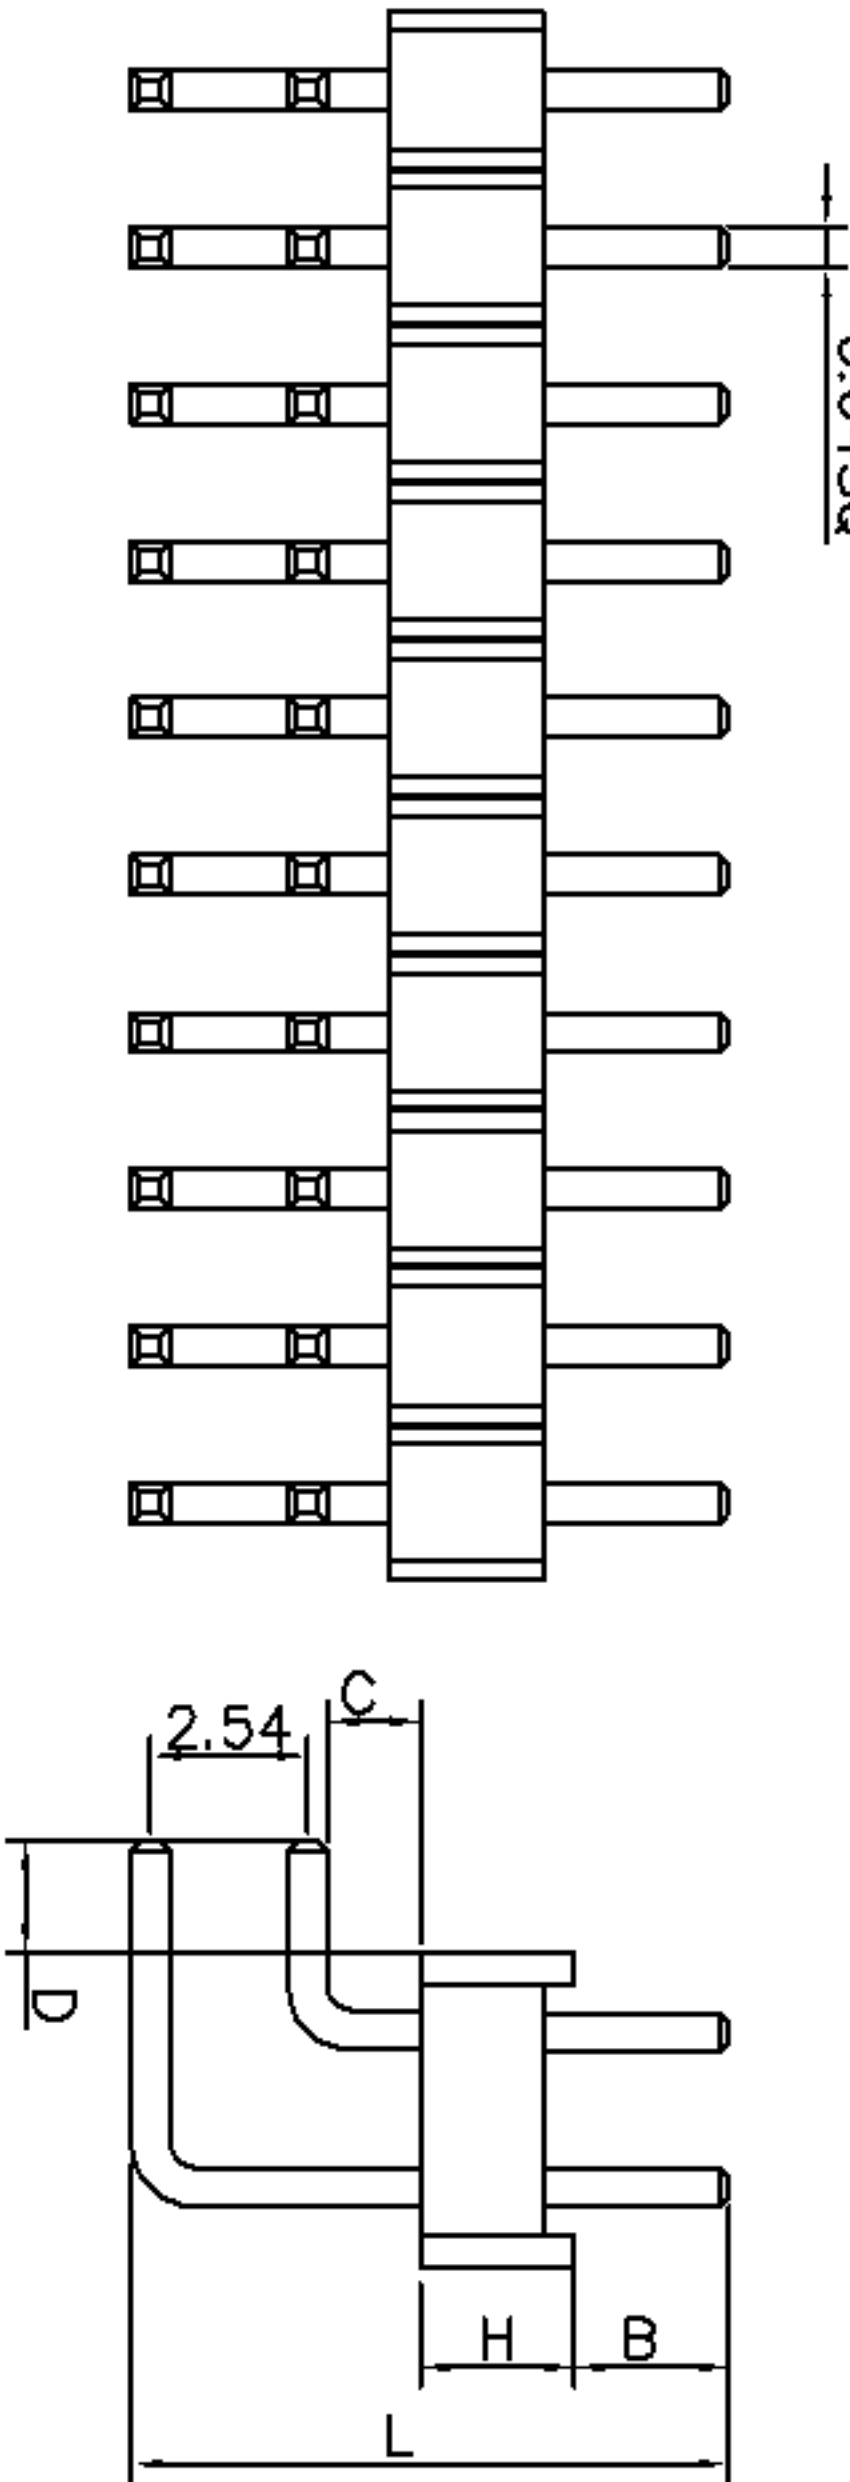

Technical Data:

Material:

Contact Material:Brass

Insulator Material:PBT+30%GF

Electrical:

Current rating:3Amps/Contact max.

Contact resistance:<=20mohms/Contact

Insulation resistance:>=1000Mohms at V=100V

Withstanding Voltage:50V AC/Minute

Mechanical:

Operating Temperature:Gold plated :-55°C~105°C

Tin plated :-40° C~105°C

Soldering Temperature:260° C 10s Max.

H、L、B、C、D的尺寸
可依客户要求订做

1101-254R12XX2-H-L

2.54PIN距单塑胶双
排弯式排针系列

塑高

总高

1:表示反弯, 2: 表示正弯

每排PIN数

			DRAWN		DATE	
			YSH		2012. 05. 23	
TOLERANCE			CHECKED		DATE	
TOL ON				ANGLE		
.XXX =			0.05			
.XX =			0.15		1°	
.X -			0.20		2°	
X. =			0.30			
			CLIENT APPROVED		DATE	
RFQ NO						
CLIENT P/N			1101-254R12XX1-XX			
UNIT : mm			SCALE: free			
FILE NO. : YH20120529A006						
TITLE: 排针系列-2. 54 PIN距-双排-单塑胶 正弯						
 武汉宇恒电子有限公司 WUHAN YUHEN ELECTRONIC CO., LTD						