
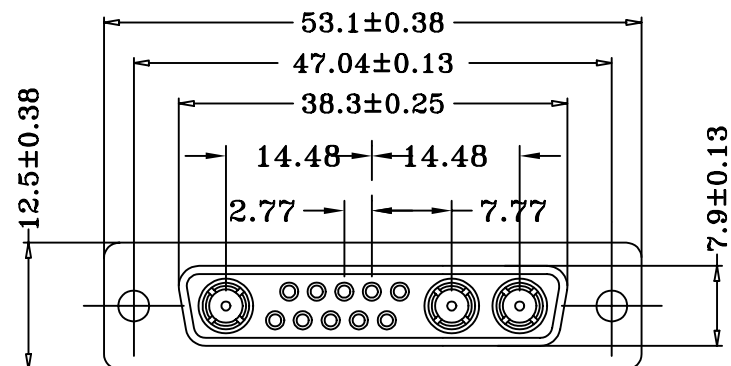
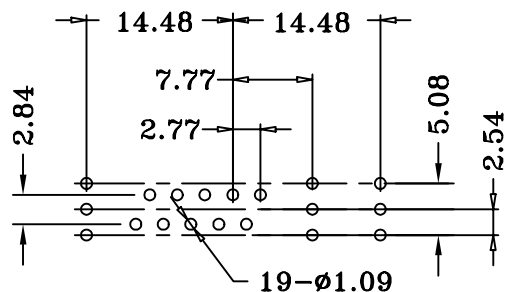


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
 COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR
 SIGNAL CONTACT MATERIAL: BRASS, FULL GOLD FLASH
 COAXIAL CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 3.0 AMPS
 SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C
 COAXIAL CONTACT IMPEDANCE: 75 OHMS

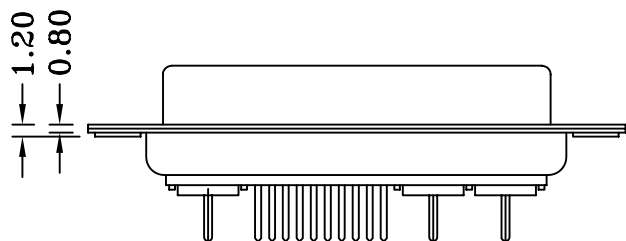

PCB LAYOUT

Series No

Contact Arrangement

051(5W1),022(2W2),033(3W3),055(5W5)
 072(7W2),088(8W8),094(9W4),111(11W1)
 133(13W3),136(13W6),172(17W2),175(17W5)

Contact Type

1: Plug, Brass
 2: Socket, Brass

Contact Plating

15: Signal Contacts Full Gold Flash
 Coaxial Contacts 15U"Gold Plated

1193-133-215-000

Options

00: With 0.120" Diameter Hole
 01: With #4-40 Threaded Rivets
 Clinch Nuts on Back Shell
 02: With #4-40 Threaded Rivets
 Boardlocks(Height=6.0mm)

Options

0: Coaxial Contacts 75 Ohms
 Black Insulator, Tin Shell
 1: Coaxial Contacts 50 Ohms
 Black Insulator, Tin Shell

				Drawn by	Zhenxing Fu	2004.06.24
				Designed by	Zhenxing Fu	2004.06.24
				Approved by	Wangjun	2004.06.24
					TORERANCE	Code:215
A0	Drawing	Zhenxing FU	2004.06.24	Units:mm(inches)	.XX ±0.13	Scale 1:1
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+°-2°

Combo-D, Coxial, Straight

Ver A0 Part No. 1193-133-215-000