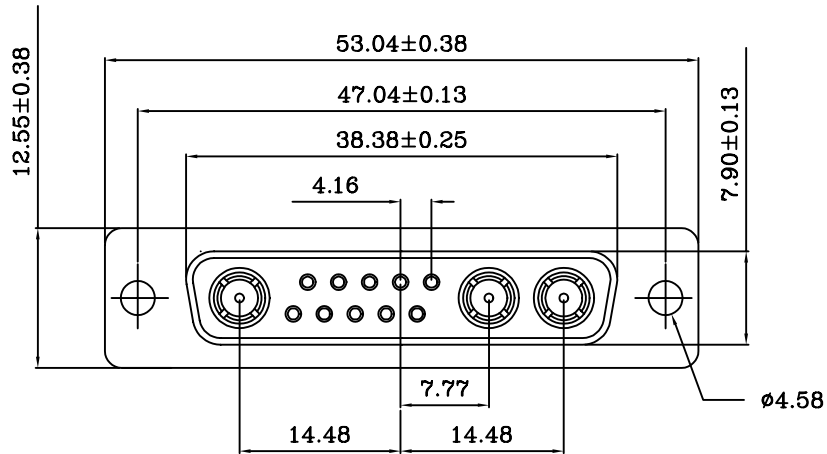


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

DIMPLES ON PLUG ONLY

CONNECTOR INSULATOR : PBT THERMOPLASTIC,

30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR

COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR

COAXIAL CONTACT MATERIAL: BRASS, 15u" GOLD PLATED


ELECTRICAL CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : -55°C ~ +125°C

COAXIAL CONTACT IMPEDANCE: 75 OHMS

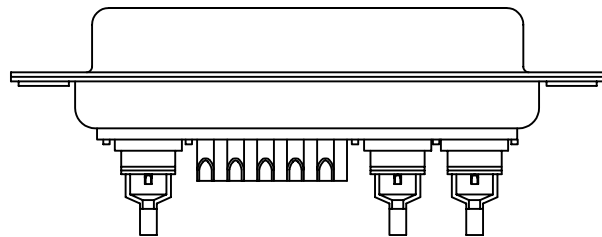

Series No	1195-133-215-X00	Options
No of Contacts	133: 13W3	00: With 0.120" Diameter Hole
Contact Type	2: Socket, Brass	Options
Contact Plating	15: Signal contacts Full Gold Flash Coaxial Contacts 15u" Gold plated	0: Coaxial Contacts 75 Ohm, Black Insulator, Tin Shell
		1: Coaxial Contacts 50 Ohm, Black Insulator, Tin Shell

				Drawn by	Zhenxing Fu	2004.06.24	Combo-D, Coaxial, Solder	
				Designed by	Zhenxing Fu	2004.06.24		
				Approved by	Wangjun	2004.06.24		
					TORERANCE	Code:215		
A0	Drawing	Zhenxing FU	2004.06.24	Units:mm(inches)	.XX ±0.13	Scale 1:1		
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		Angles+/-2°	Ver A0	Part No. 1195-133-215-X00