
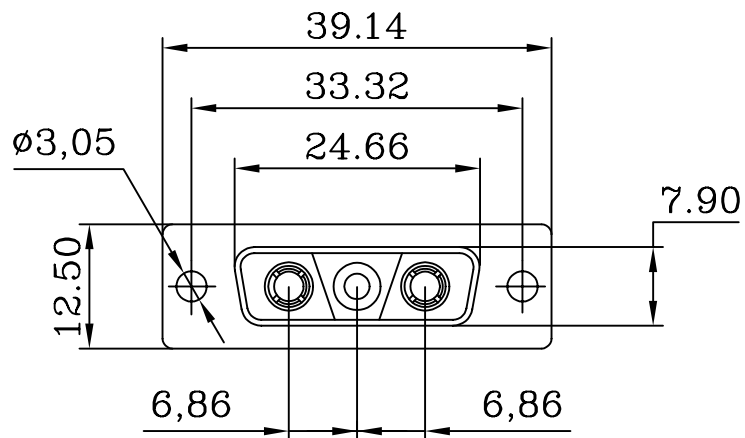


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
 CONNECTOR INSULATOR : PBT THERMOPLASTIC,
 30% GLASS FILLED, UL 94V-0 RATED, BLACK
 HIGH POWER CONTACT MATERIAL: BRASS, 15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
 HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE :
 1000 V AC FOR 1 MINUTE
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +125°C

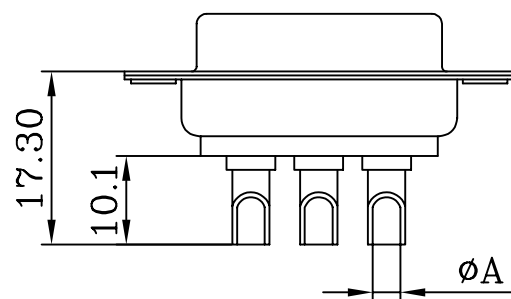

Series No	1198-033-X15-000-V	Options
No of Contacts	033: 3W3	00: With 0.120" Diameter Hole
Contact Type	2: Socket, Brass, 10A(1.7mm) 4: Socket, Brass, 20A(2.8mm) 8: Socket, Brass, 40A(4.60mm)	Options
Contact Plating	15: Signal contacts Full Gold Flash Coaxial Contacts 15u" Gold plated	0: Black Insulator, Tin Shell 1: Green Insulator, Tin Shell 2: White Insulator, Tin Shell

PART NO.	Current Rating	Dimension
		Ø A
1198-033-815-000-V	40 AMPS	Ø4.6
1198-033-415-000-V	20 AMPS	Ø2.8
1198-033-215-000-V	10 AMPS	Ø1.7

				Drawn by	Zhenxing Fu	2004.06.24
				Designed by	Zhenxing Fu	2004.06.24
				Approved by	Wangjun	2004.06.24
A0	Drawing	Zhenxing FU	2004.06.24	Units:mm(inches)	.XX ±0.13	
Ver NO	Revisions	CHK	Rev Date	SHEET 1 OF 1		

TORERANCE	Code:215
Scale 1:1	
Angles+/-2°	

Combo-D, High Power, Solder, 3V3	
Ver A0	Part No. 1198-033-X15-000-V