





REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

- Note:
- 1.Material:
- 1.1 Insulator: P.B.T+30%G.F OR PA6T,UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Brass,t=0.30mm.
- 1.4 Spring:Stainless Steel,t=0.30mm.

- 2.Specification:
- 2.1 Rated voltage and current:1.5A at 250V AC minimum.
- 2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
- 2.3 Contact resistance:Before life test 30m ohm max,
After life tset 50m ohm max.
- 2.4 Insulation resistance:1000M ohm min.
- 2.5 Insertion force:35 Newtons maximum.
- 2.6 Extraction force:10 Newtons minimum.
- 2.7 Solderability:Terminal shall be immersed in flux before text,Then dip
in molten solder for 5±0.5 sec. At 245±5°C.

- 3.Finishes:
- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 Shell: Nickel plated.

4	Grounding Strip	1	Stainless Steel	T=0.30mm	Nickel Plated
3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	8	Brass	T=0.25mm	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

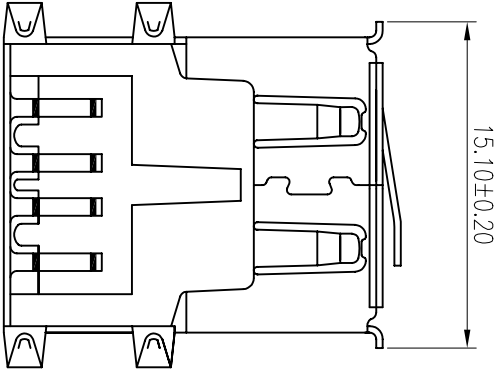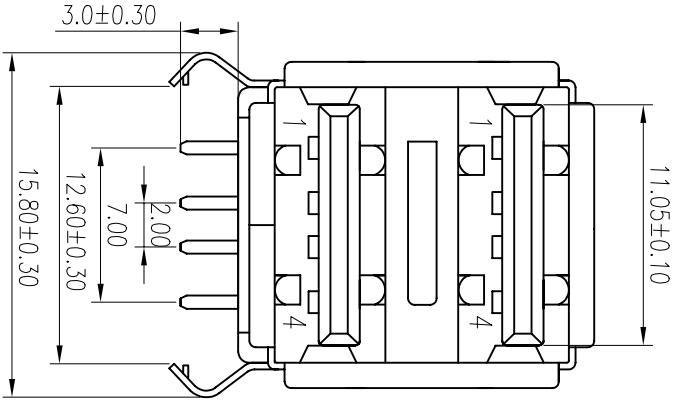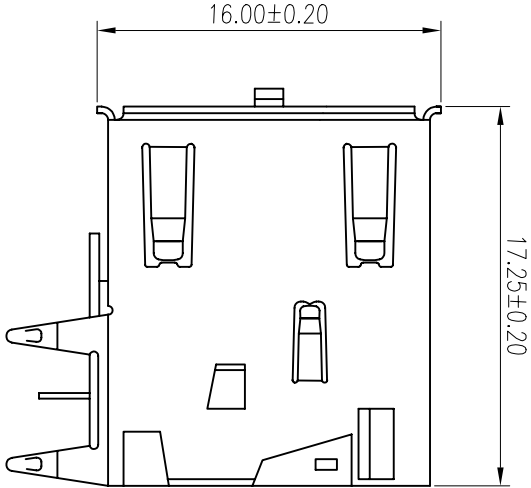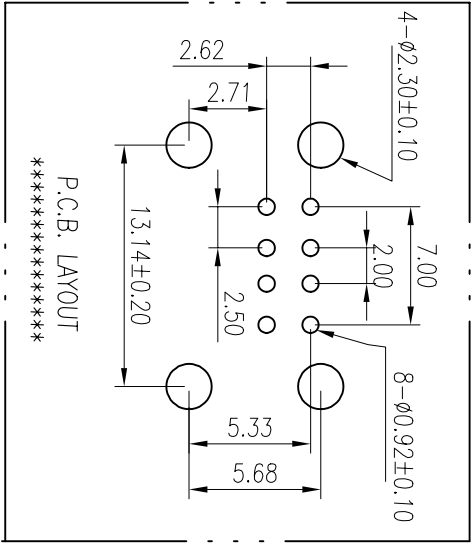

PART NO:		MATERIAL:			
MODEL NO:		FINSH:			
UNIT:	mm	SIZE:	A4	COLOR:	
TOLERANCE UNSPECIFIED		DR:	'06/05/08	PART NAME:	
.x ±0.3		CHK:	'06/05/08	USB-A TYPE P.C.B(F)90°雙層(半包式)彈片式	
.xx ±0.20		AP:	'06/05/08	DWG NO:	S/A-299
.xxx ±0.100		SCALE:	3:1	SHEET:	1 of 1
ANG. ±1°				REV:	A0

