


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mW Max.
4. Insulation resistance: 1000 MW Min at DC 500V.
5. Temperature range: -55°C~+105°C

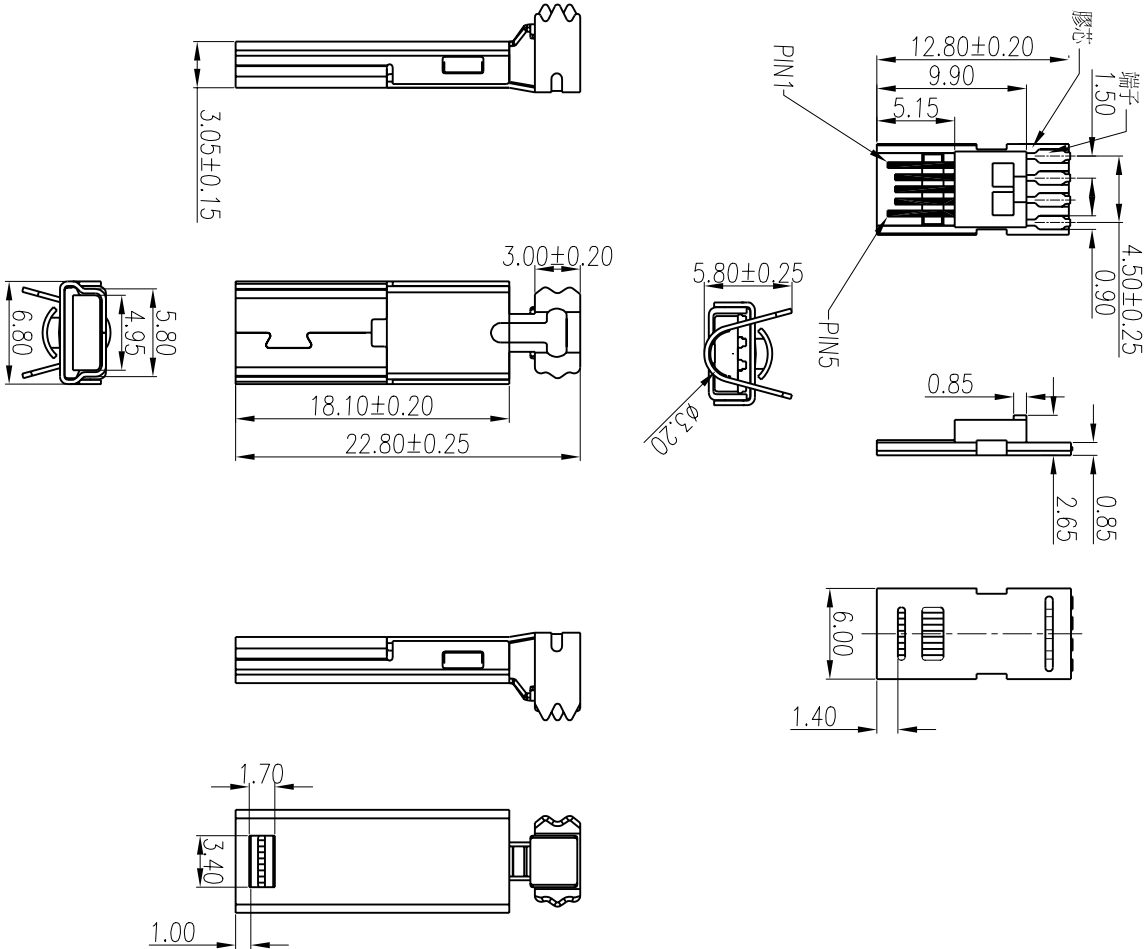

4	Back Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"~120u" Nickel Plated
3	Front Shell	1	Cold rolled steel	T=0.30mm	Cu:40u"min. 80u"~120u" Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min Solder area:80~120u"Tin Plated over 40u"Nickel Min.
1	Housing	1	PBT	UL 94-V0	Black
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

PRAT NO:			MATERIAL:		
MODEL NO:			FINSH:		
UNIT: mm	SAZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED			MINI USB-5PIN(M) B TYPE焊線式超薄(五出四PIN)		
X	±0.30	DR: 吳曉亮 06/12/08	DWG NO:	S/A-331-02	REV. A0
XX	±0.20	CHK: Kevin 06/12/08	SCALE:	1:1	SHEET: 1of1
XXX	±0.10	APP: Kent 06/12/08			
ANG	±1°				