


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
A1		▲	依實物修改	2005/08/23	常各	

COVER TAPE 0.06mm

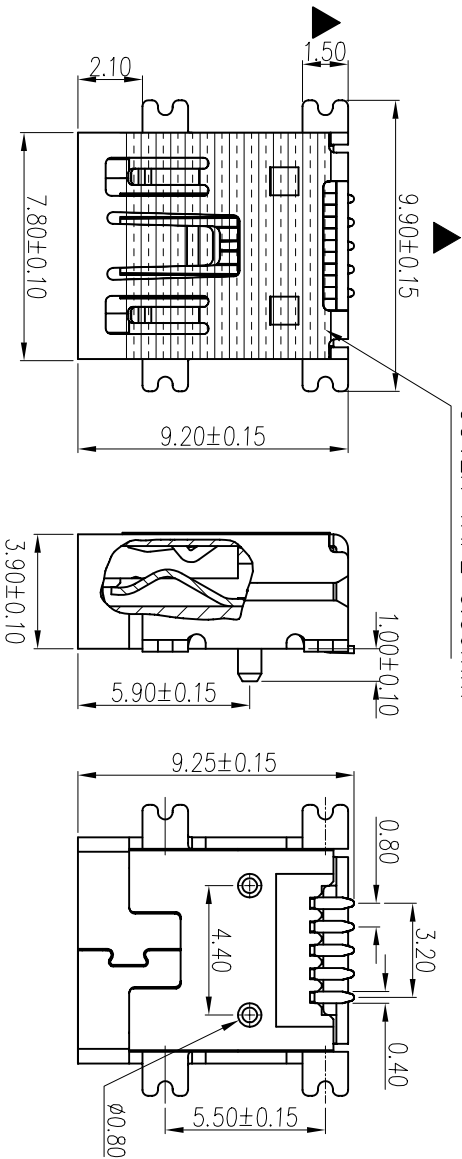

Note:

1.Material:


- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Phosphor bronze,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 29.4 Newtons Max.
- 2.6 Total unmating force: 4.9 Newtons Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 15u",30u".
- 3.2 shell:Nickel or Tin plated.

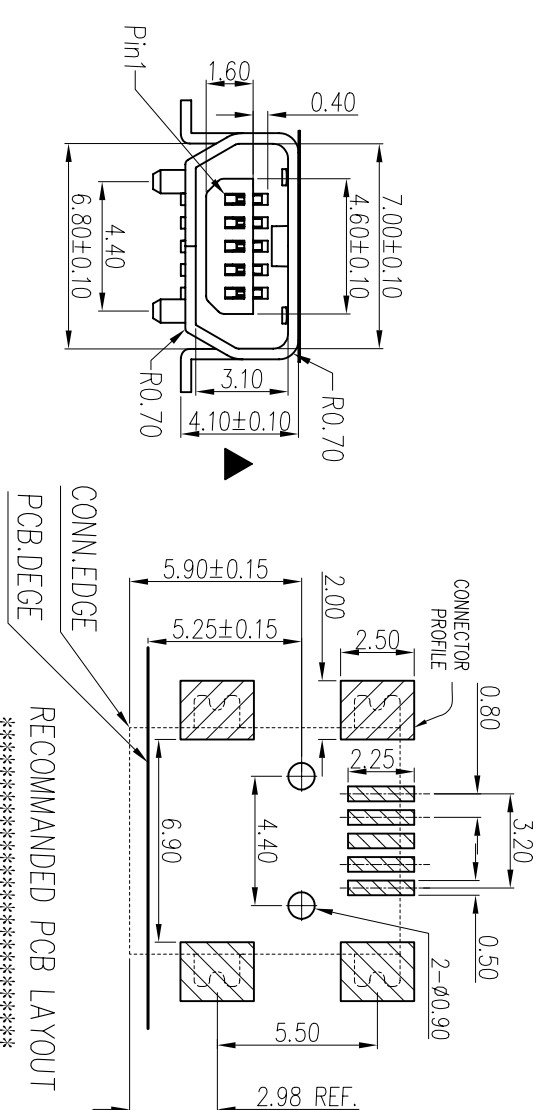

CONN.EDGE
PCB.DEGE
RECOMMENDED PCB LAYOUT

No.	Name	Qty	Material	Remarks & Thickness	Finish
3	Shell	1	Phosphor bronze	T=0.40mm	Nickel or Tin Plated
2	Contact	5	Phosphor bronze	T=0.25mm	Gold Flashed
1	Housing	1	LCP	UL 94-V0	Gray

PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: 段林麗 06/05/06	MINIUSB-5PIN(F) AB TYPE S.M.T		
.x ±0.20	CHK: Kevin 06/05/06	DWG NO:	S/A-321	REV:	A1
.xxx ±0.10	APP: Kent 06/05/06	SCALE:	4:1	SHEET:	1 of 1
ANG. ±1°					