


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
A1	▲	▲	依實物修改	2005/08/23	常各	

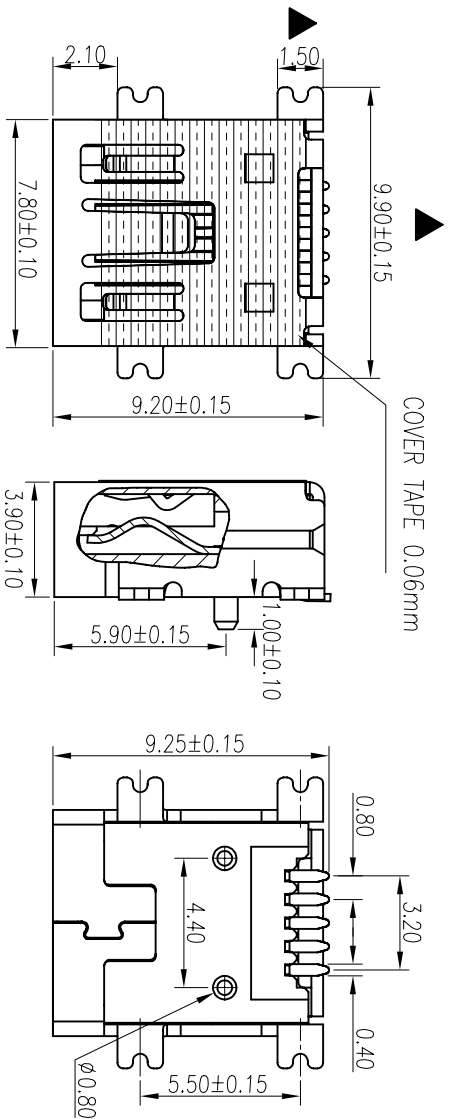

Note:

1.Material:


- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze,t=0.25mm.
- 1.3 Shell: Phosphor bronze,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 29.4 Newtons Max.
- 2.6 Total unmating force: 4.9 Newtons Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10U",15u",30u".
- 3.2 shell:Nickel or Tin plated.

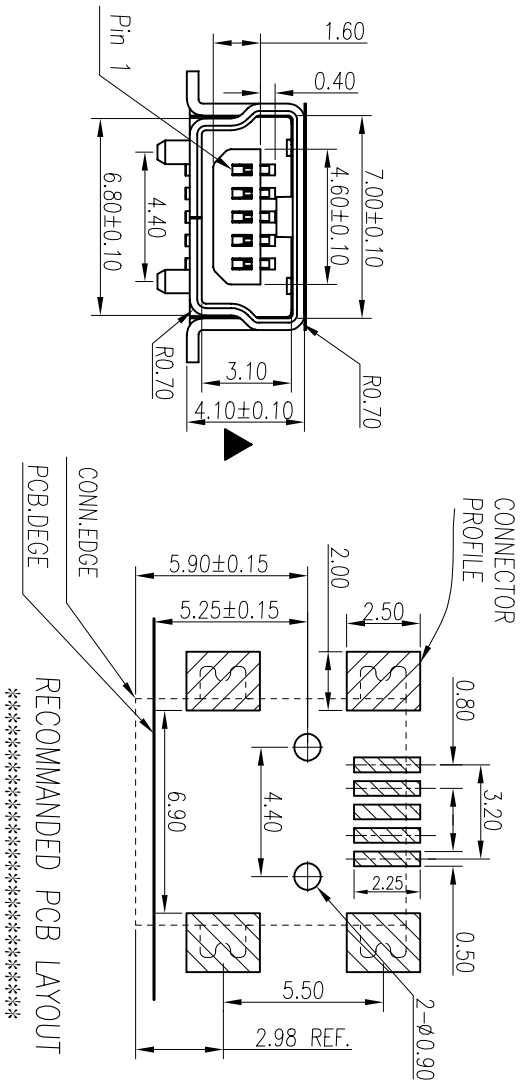

PART NO:	MATERIAL:				
MODEL NO:	FINSH:				
UNIT: mm	SIZE: A4	COLOR:	PART NAME:		
TOLERANCE UNSPECIFIED		DR: 段林麗	MINIUSB-5PIN(F) B TYPE S.M.T		
.x	±0.20	CHK: Kevin	DWG NO:	S/A-318	REV: A1
.xx	±0.10	APP: Kent	SCALE:	4:1	SHEET: 1 of 1
.xxx	±0.05				
ANG.	±1°				