

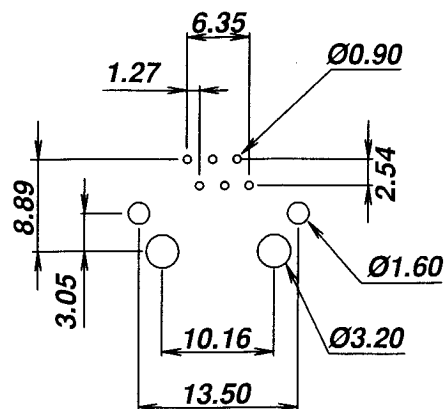
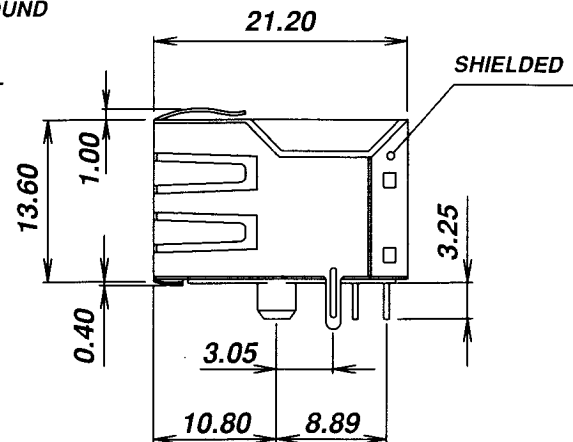


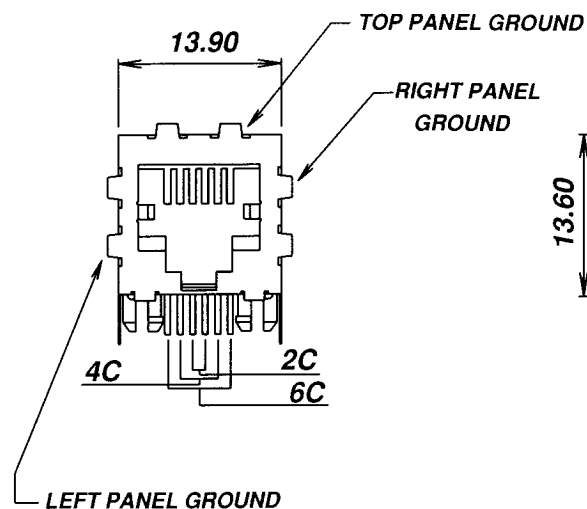

PCB LAYOUT
(Top View)



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Contact Wires : 0.45mm Dia. Phosphor bronze
Gold Plating Over Nickel
Temperature Range : - 25 /+90 Deg C
Durability : 500 Mating cycles Min.

AJ-007SH-6-X-X-B1-N5

B=6p2c, C=6p4c
D=6p6c

Gold plated 1=15u, 3=50u
2=30u, 4= 6 u

DWG. NO.

AS007008

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	DR. Steven CK'D Johnn APP'D Billy	NOV-23 '04 NOV-23 '04 NOV-23 '04
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15		

TITLE
RJ11 or RJ12 SIDE ENTRY SHIELDED PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-007SH-6-X-X-B1-N5

SCALE SIZE DWG. NO. 9636S SERIES