

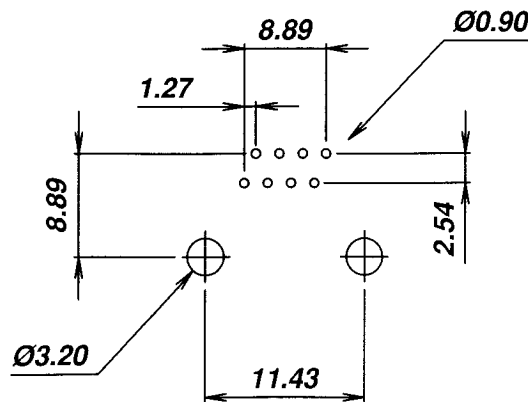
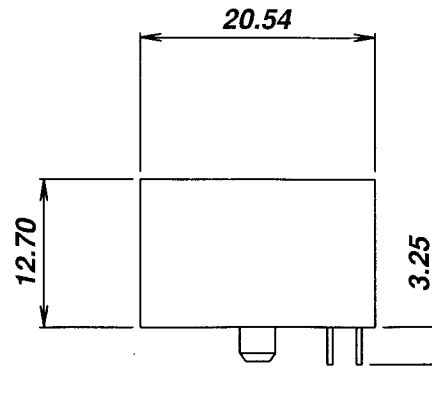




PCB LAYOUT
(Top View)



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.45mm Dia. Phosphor Bronze
Gold Plating Over Nickel
Temperature Range : - 25 /+90 Deg C
Durability : 500 Mating cycles Min.

AJ-008-8-F-X-N ← **FLANGELESS**

F=8p8c

Gold plated 1=15u , 3=50u
2=30u , 4= 6 u

DWG. NO. **AS008002**

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	CK'D Johnn	SEP-07 '04
$\frac{MM}{INCH}$	ANGLE $+0^{\circ}30'$	RADIL	$+0.45$ -0.15	APP'D Billy	SEP-07 '04

TITLE
RJ45 SIDE ENTRY PCB JACK
UL & cUL FILE NO. E131820
MODULAR JACKS ASSY FOR
AJ-008-8-F-X-N

SCALE SIZE DWG. NO. 9638 SERIES