

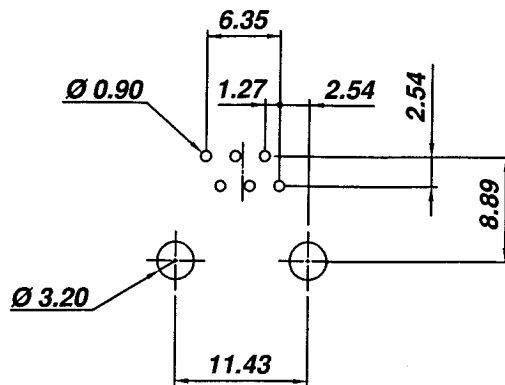
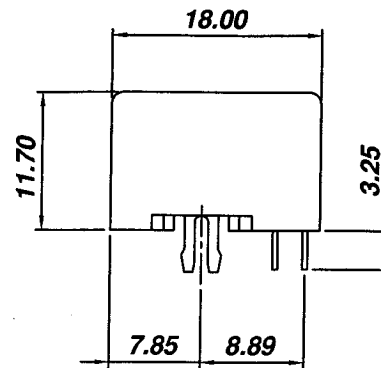


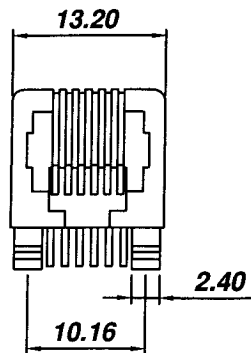

PCB LAYOUT
(Top View)



SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
Color : Black Color
Spring Wire : 0.45mm Dia. Phosphor bronze
Gold Plating Over Nickel
Temperature Range : - 25 /+90 Deg C
Durability : 500 Mating cycles Min.

AJ-019-6-X-X

B=6p2c, C=6p4c
D=6p6c

Gold plated
1=15u , 3=50u
2=30u , 4=6u

DWG. NO.

AS019002

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D Steven	JAN-12 '05
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D Johnn	JAN-12 '05
				Billy	JAN-12 '05

TITLE

VERY LOW PROFILE SIDE ENTRY PCB JACK
UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
AJ-019-6-X-X

SCALE SIZE DWG. NO. 9695 SERIES