

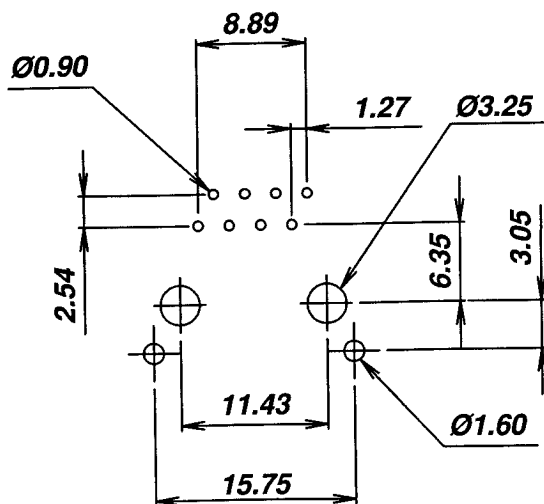
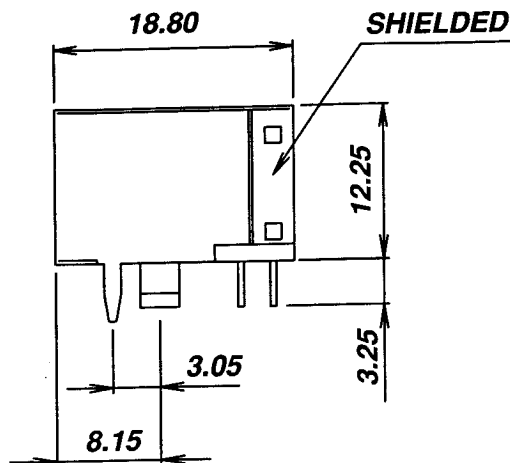




**PCB Layout
(Top View)**

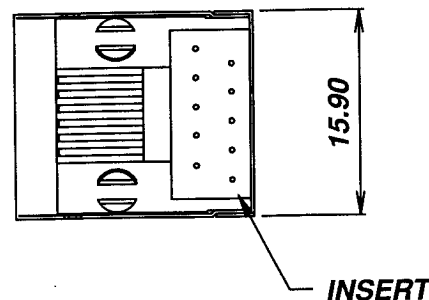

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
 Contact Resistance : 20milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 120V AC
 Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)
 Color : Black Color
 Spring Wire : 0.45mm Dia. Phosphor Bronze
 Gold Plating Over Nickel
 Temperature Range : - 25 /+90 Deg C
 Durability : 500 Mating cycles Min.

AJ-019SH-9-F-X-A1-N1

F=8p8c

Gold plated 1=15u, 3=50u
 2=30u, 4= 6 u

DWG. NO.
AS019024

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00 ± 0.01 000 ± 0.005 0000 ± 0.002	00 ± 0.25 000 ± 0.13 0000 ± 0.05	Steven	JAN-12 '05
MM INCH	ANGLE $+0^{\circ}30'$	RADIL	+0.45 -0.15	CK'D Johnn	JAN-12 '05
				APP'D Billy	JAN-12 '05

TITLE
 VERY LOW PROFILE PCB SHIELDED JACK
 UL & cUL FILE NO. E131820

MODULAR JACKS ASSY FOR
 AJ-019SH-9-F-X-A1-N1

SCALE SIZE DWG. NO. 9698S SERIES