
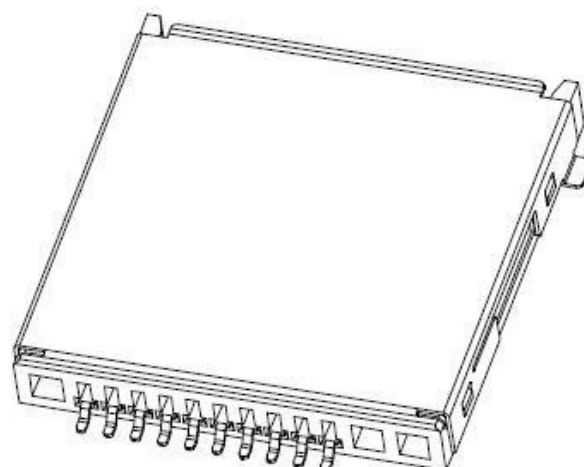
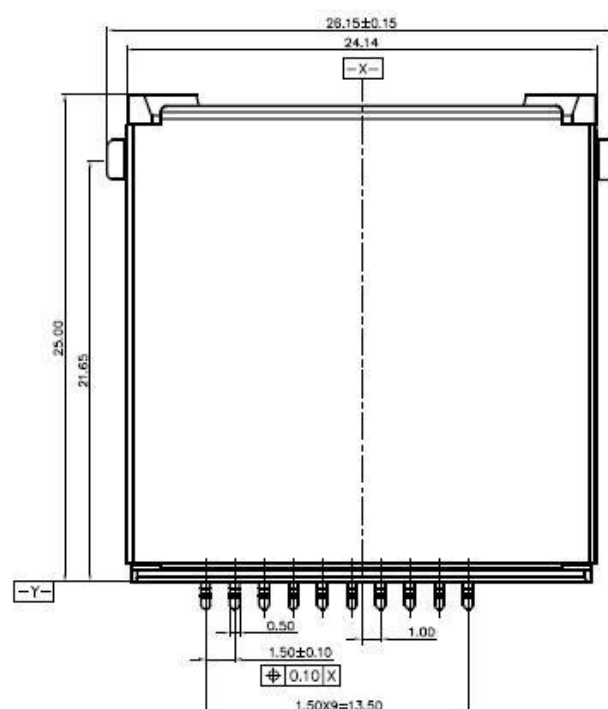


料號對照表 (Cross reference)

成品料號 Product No.	品名 Name
C23-2411-010	MS CONNECTOR SMT(全包)

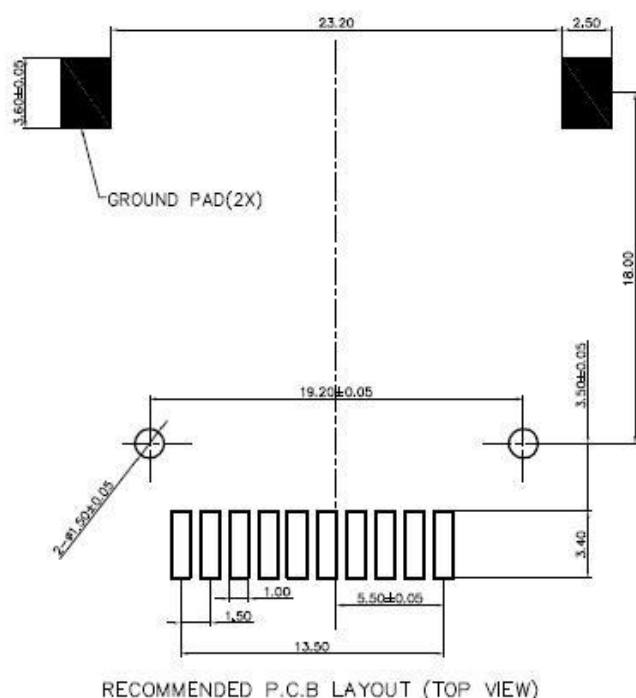

Notes:

1. All Dimensions are in Millimeters.
2. Operation voltage: 100 VAC max.
3. Current rating : 1 Amps max.
4. Contact resistance: 100m ohms max.
5. Insulation resistance: 1000M ohms min. 500 VDC
6. Dielectric withstanding voltage: 500 VAC / 1minute
7. Operating Temperature: -20. C to +60. C
8. Storage Temperature: -40. C to +70. C
9. Material see table.
10. Total Mating Force : 40N (MAX) at 25 mm/minute
11. Total Unmating Force: 2N (MIN) at 25 mm/minute
12. Single Pin Retation Force: 4.9N(MIN) at 25 mm/minute