
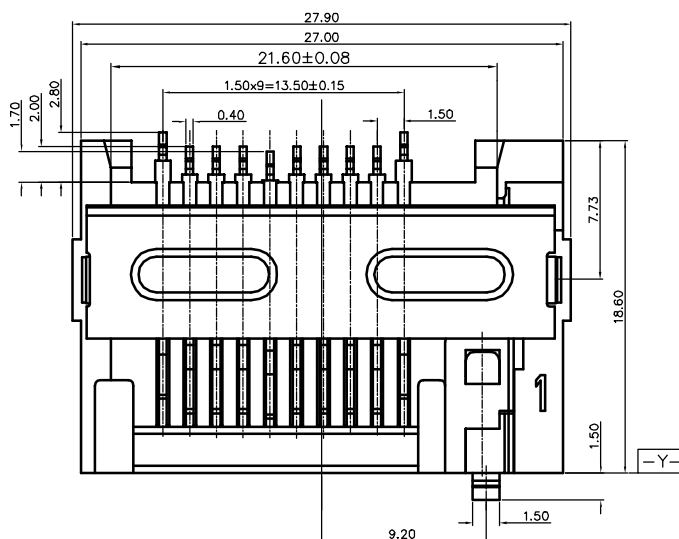


料號對照表(Cross reference)

成品料號 Product No.	品名 Name
C23-2410-010	MS CONNECTOR SMT半包

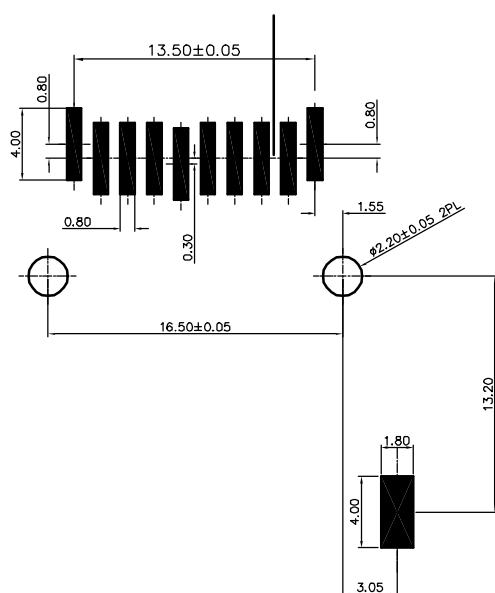

Recommended P.C.B Layout (Top view)

Notes:

- 1.All Dimensions are in Millimeters.
- 2.Operation voltage: 100 VAC max.
- 3.Current rating : 1 Amps max.
- 4.Contact resistance: 100m ohms max.
- 5.Insulation resistance: 1000M ohms min. 500 VDC
- 6.Dielectric withstanding voltage: 500 VAC / 1minute
- 7.Operating Temperature: -20°C to +60°C
- 8.Storage Temperature: -40°C to +70°C
- 9.Material see table.
10. Total Mating Force : 40N (MAX) at 25 mm/minute
- 11.Total Unmating Force: 2N (MIN) at 25 mm/minute
- 12.Single Pin Retention Force: 4.9N(MIN) at 25 mm/minute

