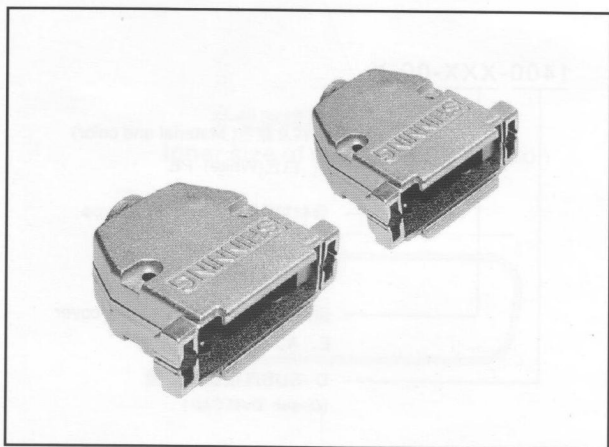



特点

- 采用锌基合金压力铸造成型, 表面镀镍;
- 符合VDE0781和FCC207屏蔽规则;
- 适用于 $\phi 3 \sim \phi 12$ mm 线缆;
- 全螺纹孔, 安装牢固。

Features

- Zinc alloy die cast cover surface is Ni plating.
- According to shielding rule of VDE0781 and FCC207.
- Applicable for wire: $\phi 3 \sim \phi 12$ mm
- Completely screw hole for setting fast.

1441-XX0-02-1

外壳材料为锌合金
(Cover material: Zinc alloy)
外壳镀层 (Cover plating)

层数 (Layers)	镀层厚度 (Plating thickness)
2	Ni 1um

触点数量 (Number of contacts)
09, 15, 25

系列代码 (Series code)

规格尺寸表 dimensions

No. of contact	A	B	C	D	E
09	20.50	41.20	25.00	31.30	$\phi 8$
15	27.60	37.30	33.30	39.80	$\phi 10.5$
25	40.90	44.70	47.04	53.04	$\phi 12$

