


0.5mm Board to Board Plug

2000P-017 Series

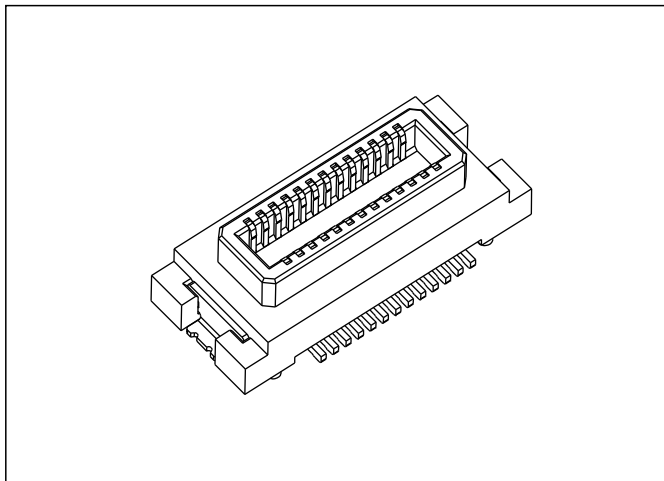

Specifications:





Current rating : 0.5Amps
Voltage rating : 50V AC/DC
Contact resistance : 30m ohm.max.
Insulation resistance : 100M ohm.
Withstanding voltage : AC 100V for one minute
Temperature range : -20°C to +105°C

Material and Finish

Insulator : High Temp. Plastic (UL94V-0)
Contact : Phosphor Bronze
Plating : Gold Plated

Feature

Mating Height: 4.0mm space
Design for Mobile Phone, MP3, Digital Camera

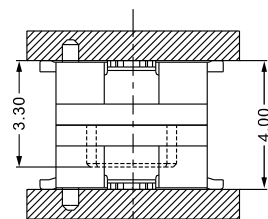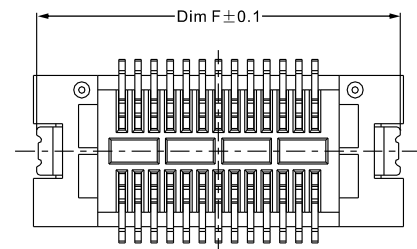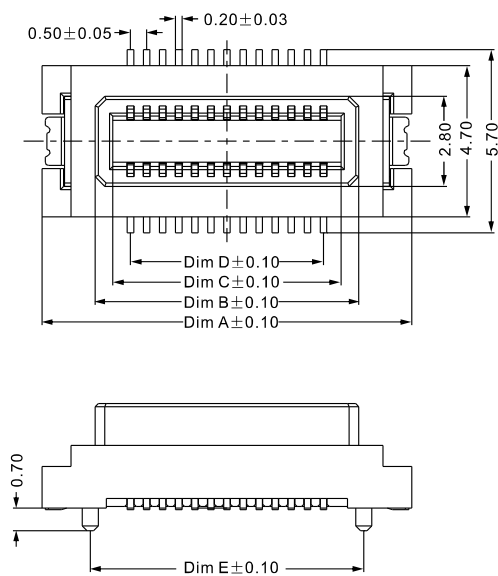

2000P-XXG-330-017 and 2001S-XXG-200-017
Mating Height Draw(Ref)

Engineering Dimension

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H
20	10.00	6.75	5.50	4.50	7.00	9.80	10.40	7.60
26	11.50	8.25	7.00	6.00	8.50	11.30	11.90	9.10
30	12.50	9.25	8.00	7.00	9.50	12.30	12.90	10.10
40	15.00	11.75	10.50	9.50	12.00	14.80	15.40	12.60
50	17.50	14.25	13.00	12.00	14.50	17.30	17.90	15.10
60	20.00	16.75	15.50	14.50	17.00	19.80	20.40	17.60
70	22.50	19.25	18.00	17.00	19.50	22.30	22.90	20.10
80	25.00	21.75	20.50	19.50	22.00	24.80	25.40	22.60

Ordering Information


2000P-XXG-330-017

① ② ③ ④ ⑤

① P: Plug	② No. Of Contacts	④ Height
	③ G: Gold Plated	⑤ Product Code

No. of contacts please consult to our sales dept.

Recommended PCB Layout

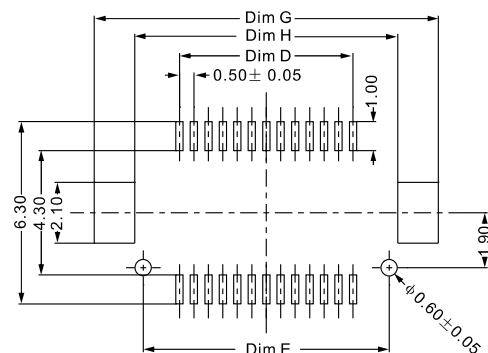

Unit:mm