


0.65mm Board to Board Plug

2065P Series

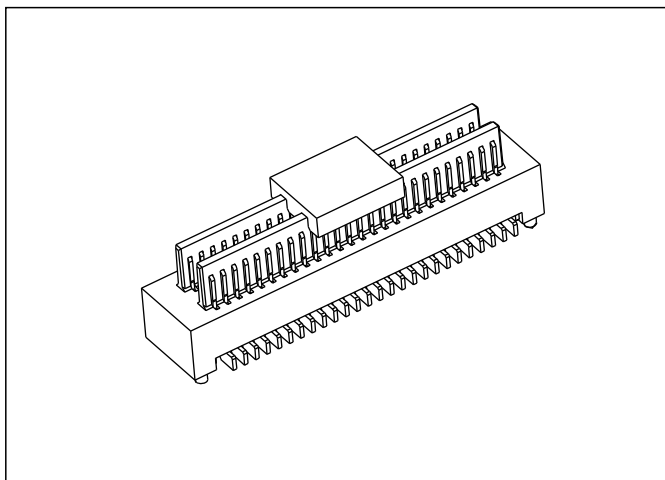

Specifications



Current rating:0.5AAC/DC
Voltage rating:60V AC/DC
Contact resistance:80m ohm. max.
Insulation resistance:1000M ohm. Min. At 100V DC
Withstanding voltage:150V AC for one minute
Operating temperature range:-25°C to +85°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Gold Plated

Feature

Mating Height:7.0mm Space
Design for Mobile Phone,MP3,Digital Camera

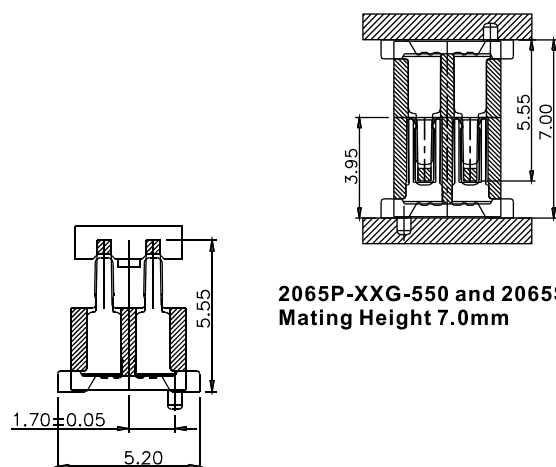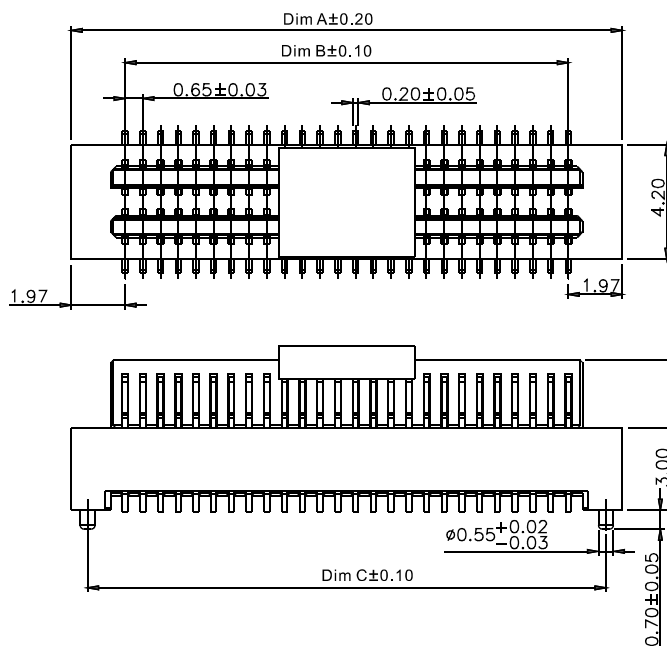

2065P-XXG-550 and 2065S-XXG-390
Mating Height 7.0mm

Engineering Dimension

Circuits	Dim. A	Dim. B	Dim. C
10	6.55	2.60	5.35
20	9.80	5.85	8.60
30	13.05	9.10	11.85
40	16.30	12.35	15.10
50	19.55	15.60	18.35
52	20.20	16.25	19.00

Ordering Information


2065P-XXG-550

① ② ③ ④

① P: Plug	② No. Of Contacts	④ Height
	③ G: Gold Plated	

No. of contacts please consult to our sales dept.

Recommended PCB Layout

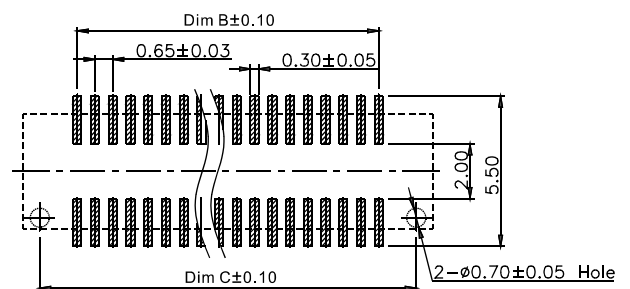

Unit:mm