


0.65mm Board to Board Socket

2065S Series

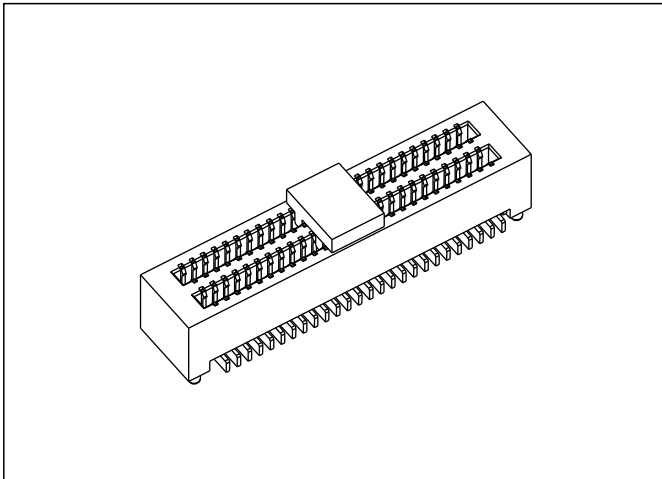

Specifications

Current rating:0.5AAC/DC

Voltage rating:60V AC/DC

Contact resistance:80m ohm. max.

Insulation resistance:1000M ohm. Min. At 100V DC

Withstanding voltage:150V AC for one minute

Operating temperature range:-25°C to +85°C

Material and Finish

Insulator:High Temp. Plastic(UL94V-0)




Contact:Phosphor Bronze

Plating:Gold Plated

Feature

Mating Height:7.0mm Space

Design for Mobile Phone,MP3,Digital Camera

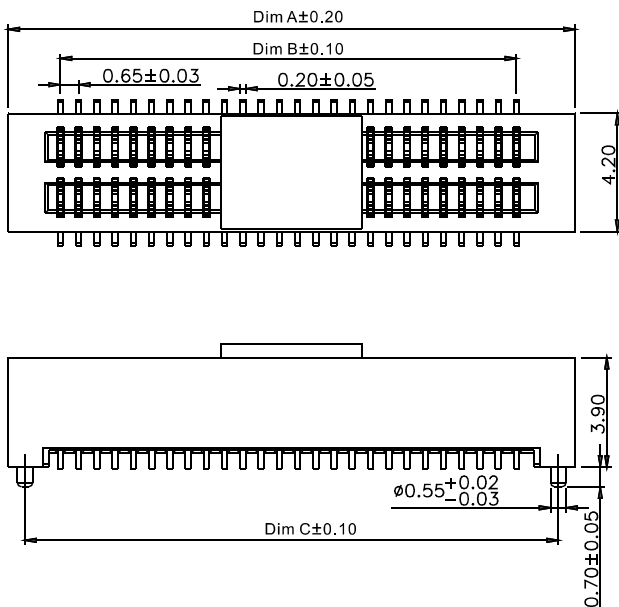

2065P-XXG-550 and 2065S-XXG-390
Mating Height 7.0mm

Engineering Dimension

Circuits	Dim. A	Dim. B	Dim. C
10	6.55	2.60	5.35
20	9.80	5.85	8.60
30	13.05	9.10	11.85
40	16.30	12.35	15.10
50	19.55	15.60	18.35
52	20.20	16.25	19.00

Ordering Information


2065S-XXG-390

① ② ③ ④

① S:Socket	② No. Of Contacts	④ Height
	③ G:Gold Plated	

No. of contacts please consult to our sales dept.

Recommended PCB Layout

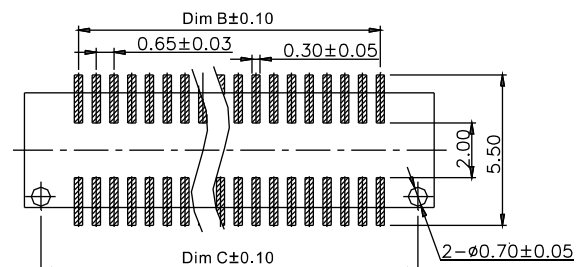

Unit:mm