

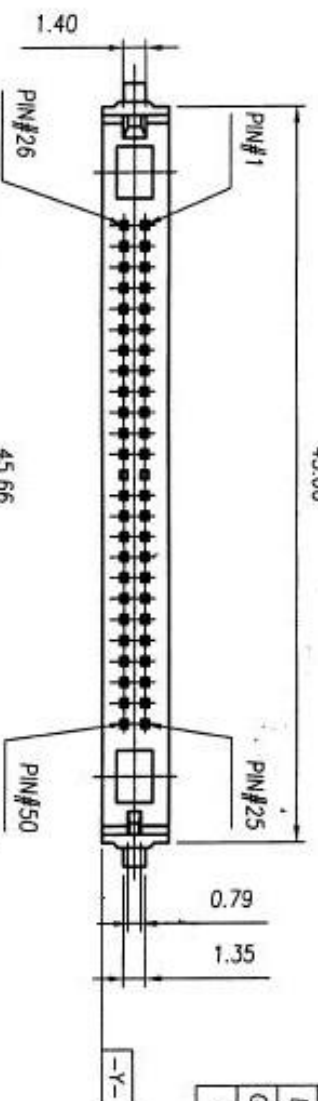
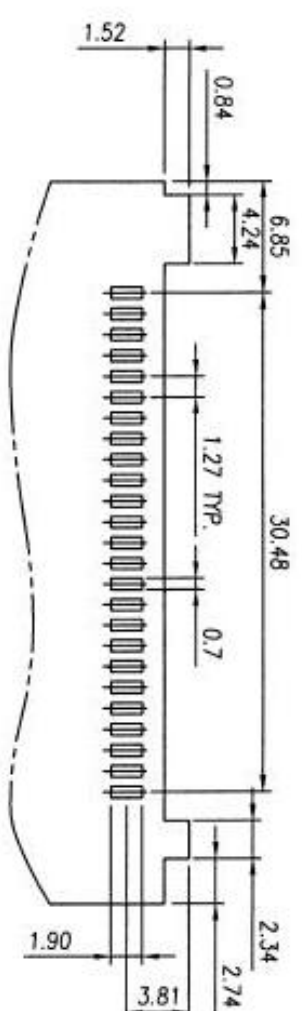


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Defect	3.5 mm	25,26				
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

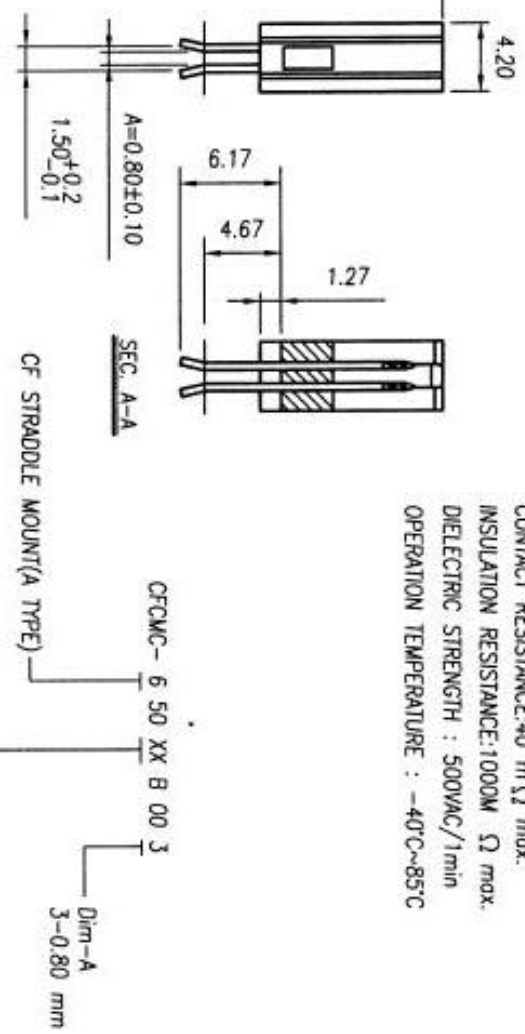

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 mΩ max.
 INSULATION RESISTANCE:1000M Ω max.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

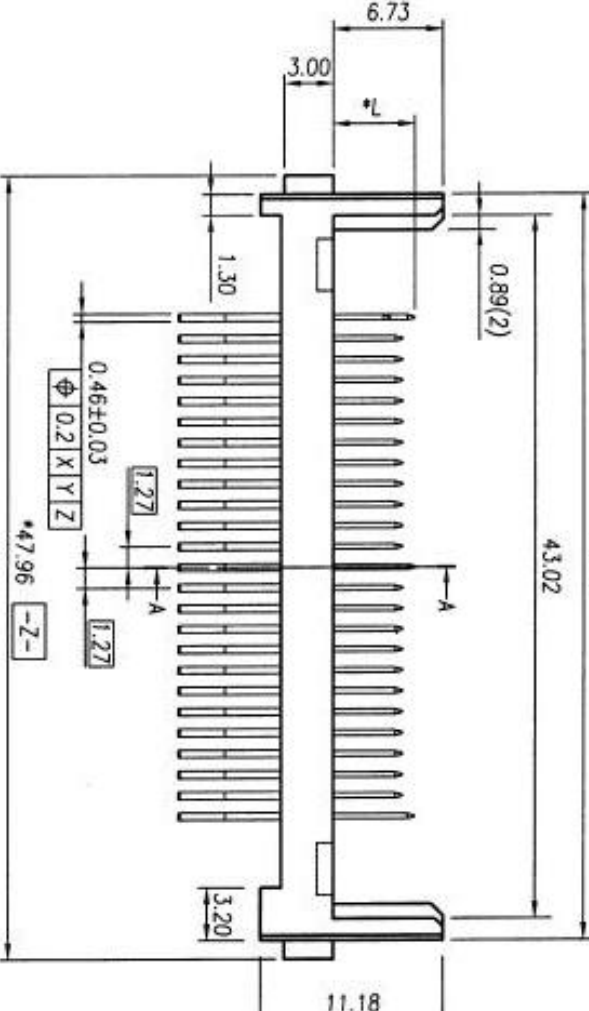

RECOMMENDED P.C.B PATTERN

DIMENSION IN mm (inch)		PROD. SPEC. SP0049	TITLE		CF STRADDLE MOUNT		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	FILE NO. KFP-049		DWG NO. CFCMC-650XXB003		SHEET 1	
.X±0.30	X.± 1"	APPROVE	SIZE		A4		SCALE 2:1	
.XX±0.20	X.± 0.5"	CHECK	REV		A		REV	
.XXX±0.10	.XX± 0.25"	DRAW						