
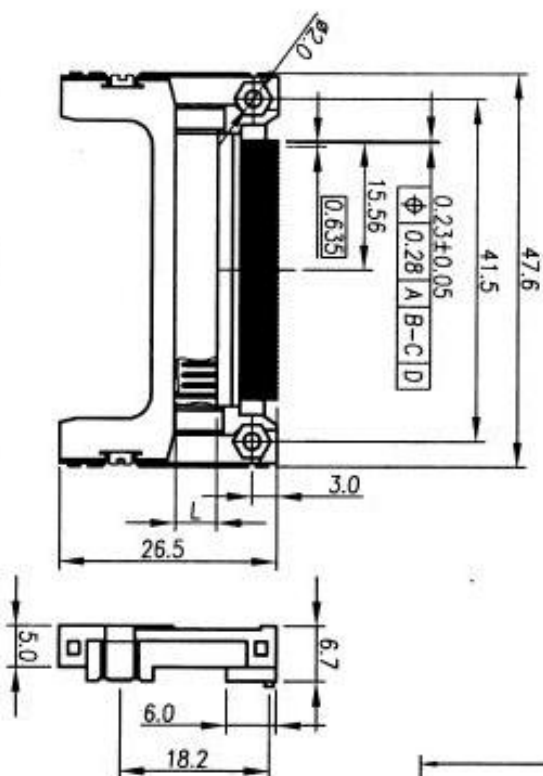
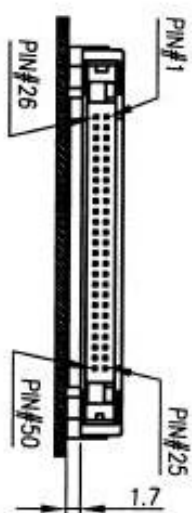
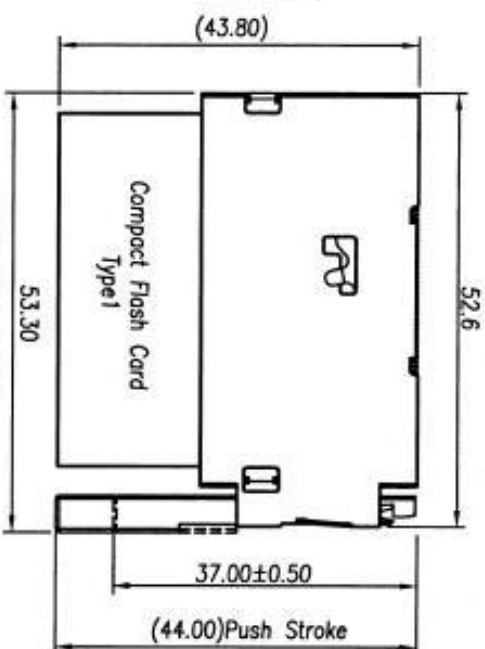



Pin Type	DIM.L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26				
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

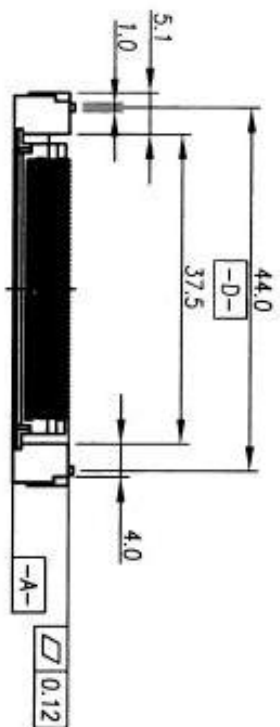

SPECIFICATIONS:
 HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE: 40 m Ohm max.
 INSULATION RESISTANCE: 1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40C~85C

Ordering Information:
 CFC M D - 1 5 X XX W 00 0

Pin No. 50 Position
 Color: W-White.
 TYPE 1
 0 : TIN/LEAD 90/10
 T : LEAD FREE TIN 100%
 Contact Area Plating:
 15--15U" Gold Plating.
 30--30U" Gold Plating.

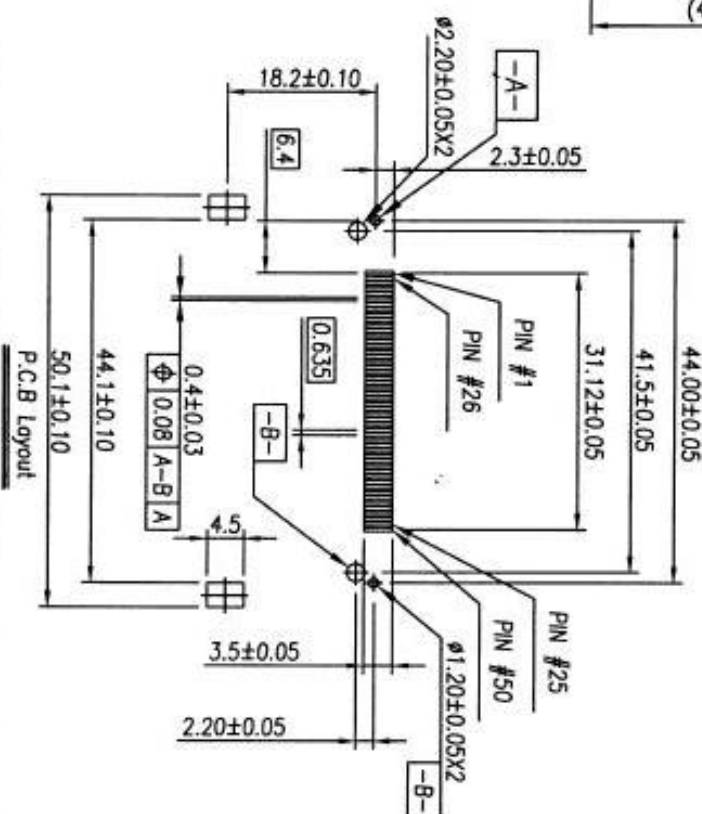

DIMENSION IN mm (inch)		PROD. SPEC.	PROJ. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		SP0011	SP0011
.X±0.30	X.±1"	APPROX.	APPROX.
.XX±0.20	.X±0.5"	CHECK	CHECK
.XXX±0.10	.XX±0.25"	DRG.	DRG.
FILE NO. KFP-011		DWG NO. CFCMD-15XXXW000	
TITLE 1.27mm CF CARD CONN. 50PIN TYPE1 NORMAL TYPE		CUSTOMER DRAWING	
SIZE A4		SCALE 1:1	
PROJ. SHEET 1		REV A	