
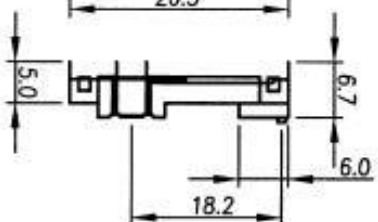
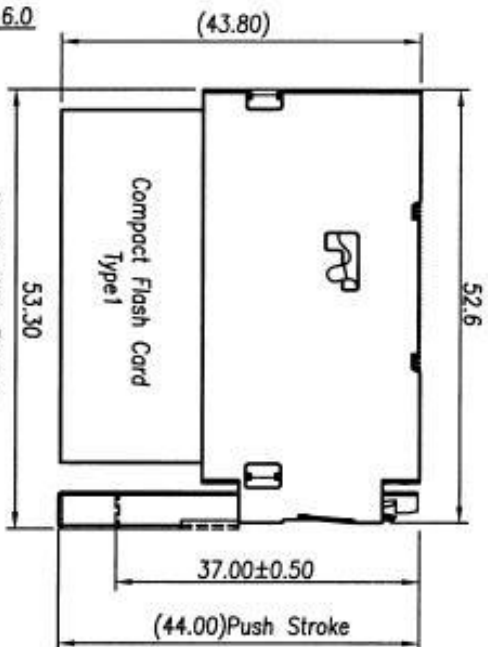


Pin Type	DIM.L	Pin Type	REV	MODIFICATION	DATE	DRAW
Pin Type						
Detect	3.5 mm	25,26				
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

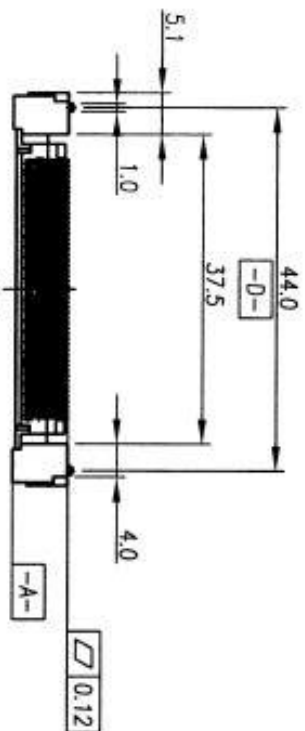


SPECIFICATIONS:
HOUSING : High Temperature Plastic, UL 94V-0
CONTACT : Copper Alloys
VOLTAGE RATING : 100VAC
CURRENT RATING : 0.5A
CONTACT RESISTANCE: 40 m Ohm max.
INSULATION RESISTANCE: 1000M Ohm min.
DIELECTRIC STRENGTH : 500VAC/1min
OPERATION TEMPERATURE : -40C~85C

Ordering Information:
CFC M D - 1 5 X XX W 00 1

Pin No. 50 Position
Color: W-White.
TYPE 2

0 : TIN/LEAD 90/10
1 : LEAD FREE TIN 100%
Contact Area Plating:
15--15U" Gold Plating.
30--30U" Gold Plating.

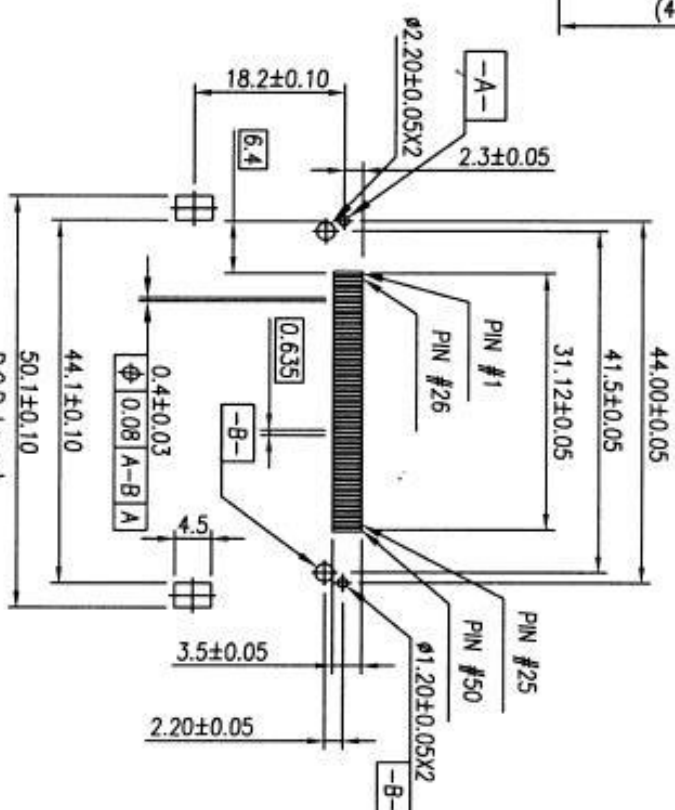

P.C.B Layout

DIMENSION IN mm [inch]	TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJ. SPEC. SP0011	FILE NO. KFP-011	DWG NO. CFCMD-15XXXW001
.X±0.30	X.± 1"	APPROVE: [Signature]	1.27mm CF CARD CONN.	CUSTOMER DRAWING
.XX±0.20	X± 0.5"	CHECK: [Signature]	50PIN TYPE1,2 NORMAL TYPE	
.XXX±0.10	.XX± 0.25"	DATE: [Signature]		
		SIZE: A4		
		SCALE: 1:1		
		REV: A		