
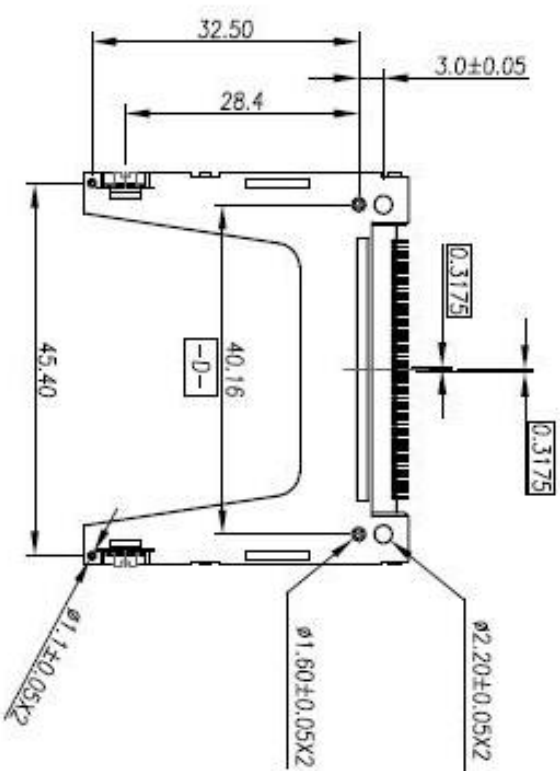
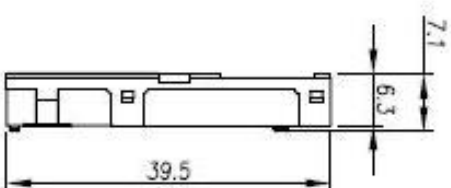
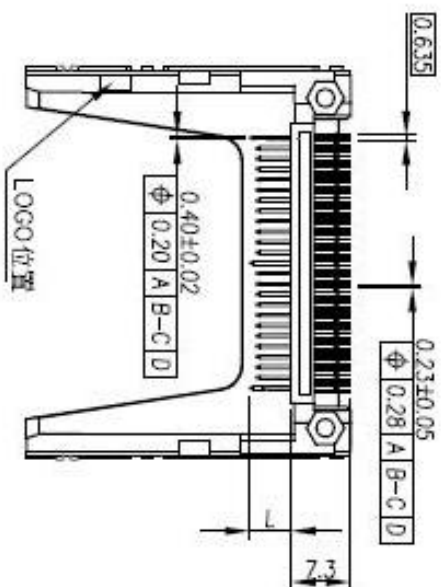
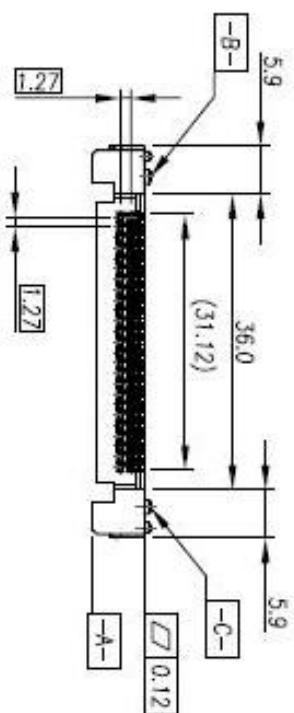


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	E	EN-01-0402	04.01.02	JACK
General	4.25 mm	All Other Pins	F	EN-03-0415	04.18.03	TONY
Power	5.0 mm	1,13,38,50	G	EN-05-0611	05.06.03	TONY


DIMENSION IN mm [inch]		PROD. SPEC. SP0013	CF Card Conn.SMT Type2 50pin NORMAL TYPE		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PMG. SPEC. PPP-CFC-003				
.X±0.30	X.± 1"	APPROVE	FILE NO. KFP-013		DWG NO. CFCMD-25XXXXW000	
.XX±0.20	.X± 0.5"	CHECK	SIZE A4		PROJ. SHEET 1 / 2	
.XXX±0.10	.XX± 0.25"	DRAW	SCALE 1:1		REV G	

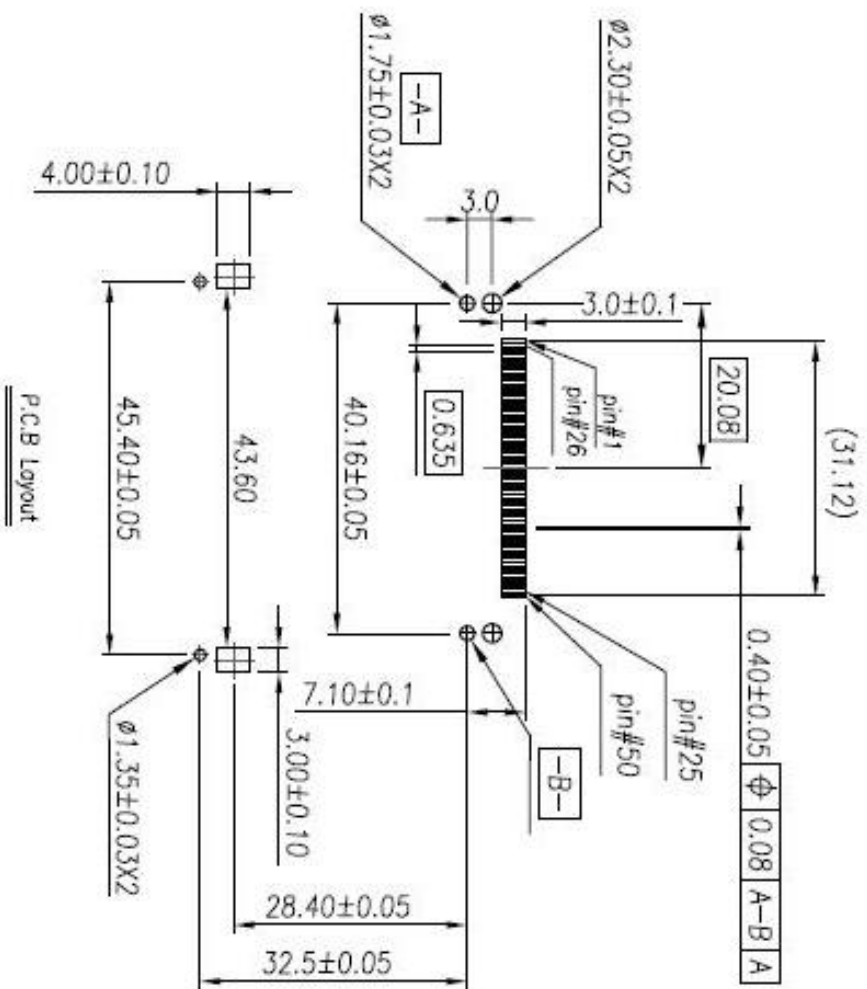

P.C.B Layout

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

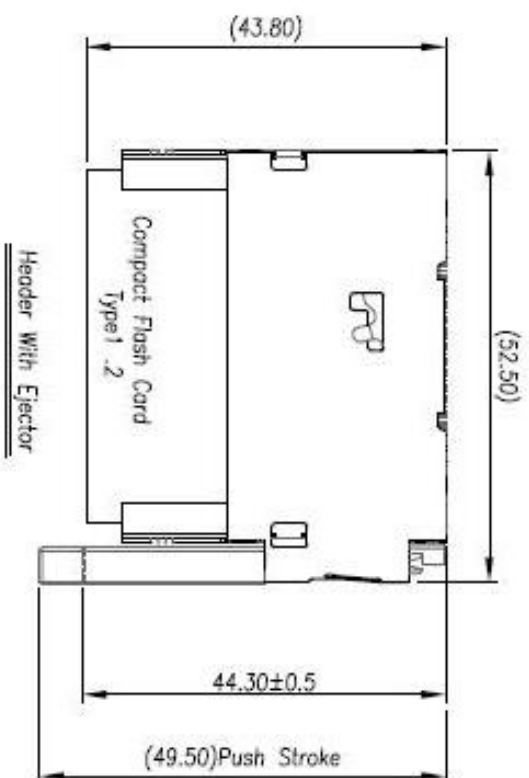

REV	MODIFICATION	DATE	DRAW
E	EN-01-0402	04.01.02	JACK
F	EN-03-0415	04.18.03	TONY
G	EN-05-0611	05.06.03	TONY

Ordering Information:

CFC M D - 2 5 X XX W 0 0 0
 TYPE 2
 Pin No.
 Color:
 W-White
 0 : NORMAL TYPE
 0 : TIN/LEAD 90/10
 T : LEAD FREE TIN 100%
 Contact Area Plating:
 15--15U" Gold Plating.

DIMENSION IN mm [inch]		PROJ. SPEC. SP0013		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PWG. SPEC. PFP-CFC-003	TITLE CF Card Conn.SMT Type2	
.X±0.30	X.± 1"	APPROVE	50pin NORMAL TYPE	
.XX±0.20	X.± 0.5"	CHECK	FILE NO. KFP-013	
.XXX±0.10	.XX± 0.25"	DRAW	DWG NO. CFCMD-25XXXXW000	
SIZE A4		PROJ.	CUSTOMER DRAWING	
SCALE 1:1		SHEET 2 / 2	REV G	