
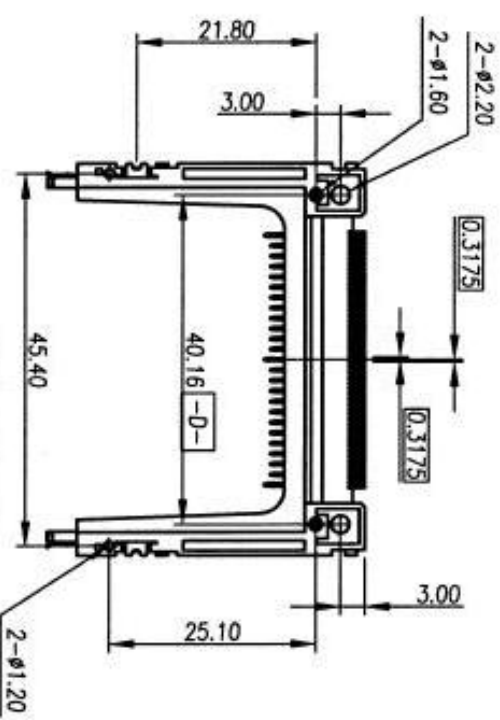
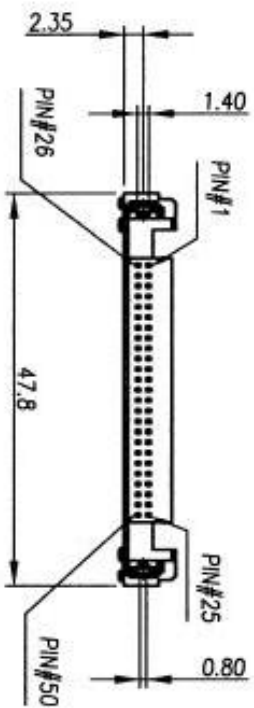


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	C	EN-02-0315	3/18	JACK
General	4.25 mm	All Other Pins	D	EN-03-0407	4/4	TONY
Power	5.0 mm	1,13,38,50	E	EN-05-0104	1/4/2005	TONY

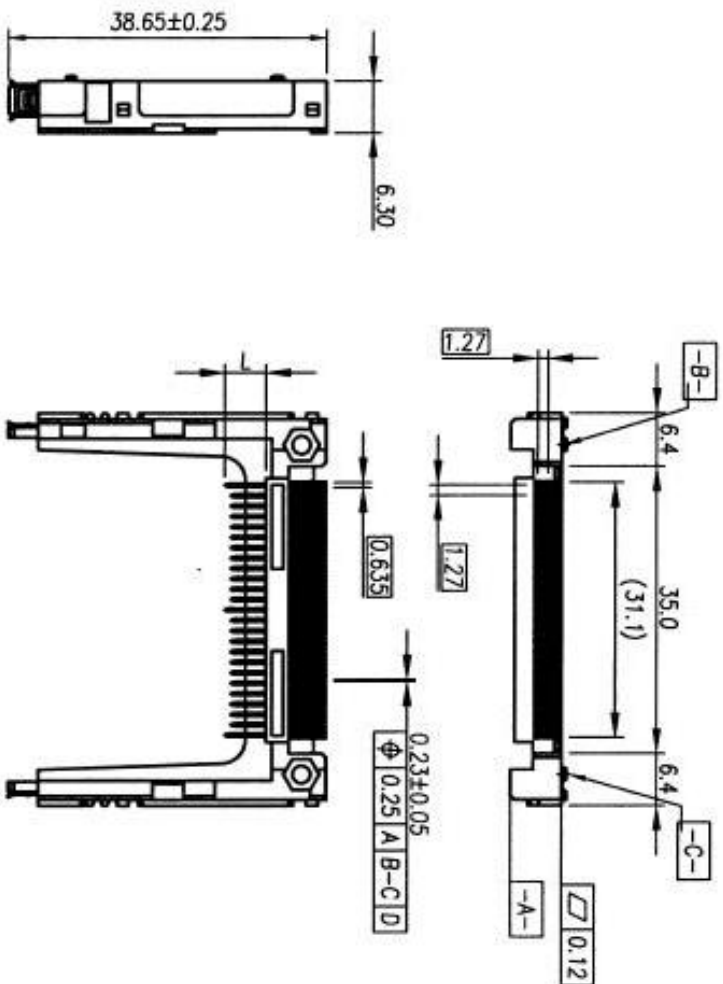

Ordering Information:

CFC M D - 3 5 X XX W 0 0 0


Pin No. Color: W-White.

0 : TIN/LEAD 90/10
T : LEAD FREE TIN 100%

0 : NORMAL TYPE
STAND OFF
0 : 0mm

Contact Area Plating:
15-15U" Gold Plating.

DIMENSION (in mm [inch])	PROG. SPEC. SP0025	FILE NO. KFP-025	DWG NO. CFCMD-35XXXW000	CUSTOMER DRAWING
TOLERANCE UNLESS OTHERWISE SPECIFIED	PWG. SPEC. PPP-CFC-003	TITLE CF TYPE2 ,SOPIN SMT NORMAL TYPE		
.X±0.30	X.±1"	APPROVE: [Signature]		
.XX±0.20	X.±0.5"	CHECK: [Signature]		
.XXX±0.10	.XX±0.25"	DATE: 1/1/05	SCALE 1:1	REV E

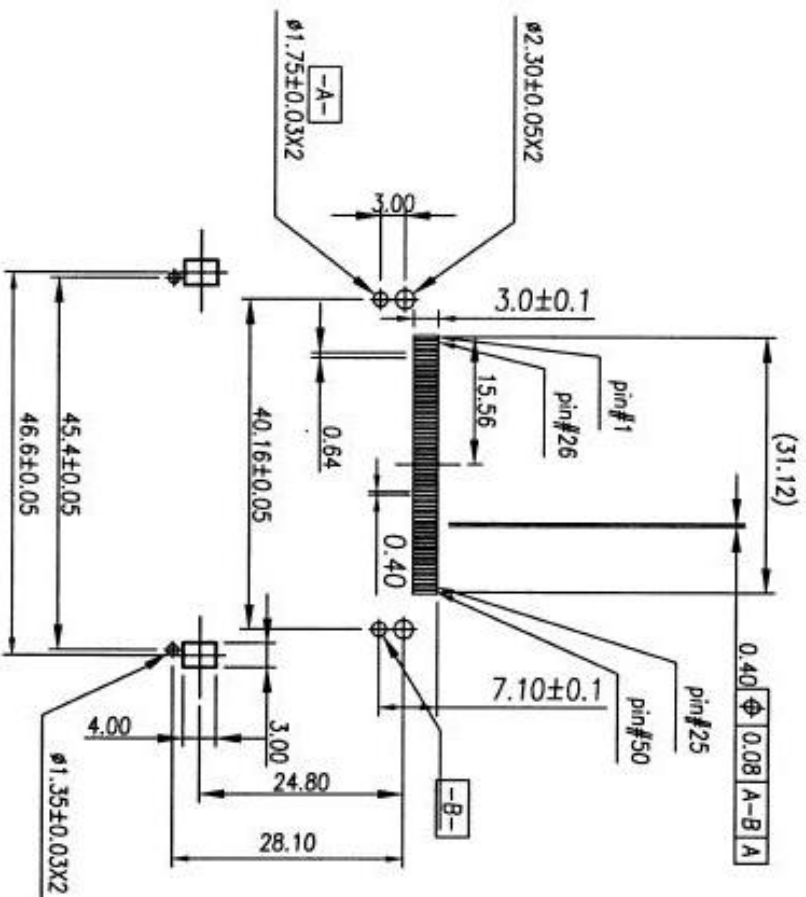

P.C.B Layout

Ordering Information:


CFC M D - 3 5 X XX W 0 0 0

Pin No. TYPE 2 Color: W-White.

0 : TIN/LEAD 90/10
T : LEAD FREE TIN 100%

0 : NORMAL TYPE
STAND OFF 0 : 0mm

Contact Area Plating:
15-15U" Gold Plating.

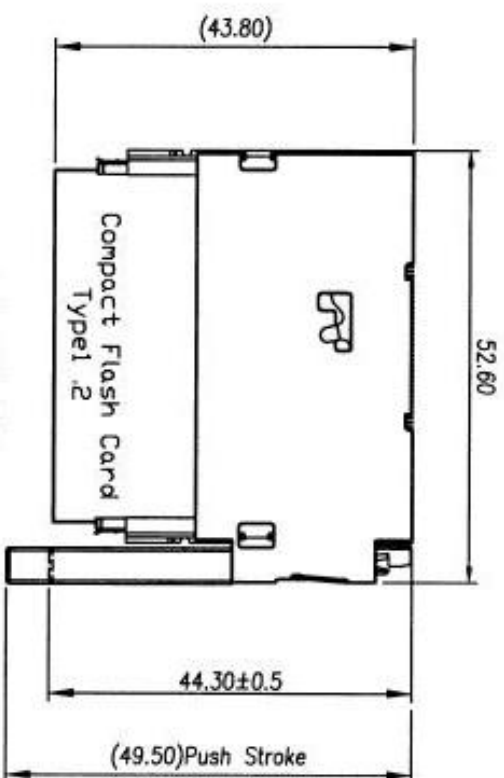

Header With Ejector

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0

CONTACT : Copper Alloys

VOLTAGE RATING : 100VAC

CURRENT RATING : 0.5A

CONTACT RESISTANCE: 40 m Ohm max.

INSULATION RESISTANCE: 1000M Ohm min.

DIELECTRIC STRENGTH : 500VAC/1min

OPERATION TEMPERATURE : -40°C~85°C

REV	MODIFICATION	DATE	DRAW
C	EN-02-0315	3/18	JACK
D	EN-03-0407	4/4	TONY
E	EN-05-0104	1/4/2005	TONY

DIMENSION IN mm [inch]		PROG. SPEC. Sp0025
TOLERANCE UNLESS OTHERWISE SPECIFIED	PPG. SPEC. PPP-CFC-003	
.X±0.30	X: ± 1"	APPROV. 06/06/05
.XX±0.20	.X: ± 0.5"	CHECK 06/04/05
.XXX±0.10	.XX: ± 0.25"	DRAW 06/04/05
FILE NO. KFP-025		DWG NO. CFCMD-35XXXW000
TITLE CF TYPE2 .50PIN SMT NORMAL TYPE		CUSTOMER DRAWING
SIZE A4	PROL. SHEET 2	SCALE 1:1 REV E