

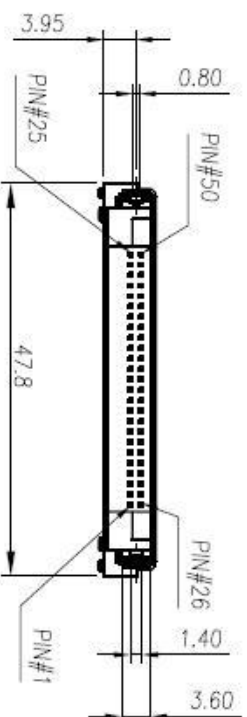
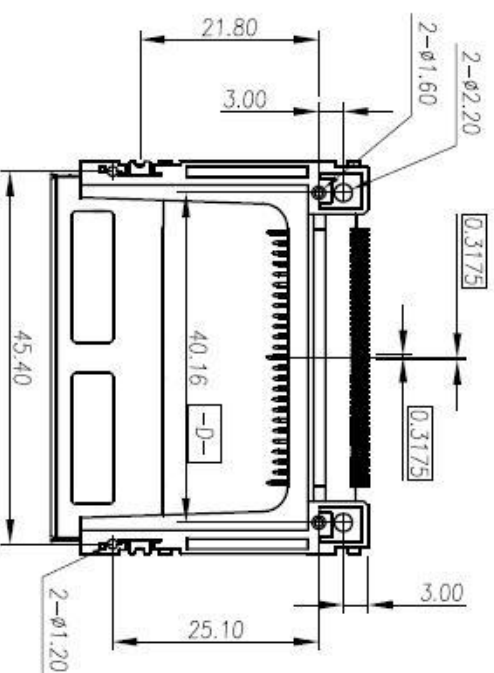
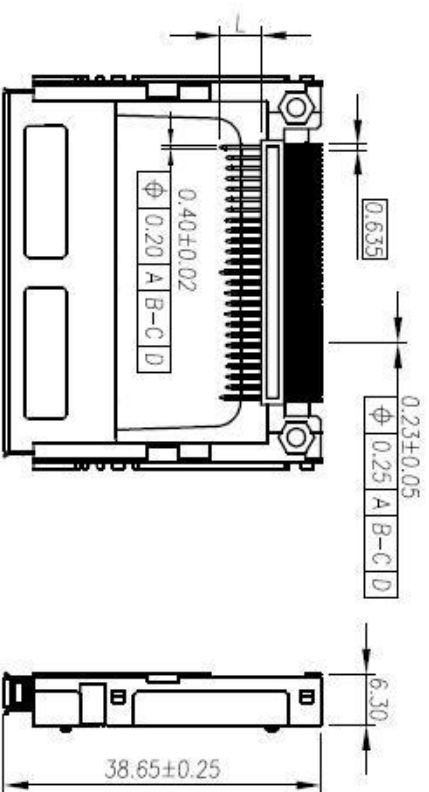


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-05-1202	12/01/2005	TONY
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

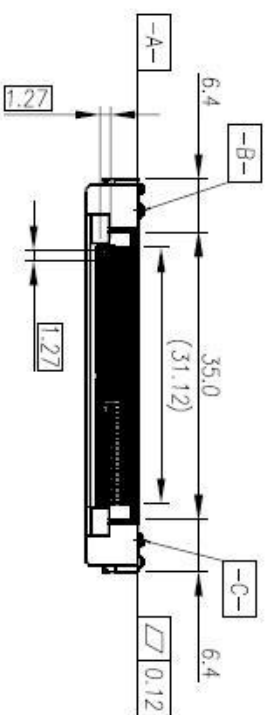


DIMENSION IN mm [inch]		PROJ. SPEC. SP0025		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PFP-CFC-003	TITLE	
.X±0.30	X.± 1"	APPROVE	CF TYPE2 .50PIN SMT TYPE REVERSE TYPE	
.XX±0.20	X.± 0.5"	CHECK	FILE NO. KFP-025	
.XXX±0.10	.XX ± 0.25"	DRAW	DWG NO. CFCMD-35XXXW030	
SIZE		A4		CUSTOMER DRAWING
SCALE		1:1		PROJ. SHEET 1
				REV B

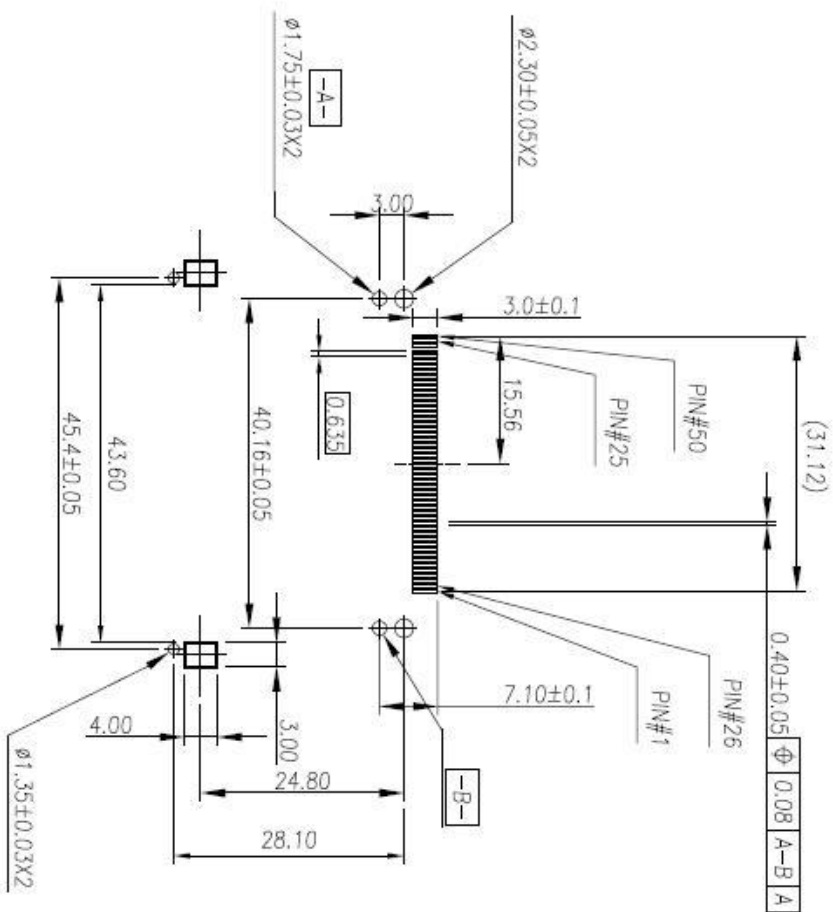

P.C.B Layout

Ordering Information:
 CFC M D - 3 5 X XX W 0 3 0
 TYPE 2
 Pin No.
 50 Position
 Color:
 W-White
 0 : TIN/LEAD 90/10
 T : LEAD FREE
 0:STAND-OFF 0mm
 3 : REVERSE TYPE
 Contact Area Plating:
 15--150" Gold Plating.
 30--30U" Gold Plating.

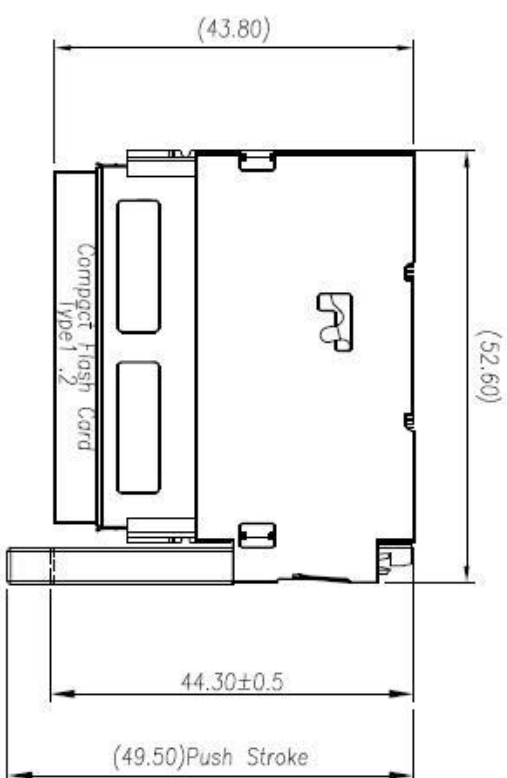

Header With Ejector

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

REV	MODIFICATION	DATE	DRAW
B	EN-05-1202	12/01/2005	TONY

DIMENSION IN mm [inch]		PROD. SPEC. SP0025	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-003	
.X±0.30	X.± .1"	APPROVE	
.XX±0.20	.X± 0.5"	CHECK	
.XXX±0.10	.XX± 0.25"	DRAW	
TITLE CF TYPE2, 50PIN SMT TYPE REVERSE TYPE		FILE NO. KFP-025	
		DWG NO. CFCMD-35XXXW030	
SIZE A4		PROJ.  SHEET 2 / 2	
SCALE 1:1		REV B	