
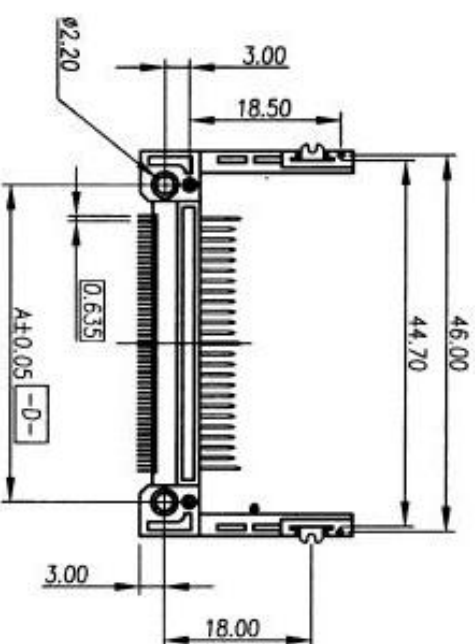

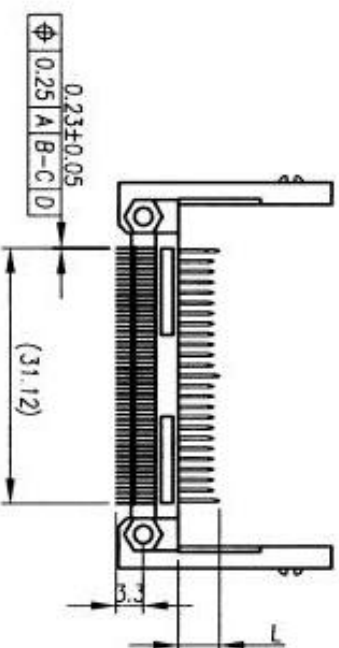
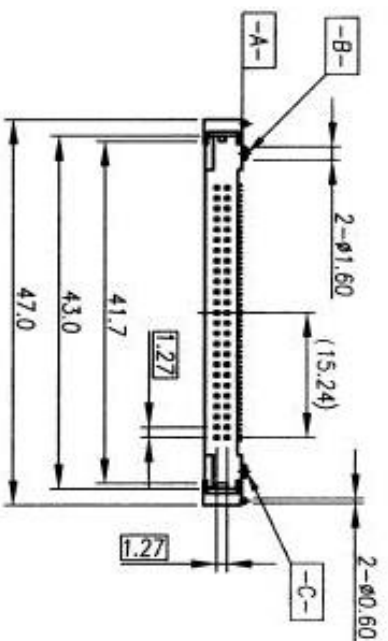
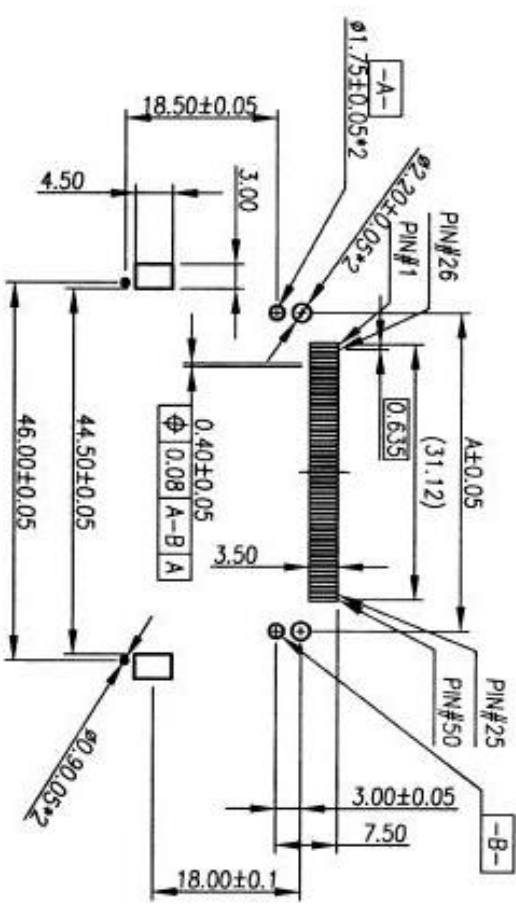
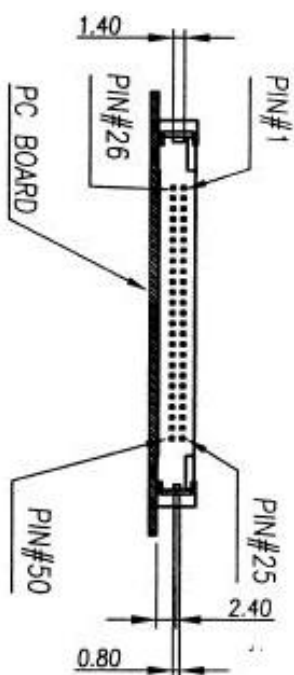


Pin Type	DIM L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25.26	D	EN-02-0906	09/04/02	TOM
General	4.25 mm	All Other Pins	E	EN-04-0211	02/20/04	TONY
Power	5.0 mm	1,13,38,50	F	EN-05-0116	01/11/05	TONY

DIMENSION IN mm [inch]		PROD. SPEC. SP0028	CF CARD CONN. TYPE 1.2		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-004	TITLE		DWG NO. CFCMD-45XXXW00X	
.X±0.30	X.± 1"	APPROVE. 11/1/05	STAND-OFF 0.0mm NORMAL TYPE		SHEET 1	
.XX±0.20	X.± 0.5"	CHECK 11/1/05	FILE NO. KFP-028		2	
.XXX±0.10	.XX± 0.25"	DRAW 11/1/05	SIZE A4		SCALE 1:1	

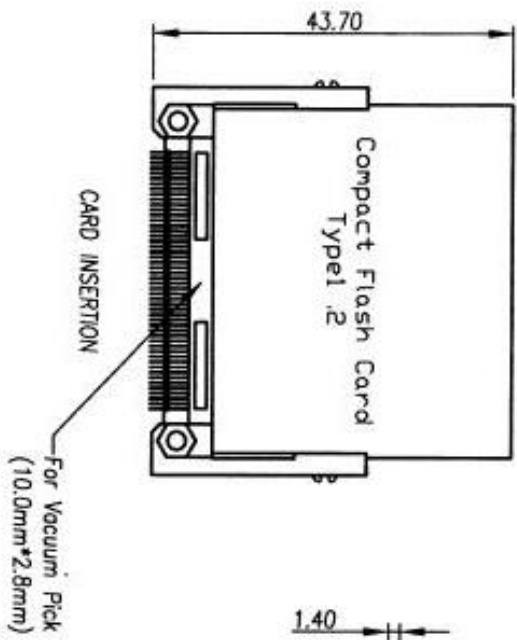

P.C.B Layout

Ordering Information:

CFC M D -4 5 X XX W 0 0 X

TYPE 2

Pin No. 50 Position

Color: W--White.

DM-A 0-38.74 1-40.16

0 : TIN/LEAD 90/10

T : LEAD FREE TIN 100%

0 : STANDOFF 0mm

Contact Area Plating:

15--15U" Gold Plating.

30--30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0

CONTACT : Copper Alloys

VOLTAGE RATING : 100VAC

CURRENT RATING : 0.5A

CONTACT RESISTANCE:40 m Ohm max.

INSULATION RESISTANCE:1000M Ohm min.

DIELECTRIC STRENGTH : 500VAC/1min

OPERATION TEMPERATURE : -40°C~85°C

REV	MODIFICATION	DATE	DRAW
D	EN-02-0906	09/04/02'	TOM
E	EN-04-0211	02/20/04'	TONY
F	EN-05-0116	01/11/05'	TONY

DIMENSION IN mm [inch]		PROJ. SPEC. SP0028		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. SPEC. PFP-CFC-004	CF CARD CONN. TYPE1,2	
.X±0.30		X.±1"	STAND-OFF 0.0mm NORMAL TYPE	
.XX±0.20		X.±0.5"	FILE NO. KFP-028	
.XXX±0.10		XX.±0.25"	DWG NO. CFCMD-45XXXW00X	
DRAW		CHECK	PROJ. SHEET 2	
SIZE A4		SCALE 1:1	REV F	

CUSTOMER DRAWING