
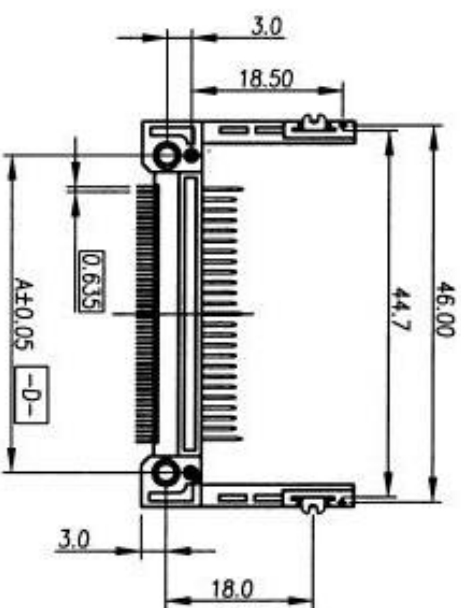
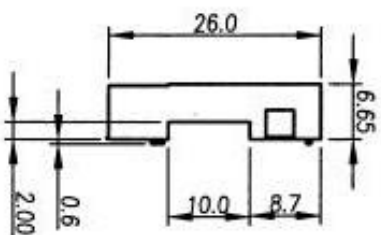
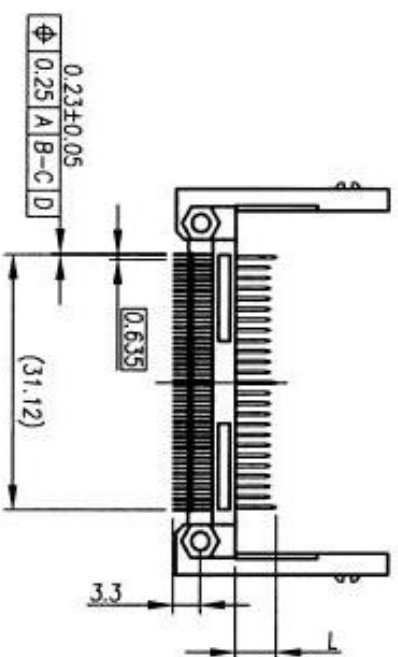
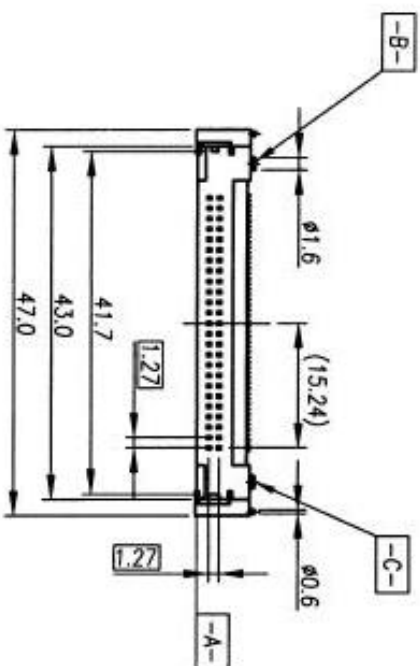
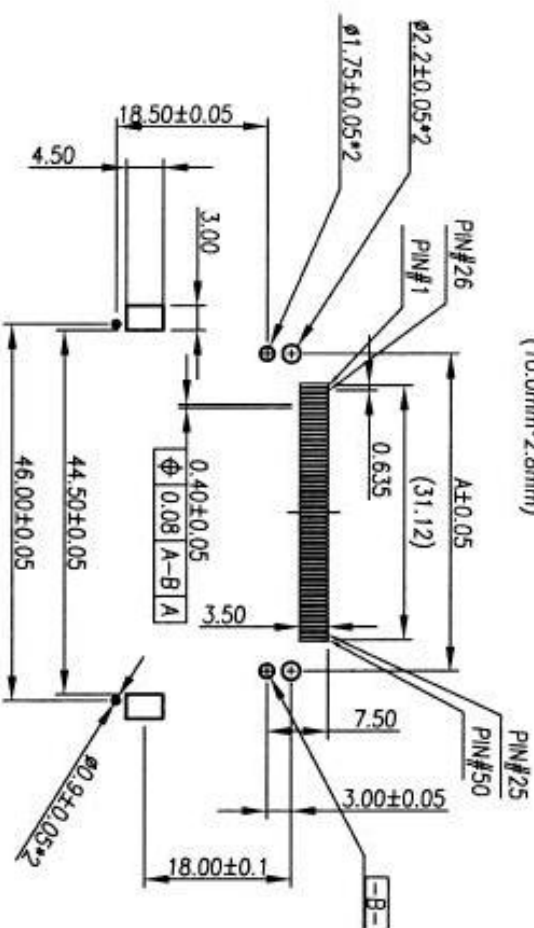
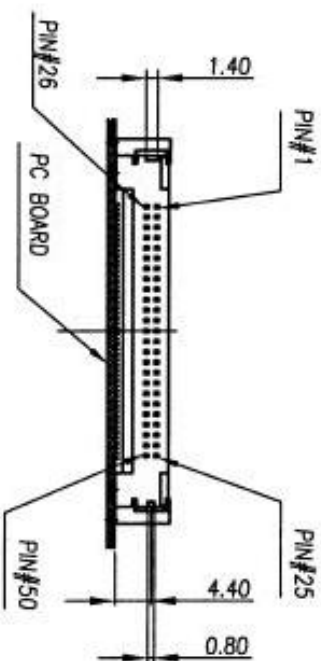


Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	E	EN-04-0818	08/27/04	TONY
General	4.25 mm	All Other Pins	F	EN-04-1025	10/29/04	TONY
Power	5.0 mm	1,13,38,50	G	EN-05-0130	01/24/05	TONY

DIMENSION IN mm (inch)		PROD. SPEC. SP0028	OF CARD CONN. TYPE1.2		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PMG SPEC. PPP-CFC-004	TITLE			
.X±0.30	X.±.1"	APPROVED	STAND-OFF 2.0mm NORMAL TYPE			
.XX±0.20	X.±0.5"	CHECK	FILE NO. KFP-028		DWG NO. CFCMD-45XXXW10X	
.XXX±0.10	.XX±0.25"	DRAW	SIZE A4		PROJ. SCALE 1:1	
					SHEET 1	
					REV G	

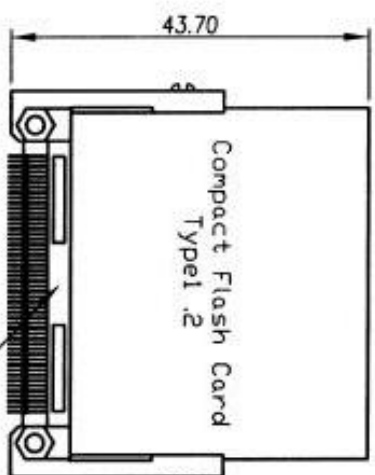

P.C.B Layout

Ordering Information:

CFC M D -4 5 X XX W 1 0 X
 TYPE 2 Pin No. 50 Position Color: W--White. DIM-A 0-38.74 1-40.16
 0 : TIN/LEAD 90/10 1 : LEAD FREE TIN 100% 1 : STANDOFF 2.0mm
 Contact Area Plating: 15--15U" Gold Plating. 30--30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ω max.
 INSULATION RESISTANCE:1000M Ω max.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

REV	MODIFICATION	DATE	DRAW
E	EN-04-0818	08/27/04	TONY
F	EN-04-1025	10/29/04	TONY
G	EN-05-0130	01/24/05	TONY

DIMENSION IN mm (inch)		PROJ. SPEC. SP0028	OF CARD CONN. TYPE1.2		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED	Pkg. SPEC. Pdp-CFC-004	APPROVED	TITLE	STAND-OFF 2.0mm	NORMAL TYPE	
X±0.30	X.± 1"	APPROVED	FILE NO. KFP-028	DWG NO. CFCMD-45XXXW10X	PRCL	SHEET 2
XX±0.20	X.± 0.5"	CHECK			SCALE 1:1	REV G
XXX±0.10	XX.± 0.25"	DESK	SIZE A4			