
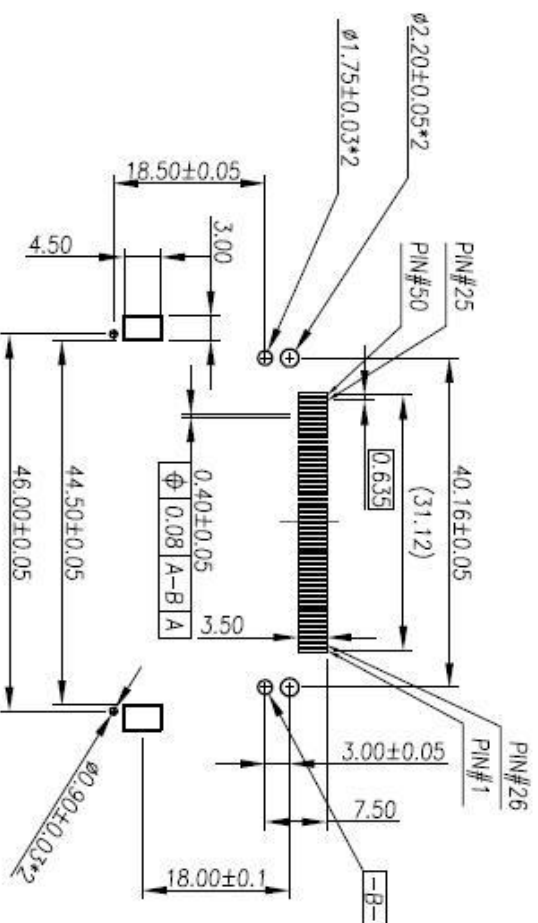


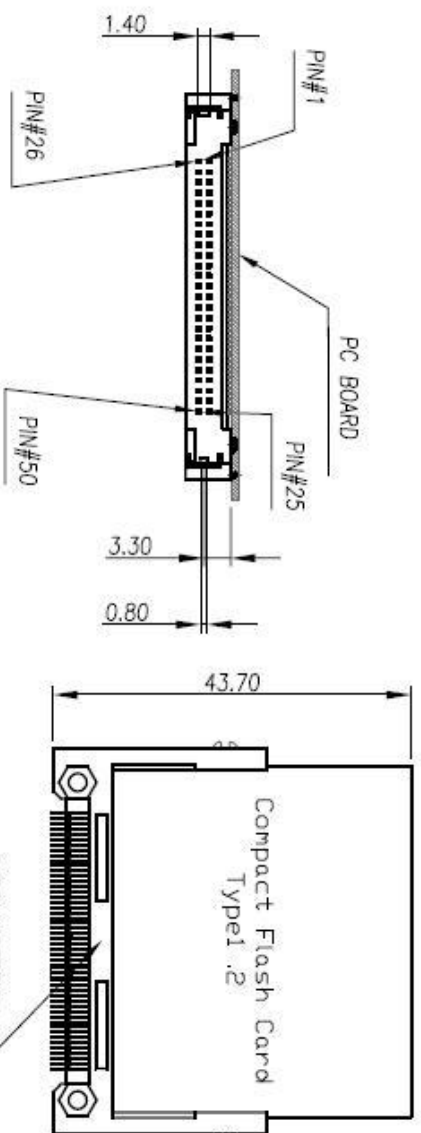

P.C.B. Layout

For Vacuum Pick
(10.0mm*2.8mm)

Ordering Information:

CFC M D - 4 5 X XX W 2 1 1
 Pin No. Color W--White. Dim-A 1-40.16mm
 TYPE 2 1-REVERSE TYPE
 0 : TIN/LEAD 90/10 2 : STANDOFF 1.0mm
 T : LEAD FREE TIN 100%
 Contact Area Plating:
 15-15U" Gold Plating.
 30-30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 mΩ max.
 INSULATION RESISTANCE:1000M Ω min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

REV	MODIFICATION	DATE	DRAW
B	EN-04-0211	02/20/04	TONY
C	EN-05-1004	10/11/05	TONY

DIMENSION IN mm [inch]		PROD. SPEC. SP00028	OF CARD CONN. TYPE1,2 TITLE STAND-OFF 1.0mm REVERSE TYPE		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PPG SPEC. PPP-CFC-004				
X±0.30	X.±.1"	APPROVE	FILE NO. KFP-028	DWG NO. CFCMD-45XXXW211	PROJ.	SHEET 2 / 2
XX±0.20	X.±0.5"	CHECK			SCALE 1:1	REV C
.XXX±0.10	.XX±0.25"	DRAW				