

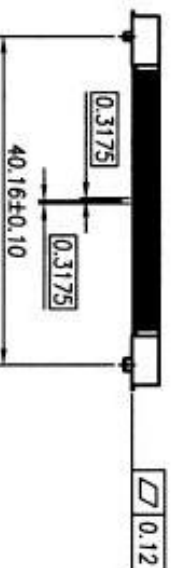
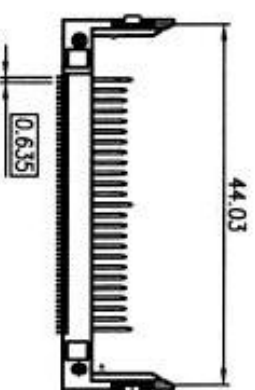

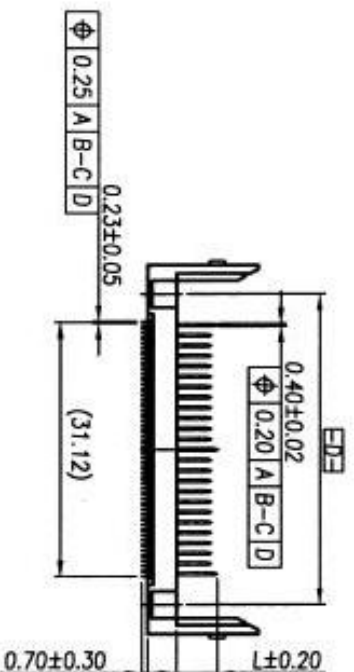


Pin Type	DIM L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-03-1019	10/30/2003	TONY
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

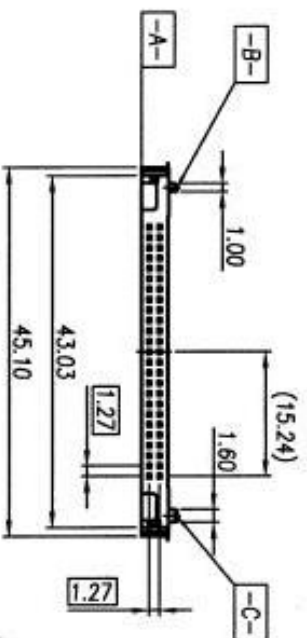


DIMENSION IN mm [inch]		PROD. SPEC. SP0057	CF CARD CONN. TYPE2, SLIM NORMAL TYPE		CUSTOMER DRAWING
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CEC-001			
.X±0.30	X.± 1"	APPROVE <i>[Signature]</i>	FILE NO. KFP-057		DWC NO. CFCMD-750XXB000
.XX±0.20	X.± 0.5"	CHECK <i>[Signature]</i>			
.XXX±0.10	.XX± 0.25"	DRAW <i>[Signature]</i>	SIZE A4	PROJ.	SHEET 1 / 2
				SCALE 1:1	REV B

REV	MODIFICATION	DATE	DRAW
B	EN-03-1019	10/30/2003	TONY

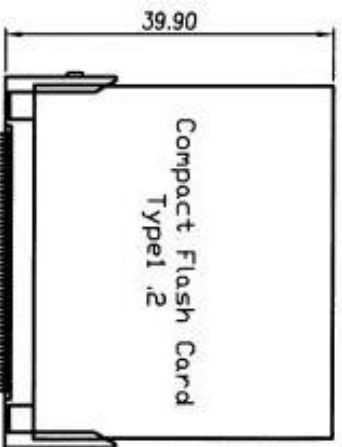

CARD INSERTION

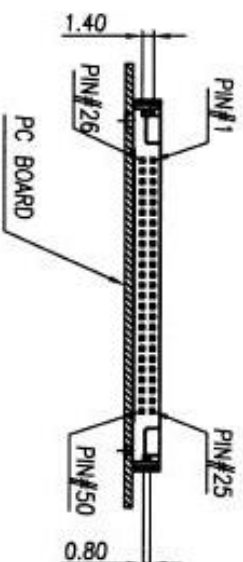

Ordering Information:

CFC M D - 7 50 XX B 0 0 0

Pin No.


Color:
B-Black.

TYPE 2(SLIM)

Contact Area Plating:
15--15U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
CONTACT : Copper Alloys
VOLTAGE RATING : 100VAC
CURRENT RATING : 0.5A
CONTACT RESISTANCE:40 m Ohm max.
INSULATION RESISTANCE:1000M Ohm max.
DIELECTRIC STRENGTH : 500VAC/1min
OPERATION TEMPERATURE : -40°C~85°C

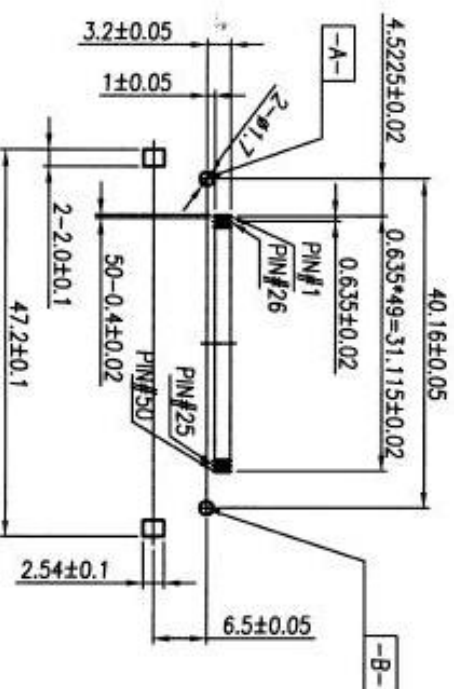

P.C.B Layout

DIMENSION IN mm [inch]		PROJ. SPEC. SP0057		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PBP-CEC-001	TITLE CF CARD CONN. TYPE2 ,SLIM NORMAL TYPE	
.X±0.30	X:± 1"	APPROVE	FILE NO. KFP-057	DWG NO. CFCMD-750XXB000
.XX±0.20	X:± 0.5"	CHECK	SIZE A4	PROJ. SHEET 2
.XXX±0.10	.XX:± 0.25"	DRAW	SCALE 1:1	REV B