

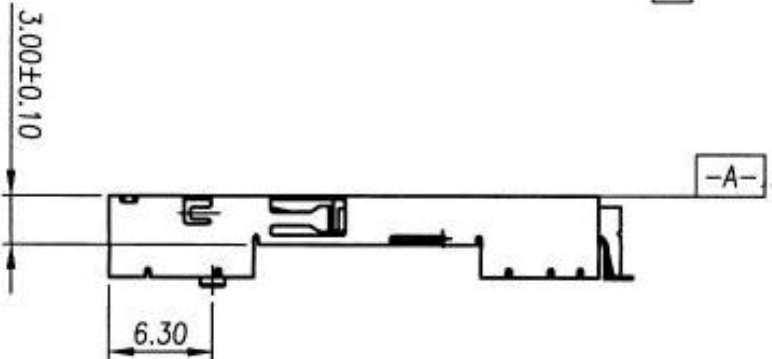


[illegible]

CARD INSERTED
WRITE PROTECT : LOCK



CARD INSERTED
WRITE PROTECT : UNLOCK

SDDMF--0X9XXBOX1

0 : TIN-LEAD 90/10.

-1 : DIM A=2.0mm
-0 : WITHOUT LOGO.
1 : WITH LOGO.

0 : WITHOUT LOGO.
1 : WITH LOGO.


0 : WITHOUT LOGO.
1 : WITH LOGO.

0 : WITHOUT LOGO.
1 : WITH LOGO.

0 : WITHOUT LOGO.
1 : WITH LOGO.

Technical drawing of a 16-pin D-sub connector. The drawing shows a side view of the connector with dimensions. The overall length is 24.30 ± 0.10. The distance between the two rows of pins is 1.45. The distance from the center of the first pin to the center of the last pin is 24.00 ± 0.05. The diameter of the pins is 1.25 ± 0.05. The drawing is labeled with 'DIM A' and '1.60'.

SD CARD PIN ASSIGN	
PIN	NAME
1	CD/DAT3
2	CMD/DI
3	VSS1
4	VDD
5	CLK/SCLK
6	VSS2
7	DATO
8	DAT1
9	DAT2

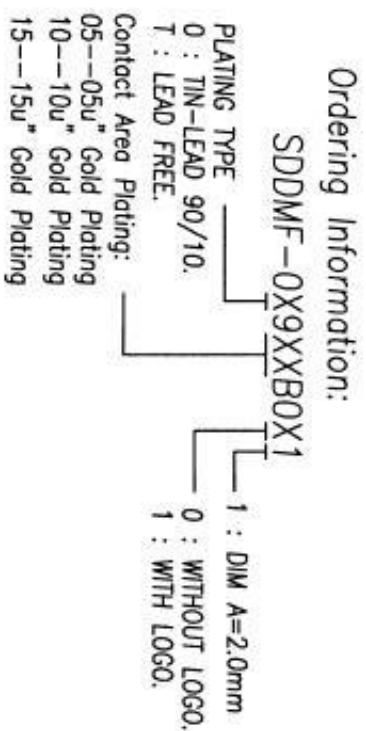

DIMENSION IN mm [inch]		PROD. SPEC. SP0034	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-500-001	
.X±0.30	X±	APPROVE <i>[Signature]</i>	
.XX±0.20	X±	CHECK	
.XXX±0.05	XX±	DRAW	
FILE NO. KFP-034		TITLE SECURE DIGITAL MEMORY CARD PUSH -PUSH CONNECTOR TYPE QY(+2.0mm)	
		CUSTOMER DRAWING	
SIZE A4	DWG NO. SDDMF-0X9XXBOX1		
PROJ. 	SHEET 2 / 2		
SCALE 2:1	REV 0		