

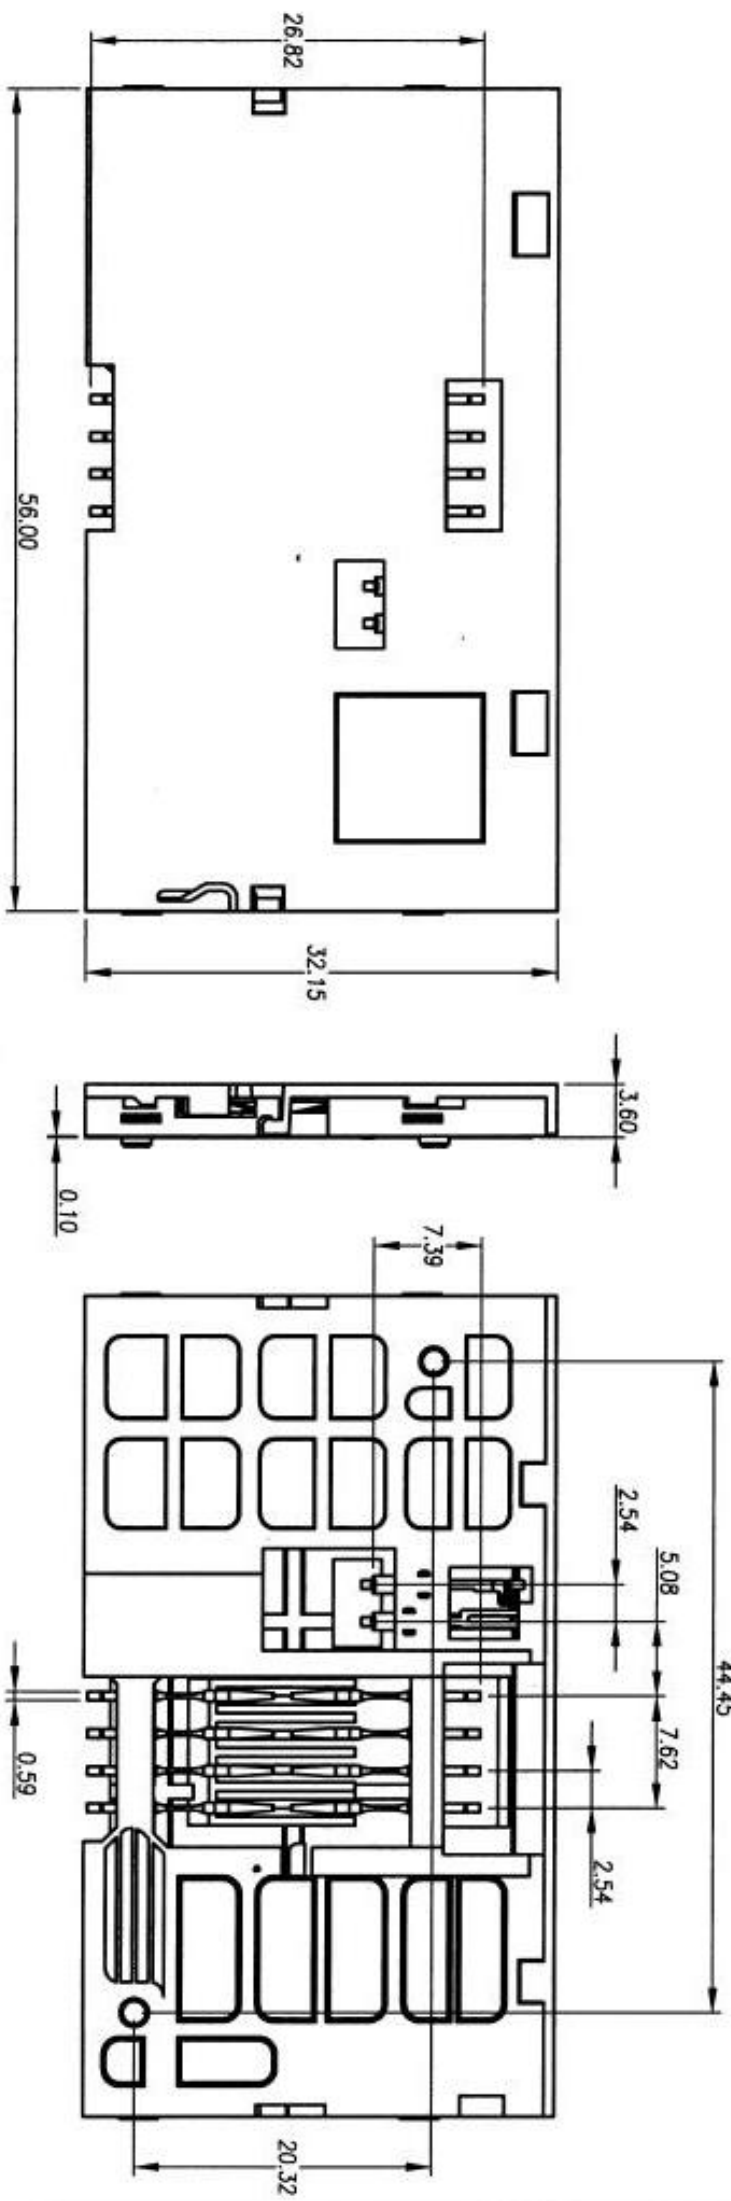
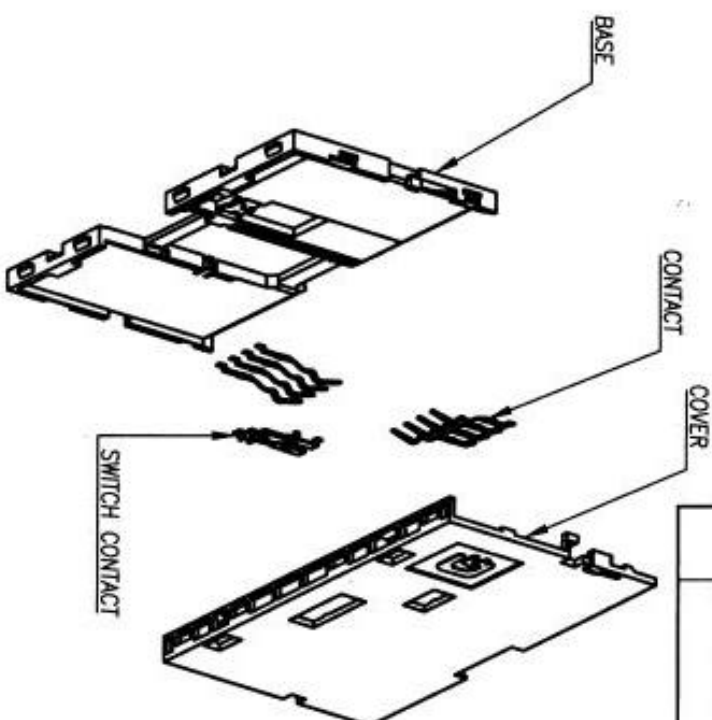


| REV | MODIFICATION | DATE | DRAW |
|-----|--------------|------|------|
|     |              |      |      |
|     |              |      |      |
|     |              |      |      |

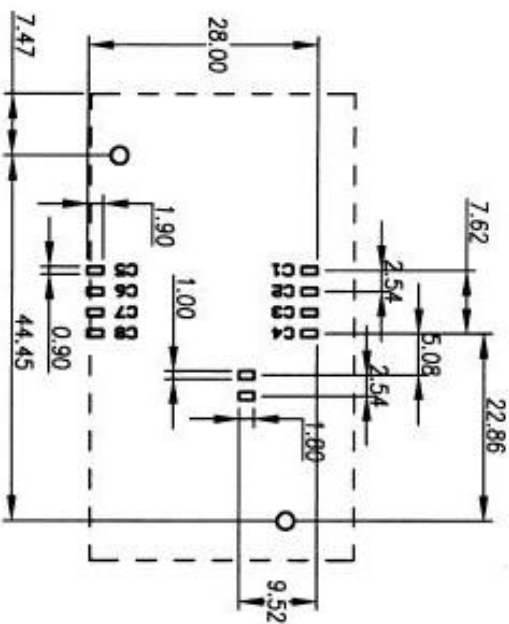

|                                      |      |                            |                                                                                                                                                           |
|--------------------------------------|------|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| DIMENSION IN mm (inch)               |      | PROD. SPEC.                | <div> <div>SCC LOW PROFILE</div> <div>CUSTOMER DRAWING</div> </div>                                                                                       |
| TOLERANCE UNLESS OTHERWISE SPECIFIED |      | PMG. SPEC.                 |                                                                                                                                                           |
| .X±0.30                              | X.±  | APPROV. <i>[Signature]</i> |                                                                                                                                                           |
| .XX±0.20                             | X.±  | CHECK <i>[Signature]</i>   |                                                                                                                                                           |
| .XXX±0.10                            | .XX± | DRAW <i>[Signature]</i>    | <div> <div>FILE NO.</div> <div>DWG NO. SMCMB-20830B1015</div> </div> <div> <div>SIZE A4</div> <div>PROJ.  SCALE 1.8:1</div> <div>SHEET 1 / 2</div> </div> |

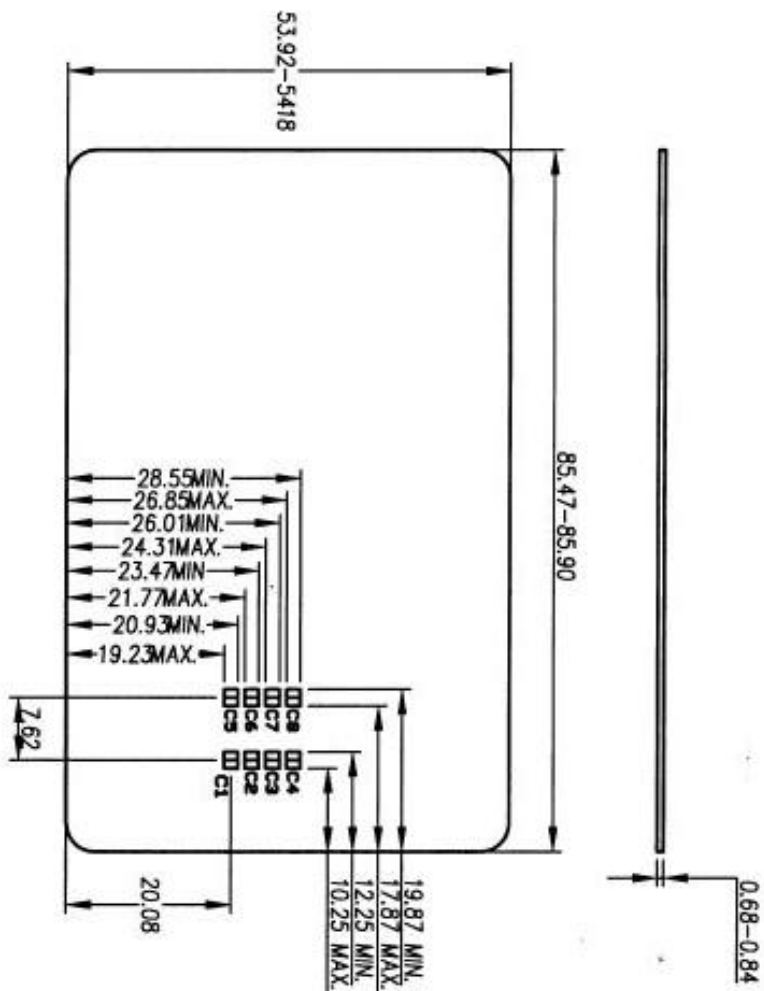

**SPECIFICATION:**  
 VOLTAGE RATING:50V DC MAX.  
 CURRENT RATING:0.5A MAX.  
 OPERATING TEMPERATURE:-20°C~+80°C.  
 INSULATION RESISTANCE:1000 MΩ MIN.  
 CONTACT RESISTANCE:100 MΩ MAX.  
 SWITCH TYPE:OPEN&CLOSE.  
 SOLDERABILITY:  
 VAPORPHASE:215°C 30 SEC MAX.  
 IR REFLOW:230°C 10~15 SEC MAX.  
 MANUAL SOLDERING:360°C 3 SEC MAX.

**MATERIAL:**  
 BASE :PA-9T UL 94V-0  
 COVER:PA-9T UL 94V-0  
 CONTACT :COPPER ALLOY.  
 FINISH:  
 CONTACT:TM/GOLD PLATER

**ORDER INFORMATION:**  
 SMCMB-2083081015

| DIMENSION IN mm [inch]               |     | PROD. SPEC.              |  |  |
|--------------------------------------|-----|--------------------------|--|--|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |     | FIG. SPEC.               |  |  |
| .X±0.30                              | X.± | APPROVE                  |  |  |
| .XX±0.20                             | X.± | CHECK                    |  |  |
| .XXX±0.10                            | XX± | DRAW                     |  |  |
|                                      |     | FILE NO.                 |  |  |
|                                      |     | DWG NO. SMCMB-2083081015 |  |  |
|                                      |     | PROJ. SCALE 1:1          |  |  |
|                                      |     | SHEET 2                  |  |  |
|                                      |     | REV A                    |  |  |

| REV | MODIFICATION | DATE | DRAW |
|-----|--------------|------|------|
|     |              |      |      |
|     |              |      |      |
|     |              |      |      |