





85.47~85.90

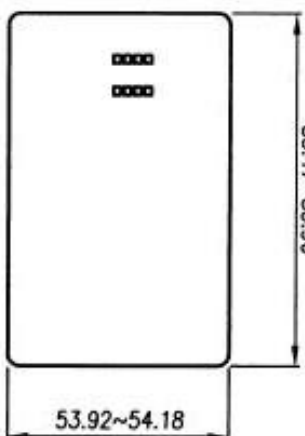

Thickness 0.68~0.84 mm
Contact Specification Refer to EMV

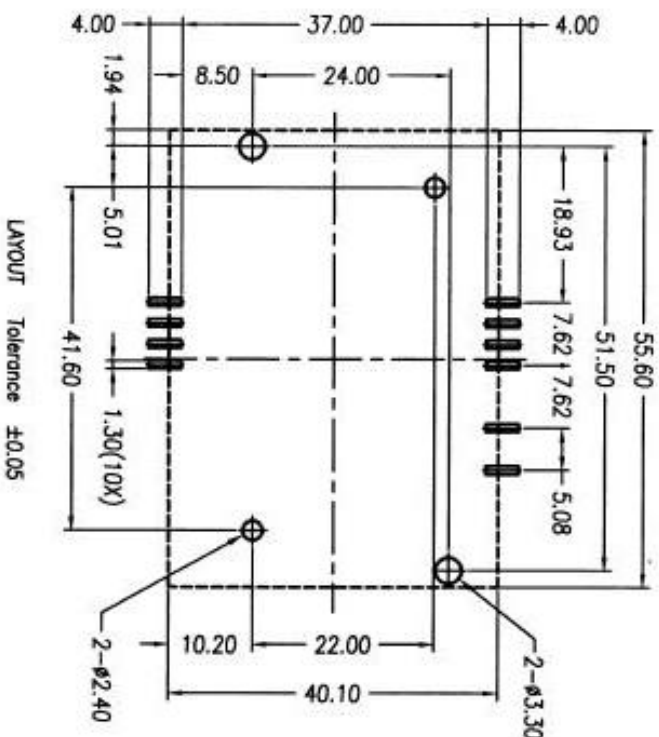

LAYOUT Tolerance ±0.05

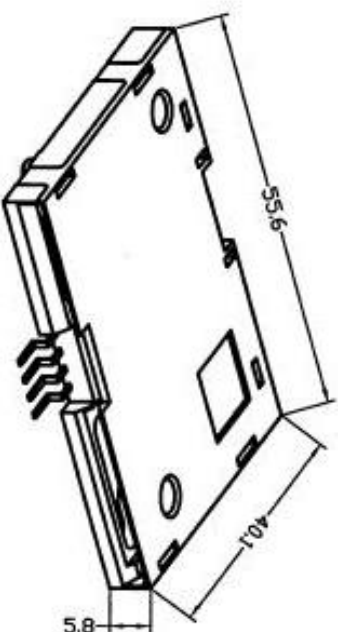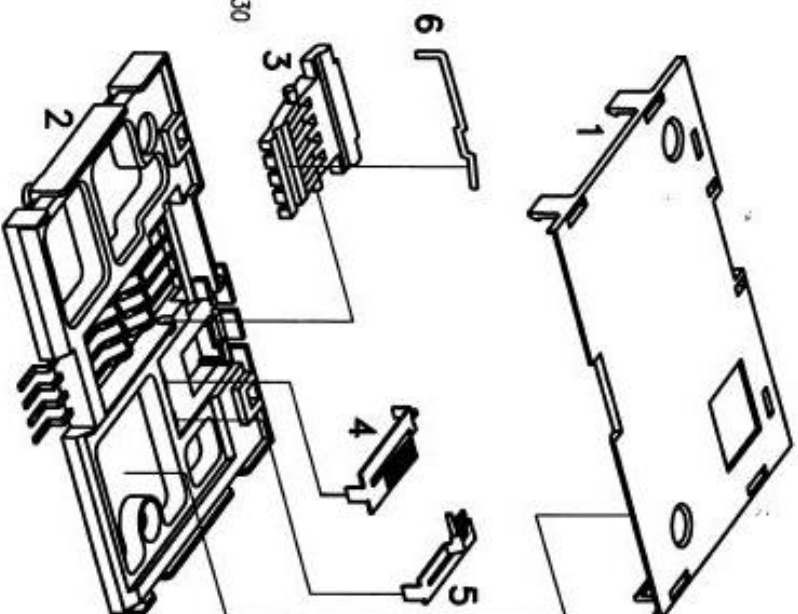

Note

- 1)Material:
Housing: PBT(UL94V-0) rated •
Cover: PBT(UL94V-0) rated
Clutch: PPS (UL94V-0) rated
Contact: Copper Alloy
- 2). SPECIFICATION
VOLTAGE RATING : 50V DC MAX
CURRENT RATING : 0.5A MAX
OPERATING TEMPERATURE : -20°C ~ +80°C
INSULATION RESISTANCE: 1000 MΩ Min
CONTACT RESISTANCE: 100 mΩ Max
3). SWITCH TYPE:OPEN

REV	MODIFICATION	DATE	DRAW

DIMENSION IN mm [inch]		PROD. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.
.X±0.35	X.±.3	APPROVE <i>[Signature]</i>
.XX±0.20	.X±	CHECK <i>[Signature]</i>
.XXX±	.XX±	DRAW <i>[Signature]</i>
TITLE SMART CARD CONNECTOR LANDING SMT		CUSTOMER DRAWING
FILE NO.		DWG NO. SMCMB-208308103-H58
SIZE A4		PROJ. SHEET 1 / 1
SCALE 1:1		REV A