

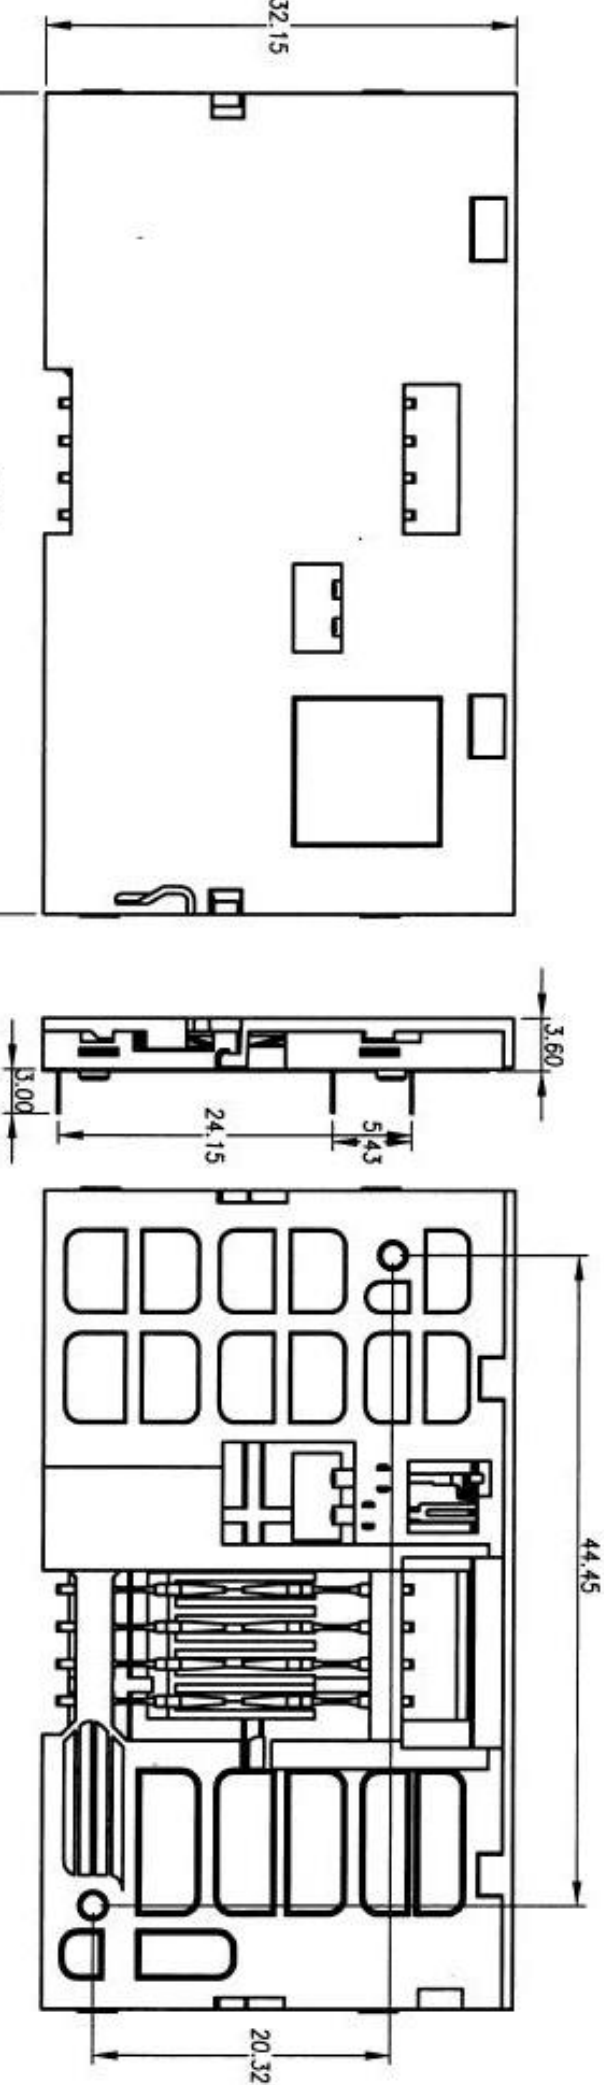
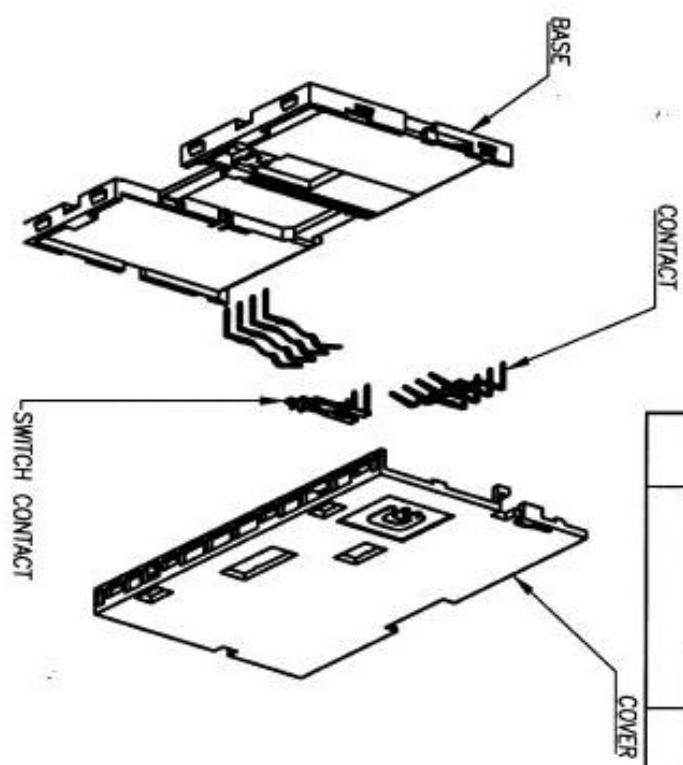


| REV | MODIFICATION | DATE | DRAW |
|-----|--------------|------|------|
|     |              |      |      |
|     |              |      |      |
|     |              |      |      |

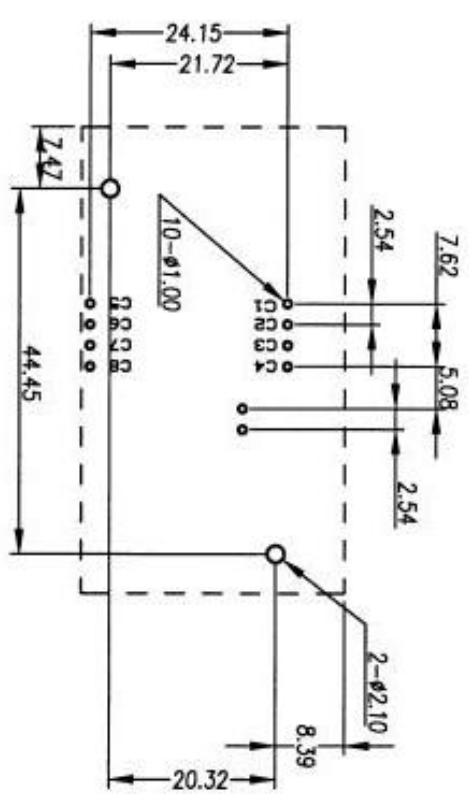

| DIMENSION IN mm [inch]               |       | PROJ. SPEC. | TITLE        |  | CUSTOMER DRAWING         |  |
|--------------------------------------|-------|-------------|--------------|--|--------------------------|--|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |       | PRG. SPEC.  | SCC LOW TYPE |  | SLIDING DIP TYPE         |  |
| .X±0.30                              | X.±   | APPROVE     | FILE NO.     |  | DWG NO. SMCRB-208308101S |  |
| .XX±0.20                             | .X.±  | CHECK       | SIZE         |  | SCALE                    |  |
| .XXX±0.10                            | .XX.± | DRAW        | A4           |  | 1.8:1                    |  |
|                                      |       |             |              |  | SHEET 1                  |  |
|                                      |       |             |              |  | 2                        |  |

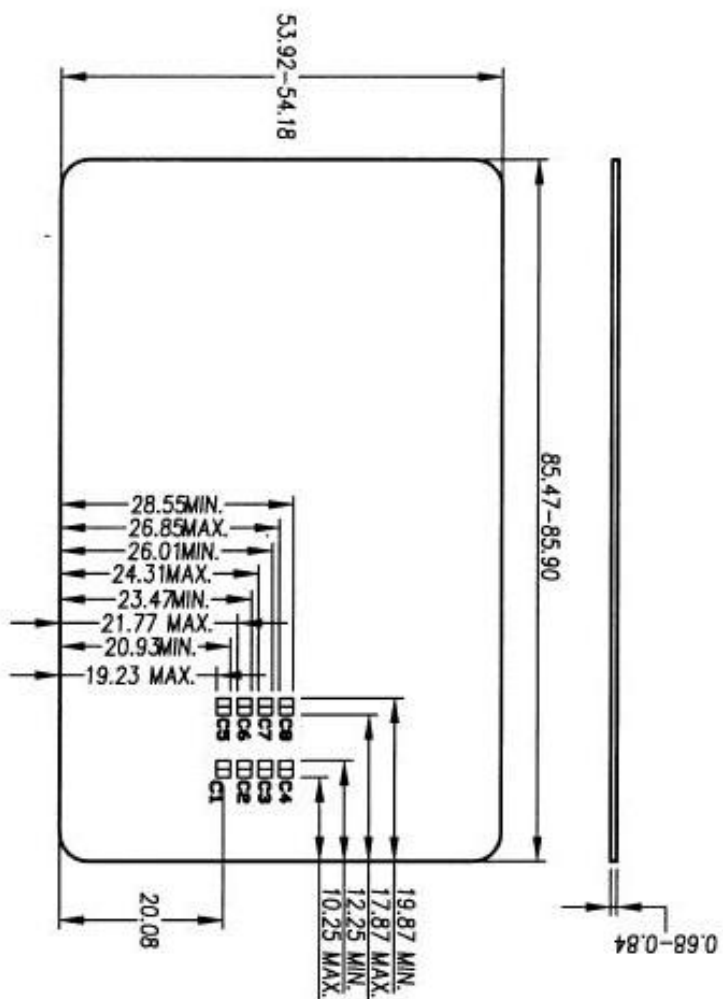

| REV | MODIFICATION | DATE | DRAW |
|-----|--------------|------|------|
|     |              |      |      |
|     |              |      |      |
|     |              |      |      |

**SPECIFICATION:**  
 VOLTAGE RATING: 50V DC MAX.  
 CURRENT RATING: 0.5A MAX.  
 OPERATING TEMPERATURE: -20°C ~ +80°C.  
 INSULATION RESISTANCE: 1000 MΩ MIN.  
 CONTACT RESISTANCE: 100 MΩ MAX.  
 SWITCH TYPE: OPEN & CLOSE.  
**SOLDERABILITY:**  
 VAPOR PHASE: 215°C 30 SEC MAX.  
 IR REFLOW: 230°C 10~15 SEC MAX.  
 MANUAL SOLDERING: 360°C 3 SEC MAX.

**MATERIAL:**  
 BASE: PA-9T UL 94V-0  
 COVER: PA-9T UL 94V-0  
 CONTACT: COPPER ALLOY.  
 FINISH:  
 CONTACT: TIN/GOLD PLATED

**ORDER INFORMATION:**  
 SMCRB-2083081015

| DIMENSION IN mm [inch]               |     | PROD. SPEC. | TITLE            |  | CUSTOMER DRAWING         |  |
|--------------------------------------|-----|-------------|------------------|--|--------------------------|--|
| TOLERANCE UNLESS OTHERWISE SPECIFIED |     | PKG. SPEC.  | SCC LOW PROFILE  |  |                          |  |
| .X±0.30                              | X.± | APPROVE     | SLIDING DIP TYPE |  |                          |  |
| .XX±0.20                             | X.± | CHECK       | FILE NO.         |  | DWG NO. SMCRB-2083081015 |  |
| .XXX±0.10                            | XX± | DRAW        | SIZE A4          |  | SCALE 1:1                |  |
|                                      |     |             |                  |  | SHEET 2 / 2              |  |
|                                      |     |             |                  |  | REV A                    |  |