
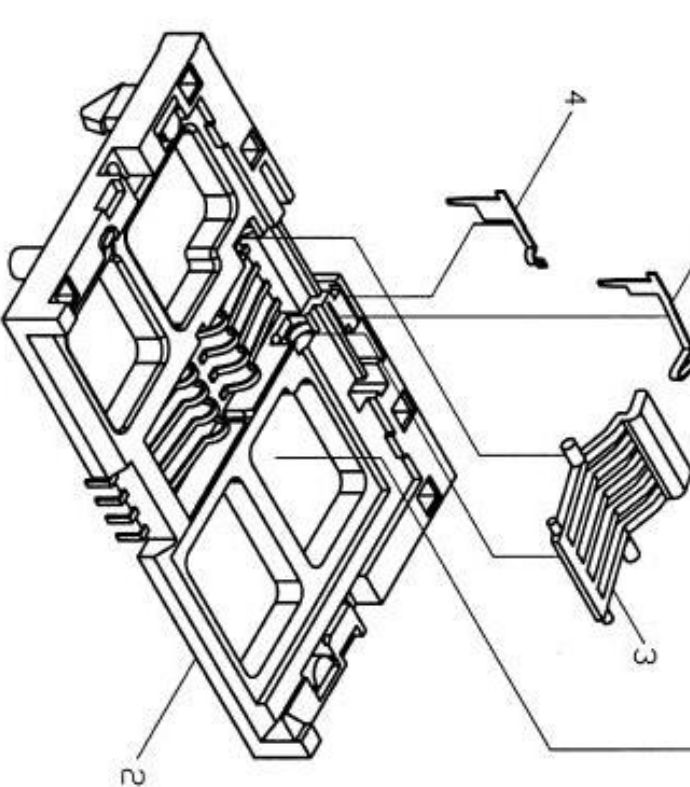


REV	MODIFICATION	DATE	DRAW

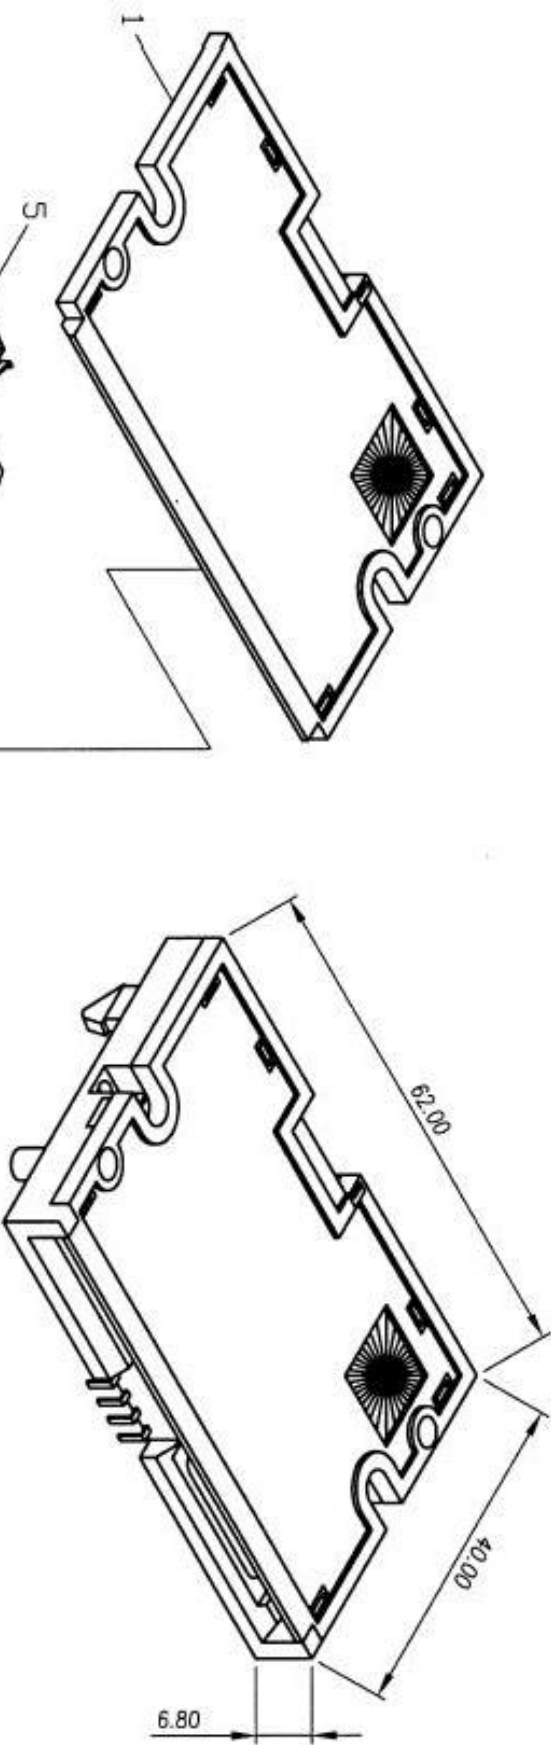

Note

1) Material:

Housing: PBT(UL94V-0) rated

Cover: PBT(UL94V-0) rated

Clutch: PPS (UL94V-0) rated

Contact: Copper Alloy

2). SPECIFICATION

VOLTAGE RATING : 50V DC MAX

CURRENT RATING : 0.5A MAX

OPERATING TEMPERATURE : -20°C ~ +80°C



INSULATION RESISTANCE: 1000 MΩ Min

CONTACT RESISTANCE: 100 mΩ Max

v1

DIMENSION IN mm [inch]		PROD. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.
.XX±0.30	X.±1"	APPROVE
.XX±0.20	X.±0.5"	CHECK
.XXX±0.10	XX±0.25"	DRAW

SMART CARD CONNECTOR		CUSTOMER DRAWING	
TITLE	SEESAW LANDING TYPE	FILE NO.	DMG NO. SMCRB-208308103-H68
SIZE	A4	SCALE	1:1
PROJ.	1:1	SHEET	1 / 2
REV	A		

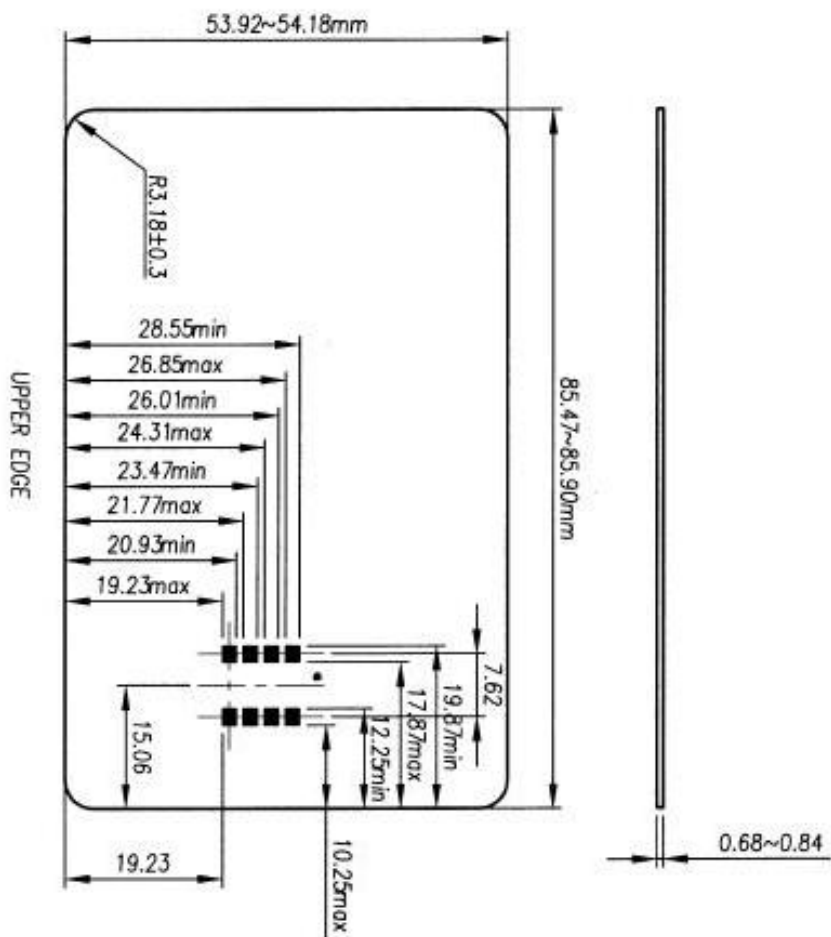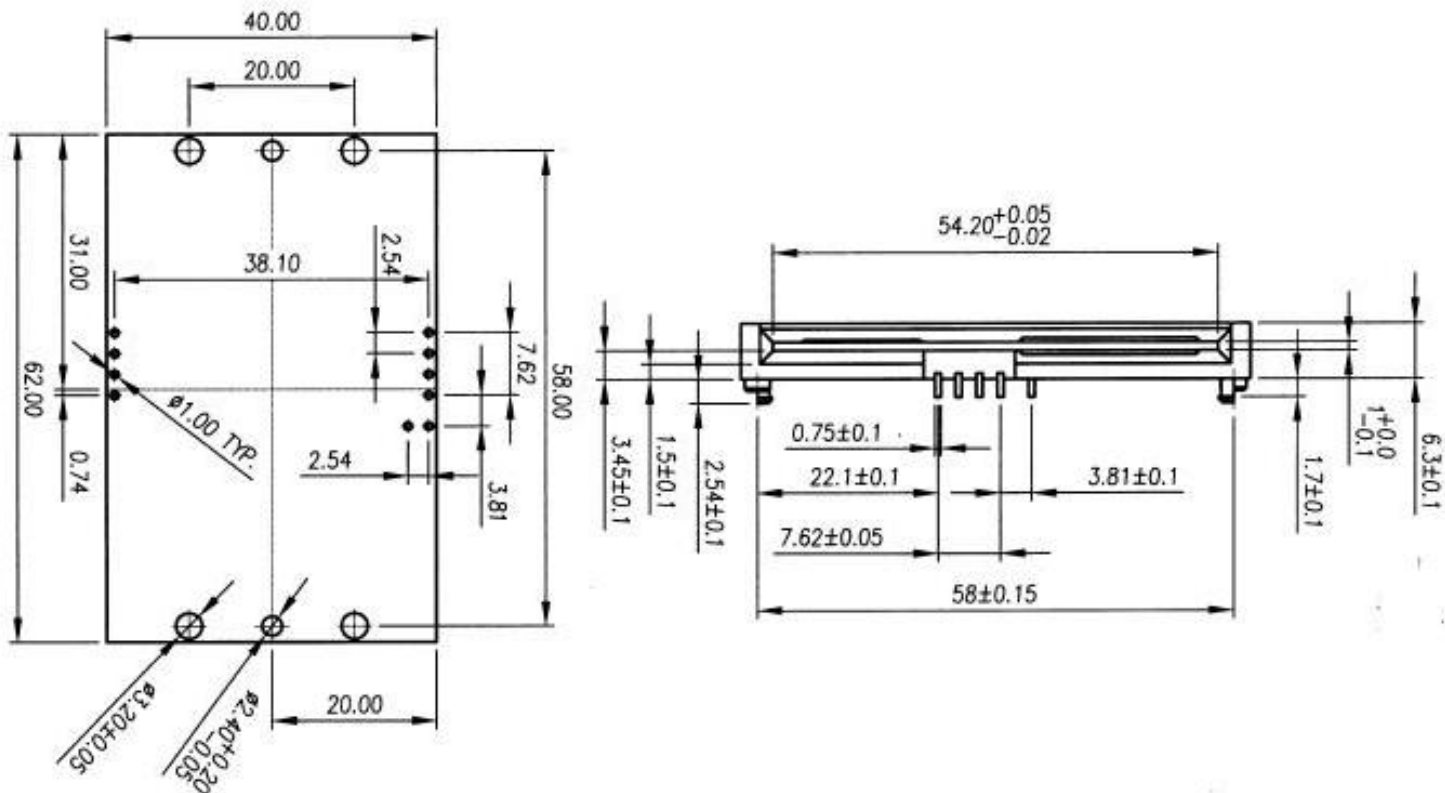

DIMENSION IN mm [inch]		PROD. SPEC.	SMART CARD CONNECTOR		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	APPROVE	TITLE	FILE NO.	DMG NO.	SHEET 2
.X ± 0.30	X' $\pm 1'$	3/1/03	SEESAW LANDING TYPE	DMC NO.	SMCRB-20830B103-H68	2
.XX ± 0.20	X' $\pm 0.5'$	CHECK	SIZE	SCALE	REV	A
.XXX ± 0.10	.XX' $\pm 0.25'$	DRW	A4	1:1	A	

REV	MODIFICATION	DATE	DRAW