


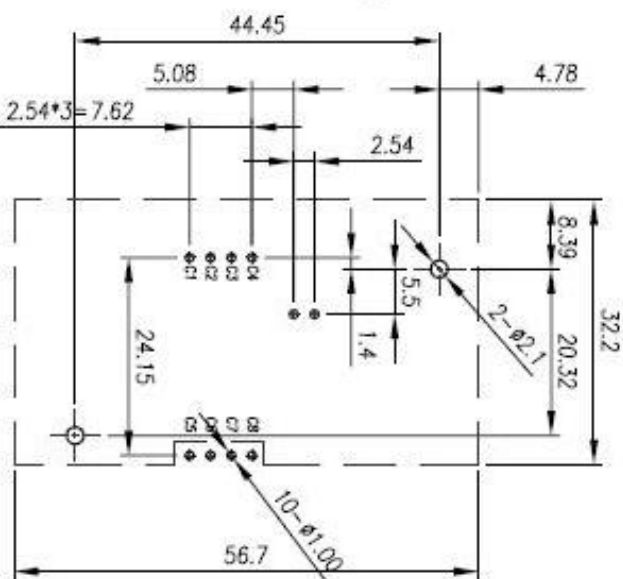
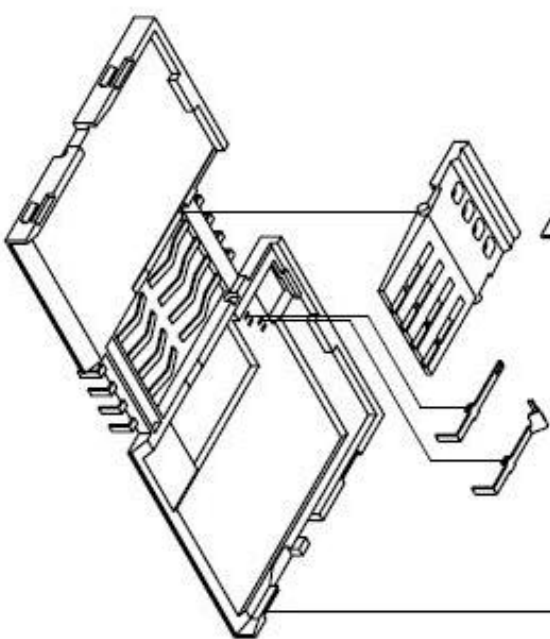
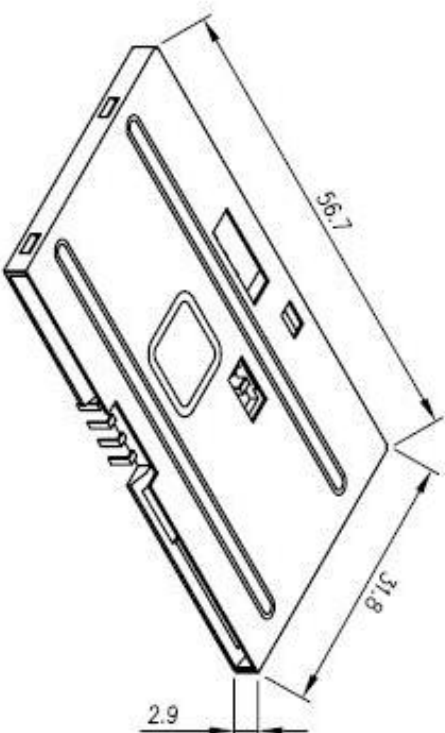


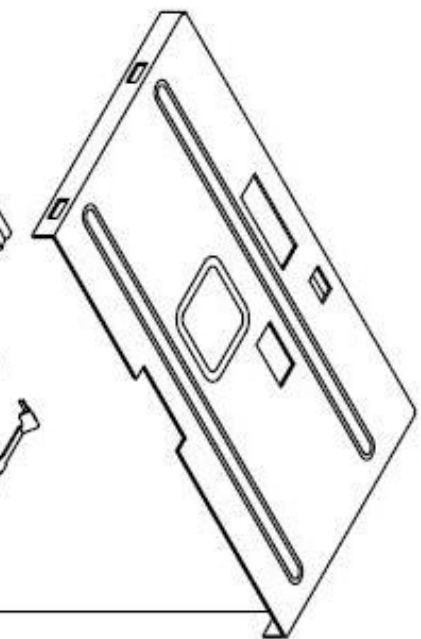

DIP LAYOUT TOLERANCE±0.05

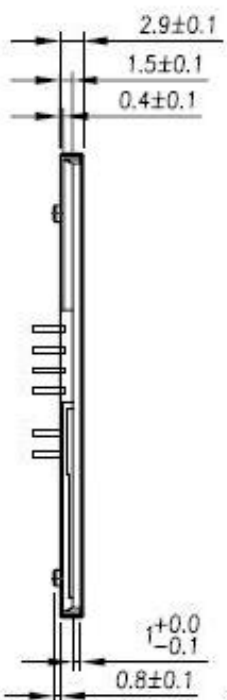

- 1) MATERIAL:
 BASE: PA-9T,UL94V-0
 COVER: PA-9T,UL94V-0
 CLUTCH: PPS+60%GF,UL94-0
 TERMINAL: COPPER ALLOY
- 2). SPECIFICATION
 VOLTAGE RATING : 50V DC MAX
 CURRENT RATING : 0.5A MAX
 OPERATING TEMPERATURE : -20°C ~ +80°C
 INSULATION RESISTANCE: 1000 MΩ Min
 CONTACT RESISTANCE: 100 mΩ Max

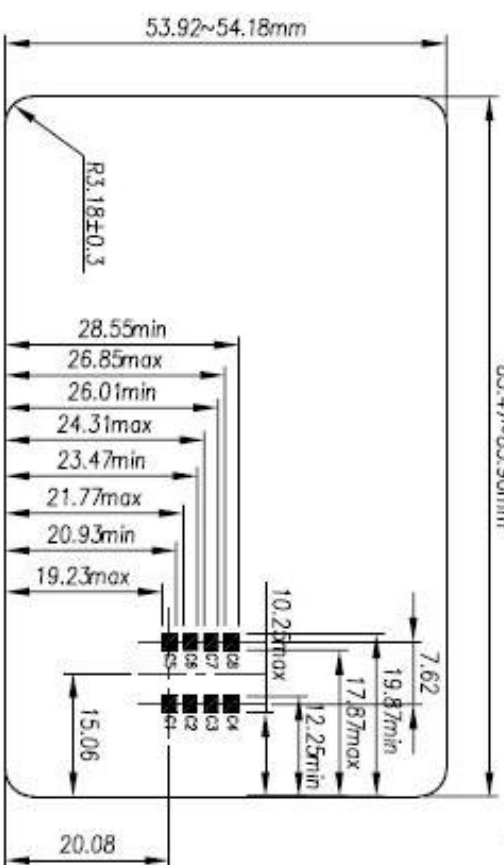

UPPER EDGE

DIMENSION IN mm [inch]		PROD. SPEC.
TOLERANCE UNLESS OTHERWISE SPECIFIED		
.X±0.30	X. ± .1"	APPROVE
.XX±0.20	X. ± 0.5"	CHECK
.XXX±0.10	.XX ± 0.25"	DRAW

TITLE	SMART CARD CONNECTOR	CUSTOMER DRAWING
FILE NO.	DWG NO. SMCRB-208308103-H29	
SIZE	A4	
SCALE	1:1	REV A

REV	MODIFICATION	DATE	DRAW